

A3

D13



Publication number: **0 268 237 A2**

EUROPEAN PATENT APPLICATION

(1) Application number: 87116861.3

(51) Int. Cl. 4: G01N 1/10, G01N 35/00, G01F 11/02

(2) Date of filing: 16.11.87

(3) Priority: 17.11.86 US 931476

(4) Date of publication of application: 25.05.88 Bulletin 88/21

(6) Designated Contracting States: AT BE CH DE ES FR GB GR IT LI LU NL SE

(7) Applicant: ABBOTT LABORATORIES

Abbott Park Illinois 60064(US)

(7) Inventor: Hayes, Donald J.

2012 Tampicko Drive

Plano Texas 75075(US)

Inventor: Wallace, David B.

9929 Wood Forest

Dallas Texas 75243(US)

Inventor: Verlee, Donald J.

563 Drake Street

Libertyville Illinois 60048(US)

Inventor: Houseman, Kenneth R.


1520 S. Main Street

Racine Wisconsin 53403(US)

(24) Representative: Modiano, Guido et al
MODIANO, JOSIF, PISANTY & STAUB
Modiano & Associati Via Meravigli, 16
I-20123 Milan(IT)

(54) Apparatus and process for reagent fluid dispensing and printing.

(57) A system for printing and dispensing chemical reagents in precisely controlled volumes onto a medium at a precisely controlled location. A jetting tube, comprising an orifice at one end and a fluid receiving aperture at the other end, is concentrically mounted within a cylindrical piezo-electric transducer. The fluid receiving aperture is connected to a reservoir containing a selected reagent by means of a filter. The reservoir is pressurized by a regulated air supply. An electrical signal of short duration is applied to the transducer. The pulse causes the transducer and the volume defined by the jetting tube to expand, thereby drawing in a small quantity of reagent fluid. The cessation of the pulse causes the transducer and the volume of the jetting tube to de-expand, thereby causing at least a substantially uniformly sized droplet of reagent fluid to be propelled through the orifice. The droplet may be directed to impact a printing medium or collected in a dispensing receptacle.

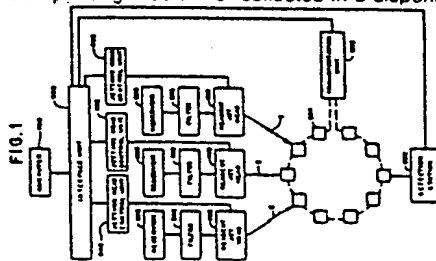

Xerox Copy Centre

EP 0 268 237 A2

0 268 237

APPARATUS AND PROCESS FOR REAGENT FLUID DISPENSING AND PRINTING

BACKGROUND OF THE INVENTION

6 The present invention relates to an apparatus and process for dispensing and printing reagent fluids, wherein a transducer is used to propel small quantities of the fluid towards a positioned target.

Diagnostic assays often require systems for metering, dispensing and printing reagent fluids. In the case of metering and dispensing, such systems comprise both manual and automatic means. For purposes of practicality, the present background discussion will focus on the methods of metering and dispensing 100 micro-liter volumes or less.

10 The manual systems of metering and dispensing include the glass capillary pipet; the micro-pipet; the precision syringe; and weighing instruments. The glass capillary pipet is formed from a precision bore glass capillary tube. The pipet typically comprises a fire blown bulb and a tubular portion fire drawn to a fine point. Fluid is precisely metered by aspirating liquid through the tube into the bulb to a predetermined level indicated by an etched mark. The fluid may then be dispensed by blowing air through the tube.

15 The micro-pipet typically comprises a cylinder and a spring loaded piston. The travel of the piston is precisely determined by a threaded stop. The distance the piston travels within the cylinder and the diameter of the cylinder define a precise volume. The fluid is aspirated into and dispensed from the micro-pipet in precise quantities by movement of the piston within the cylinder.

20 The precision syringe generally comprises a precisely manufactured plunger and cylinder with accurately positioned metering marks. The fluid is introduced into and dispensed from the syringe by movement of the plunger between the marks.

Weighing techniques for dispensing fluids often simply involve weighing a quantity of fluid. The density of the fluid may then be used to determine the fluid volume.

25 Exemplary automatic metering and dispensing systems include the precision syringe pump; the peristaltic pump; and the high performance liquid chromatography (HPLC) metering valve. The precision syringe pump generally comprises a precision ground piston located within a precision bore cylinder. The piston is moved within the cylinder in precise increments by a stepping motor.

30 The peristaltic pump comprises an elastomeric tube which is sequentially pinched by a series of rollers. Often the tube is placed inside a semi-circular channel and the rollers mounted on the outer edge of a disc driven by a stepping motor. The movement of the rollers against the tubing produces peristaltic movement of the fluid.

The HPLC metering valve comprises a defined length of precision inner diameter tubing. The fluid is introduced into the defined volume of the tubing with the valve in a first position and then dispensed from the tubing when the valve is placed in a second position.

35 All of the above metering and dispensing systems have the disadvantage that the volumes dispensed are relatively large. Furthermore, these systems are also relatively slow, inefficient and comprise precision fitted components which are particularly susceptible to wear.

40 The printing of reagent fluids is frequently required in the manufacture of chemical assay test strips. Selected reagents are printed in a desired configuration on strips of filter paper. The strips may then be used as a disposable diagnostic tool to determine the presence or absence of a variety of chemical components.

45 Generally, to perform a chemical assay with a test strip, the strip is exposed to a fluid or a series of fluids to be tested, such as blood, serum or urine. In some instances, the strip is rinsed and processed with additional reagents prior to being interpreted. The precise interpretation depends on the type of chemical reactions involved, but it may be as simple as visually inspecting the test strip for a particular color change.

The manufacture of test strips generally involves either a manufacturing process or a blotting process. The blotting process is the simplest manufacturing method and permits most reagents to be applied without modification. A disadvantage of this process is that it is difficult to blot the fluids onto the test strip with precision.

50 The printing process will often involve any of three well known methods: silk screening; gravure; and transfer printing. The silk screening of reagents generally involves producing a screen by photographic methods in the desired configuration for each reagent to be printed. The screen is exposed under light to a preselected pattern and then developed. The areas of the screen which are not exposed to light, when developed, become porous. However, the areas of the screen which have been exposed to light remain relatively nonporous. The screen is then secured in a frame and the test strip placed below. The desired

reagent fluid, specially prepared to have a high viscosity, is spread over the top side of the screen. The reagent passes through the porous areas of the screen and onto the test strip. The test strip is then subjected to a drying process, specific to each reagent. Once the test strip is dry, it may be printed again using a different screen, pattern and reagent.

5 The gravure method of printing reagents comprises coating a metal surface with a light sensitive polymer. The polymer is exposed to light in the desired predetermined pattern. When developed, the polymer creates hydrophilic and hydrophobic regions. The reagent is specially prepared such that when applied to the metal it will adhere only to the hydrophilic regions. After the specially prepared reagent is applied, the test strip is pressed against the metal and the reagent is transferred from the metal to the test strip.

10 The transfer printing method comprises transferring the reagents from a die to the test strip in the desired pattern. The die is made with the appropriate pattern on its surface and then coated with the desired, specially prepared reagent. A rubber stamp mechanism is pressed against the die to transfer the reagent in the desired pattern from the die to the rubber stamp. The rubber stamp is then pressed against the test strip to transfer the reagent, in the same pattern, to the test strip.

15 Each of the above-mentioned reagent printing techniques has significant disadvantages. The most common disadvantage is the requirement that the reagents must be specially prepared. Additionally, if a variety of reagents are to be printed onto a single test strip, the strip must be carefully aligned prior to each printing. This alignment procedure increases the cost and decreases the throughput of the printing process. Moreover, a special die or screen must be produced for each pattern to be printed. A further disadvantage arises in that the above printing methods are unable to place reproduceable minute quantities of reagent on the test strip.

It is an object of the present invention to provide a printing and dispensing method and apparatus which avoids these disadvantages.

25 SUMMARY OF THE PRESENT INVENTION

The present invention is directed to a reagent dispensing and printing apparatus and method, wherein the apparatus comprises a transducer operative to eject a substantially uniform quantity of reagent in a precise predetermined direction.

According to one preferred embodiment of the present invention used in dispensing reagent fluids, a jetting tube is concentrically located with a piezoelectric transducer. The jetting tube comprises an orifice at one end and a reagent receiving aperture at the other end. The receiving end of the jetting tube is connected to a filter which is in turn connected to a reservoir containing a selected reagent. A jetting control unit supplies an electrical pulse of short duration to the transducer in response to a command issued by a computer. The electrical pulse causes the volume defined by the jetting tube to expand by an amount sufficient to intake a small quantity of reagent fluid from the reservoir. At the end of the pulse duration, the transducer de-expands propelling a small quantity of the reagent fluid through the orifice and into a fluid receptacle. If desired, additional droplets may be deposited in the receptacle or the receptacle aligned with an additional jetting tube for receiving an additional reagent fluid.

40 An additional preferred embodiment of the present invention may be used for printing reagent fluids onto a print medium. In this embodiment, the jetting tube is aligned with the printing medium such that the propelled droplet impacts a precise position on the medium. The jetting tube or print medium may then be repositioned and another droplet expelled from the jetting tube. The process may be repeated until a desired configuration of the reagent fluid is printed on the medium.

One advantage of the present invention is that precise minute quantities of reagent fluid may be dispensed or printed in a reproducible manner. Additionally, the method and apparatus may be used to emit droplets of fluids having a wide range of reagent fluid viscosities and surface tensions. The reagents do not in general have to be specially adapted for use with the present invention.

50 The invention itself, together with further objects and attendant advantages, will best be understood by reference to the following detailed description, taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

- FIGURE 1 is a schematic representation of a first preferred embodiment of the present invention showing the use of multiple jetting heads to meter and dispense reagent fluid.
- FIGURE 2a is a perspective view of a first preferred embodiment of the jetting head of the present invention.
- FIGURE 2b is a cut-away perspective view of the preferred embodiment of Fig. 2a taken along lines 2b-2b with the contact pins removed.
- FIGURE 2c is a sectional representation of the preferred embodiment of Fig. 2a taken along lines 2c-2c.
- FIGURE 2d is a sectional representation of the preferred embodiment of Fig. 2c taken along lines 2d-2d.
- FIGURE 2e is a sectional representation of the jetting tube and transducer of the preferred embodiment of Fig. 2b taken along lines 2e-2e.
- FIGURE 3 is a schematic representation of a second preferred embodiment operating in the drop on demand mode as a reagent printing system.
- FIGURE 4 is a schematic representation of a third preferred embodiment operating in the continuous mode as a reagent printing system.
- FIGURE 5a is a schematic representation of a portion of the jetting head control unit showing the LED strobe circuit.
- FIGURE 5b is a schematic representation of a portion of the jetting head control unit showing the high voltage power supply circuit.
- FIGURE 5c is a schematic representation of a portion of the jetting head control unit showing the print control circuit.
- FIGURE 5d is a schematic representation of a portion of the jetting head control unit showing a portion of the print pulse generator.
- FIGURE 5e is a schematic representation of a portion of the jetting head control unit showing an additional portion of the pulse generator.
- FIGURE 6a is a perspective view of a second preferred embodiment of the jetting head of the present invention.
- FIGURE 6b is an exploded view of the preferred embodiment of Fig. 6a.
- FIGURE 7 is a sectional representation of a third preferred embodiment of the jetting head of the present invention.
- FIGURE 8 is a sectional view of a symmetrical portion of a fourth preferred embodiment of the jetting head of the present invention.
- FIGURE 9 is a graph of the drop mass of the emitted droplets as a function of emission frequency for several fluid viscosities.
- FIGURE 10 is a graph of the velocity of the emitted droplets as a function of frequency for several fluid viscosities.
- FIGURE 11 is a graph of the total weight of fluid emitted as a function of the number of emitted droplets for a given fluid.

DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

Turning now to the drawings, Fig. 1 shows a schematic representation of a first preferred embodiment of a reagent dispensing system generally represented as reference numeral 30. The dispensing system 30 comprises a plurality of reagent fluid reservoirs 200, a plurality of filters 300, a plurality of reagent jetting heads 400, a plurality of jetting head control units 500, an interface unit 600, a computer 700, transportation unit 902, a plurality of fluid mixing cells 904 and a detection station 906.

The reservoir 200 holds a selected quantity of reagent fluid for dispensing. The reservoir 200 is maintained at atmospheric pressure by suitable means such as an atmospheric vent. The reagent fluid is transferred from the reservoir 200 through the filter 300 to the reagent jetting head 400. The filter 300 is placed between the reservoir 200 and the jetting head 400 to ensure that any particular foreign matter in the reagent fluid is trapped before entering the jetting head 400.

The plurality of jetting heads 400 and the detection station 906 define a processing path. Each jetting head 400, which is described in detail below, ejects uniformly sized droplets 2 of reagent fluid. The droplets 2 are propelled, with controlled velocity and direction, towards a selecting mixing cell 904 positioned along

the processing path by the transportation unit 902. The mixing cells 904 are comprised of non-reactive material and function as minute holding tanks for the dispensed reagent fluid.

The plurality of jetting heads 400, shown in Fig. 1, are positioned sequentially along the processing path. Alternately, some or all of the plurality of jetting heads 400 may be positioned with respect to the transportation unit 902 such that the heads 400 direct the droplets 2 into a selected mixing cell 902 simultaneously.

The jetting heads 400 and the transportation unit 902 are controlled by the computer 700. The computer 700 issues commands to an interface unit 600 which is electrically connected to the transportation unit 902 and to the jetting head control unit 500. The interface unit 600 is of conventional design and is used to control the transfer of information between the computer 700 and the jetting control unit 500. The interface unit 600 is also used to control the transfer of information between the computer 700 and the transportation unit 902.

A first embodiment of the reagent jetting head is shown in Figs. 2a - 2e and generally represented by numeral 400. The jetting head 400 comprises a two piece symmetrical housing 402, 404. The housing 402, 404, when assembled, is adapted to form an orifice aperture 406, an air vent and reagent supply channel 410 and a transducer chamber 403, shown in Fig. 4b. Four screws 408, adapted to respective housing screw apertures 416, hold the housing 402, 404 in an assembled configuration.

The jetting head 400 further comprises a jetting tube 432, a piezo-electric transducer 434 and a reagent fluid supply tube 430. The jetting tube 432 defines a tapered orifice 433 at one end and a fluid receiving aperture 431 at the other end for expelling and receiving fluid, respectively. The piezo-electric transducer 434 is cylindrically shaped and secured concentrically about the mid-region of the jetting tube 432 with epoxy or other suitable means.

The piezo-electric transducer 434, shown in Fig. 2e, defines a first and second end and comprises a section of cylindrically shaped piezo-electric material 435. An inner nickel electrode 437 covers the inner surface of the cylinder 435. The electrode 437 wraps around the first end of the cylinder 435 a sufficient distance to enable electrical connection external to the cylinder 435.

A second nickel electrode 436 covers the majority of the outer surface of the cylinder 435. The second electrode is electrically isolated from the first electrode 437 by an air gap at the face of the second end of the cylinder 435 and by an air gap on the outer surface of the cylinder 435 near the first end. When an electrical pulse is applied to the first and second electrodes 437, 436 a voltage potential is developed radially across the transducer material 435. The voltage potential causes the radial dimensions of the transducer 435 to change, which causes the volume defined by the transducer 434 to also change.

The jetting tube 432 is positioned in the transducer chamber 403 such that the receiving end 431 extends beyond the rearward end of the transducer 434. The receiving end 431 of the jetting tube 432 is inserted into one end of a reagent supply tube 430. The supply tube 430 is sealingly held to the jetting tube 432 by concentric teeth 412 formed by the housing sections 402, 404. The teeth 412 not only seal the supply tube 430 to the jetting tube 432, but, also, seal the supply tube 430 to the housing 402, 404.

The second end of the supply tube 430 passes through the channel 410 and into a reagent reservoir 200. The reservoir 200 contains the reagent fluid to be dispensed by the jetting head 400. As the reagent fluid is dispensed, air is supplied to the reservoir 200 through the channel 410 to prevent the creation of a vacuum in the reservoir 200. The reservoir 200 is releasably attached to the housing 402, 404 and held in place by frictional forces. A reservoir cap 202 is flexibly attached to the reservoir 200 and adapted such that the cap 202 may be used to secure the opening in the reservoir 200 when the reservoir 200 is disengaged from the housing 402, 404.

The position of the jetting tube 432 defines the horizontal plane of the jetting head 400. The jetting tube 432 and the transducer 434 are held in a pre-defined vertical relationship with respect to the housing 402, 404 by means of two upper vertical alignment pins 418 and two lower vertical alignment pins 418. The two upper vertical alignment pins 418 extend horizontally from the housing section 402 into the transducer chamber 403. Similarly, the two lower vertical alignment pins 418 extend horizontally from the housing section 404 into the transducer chamber 403. Each vertical alignment pin 418 is formed integrally with the respective housing sections 402, 404.

The jetting tube 432 and the transducer 434 are held in a predefined horizontal relationship with respect to the housing 402, 404 by means of four horizontal alignment pins 424. Two of the horizontal alignment pins 424 extend horizontally from the housing section 402 approximately midway into the transducer chamber 403. Similarly, two of the horizontal alignment pins 424 extend horizontally from the housing section 404 approximately midway into the transducing chamber 403. Each horizontal alignment pin 424 is formed integrally with the respective housing section 402, 404. The alignment pins 418, 424, sealing teeth 412 and orifice aperture 406 are aligned and adapted to hold the jetting tube 432 and transducer 434 such

that the orifice 433 of the jetting tube 432 extends into the orifice aperture 406.

An electrical transducer activation pulse is supplied to the piezo-electric transducer 434 from the jetting head control unit 500 by means of two contact pins 422. A quantity of fluid will be dispensed from the jetting tube for each applied activation pulse. The activation pulse can be produced by a variety of conventional circuits or commercially available units. Therefore a detailed description of such a circuit will not be provided. However, a circuit for producing a series of activation pulses is provided in the description of the printing embodiment below. Due to the differing constraints involved in dispensing and printing, the circuit in the printing embodiment is not required to produce only a single pulse. However, one skilled in the art could, if desired, modify the circuit to produce a single pulse on demand for use in the dispensing embodiment.

Each contact pin 422 defines an enlarged head 423 which is adapted to contact the respective first and second electrodes 437, 436 located on the outer surface of the transducer 434. Two contact pin holders 414, integral with the housing 402, 404, are positioned to hold the respective contact pins 422 under the pin heads 423 such that each pin head 423 electrically engages the appropriate electrode 437, 436 of the transducer 434. Two contact pin engaging posts 420 extend from the housing 402, 404 opposite the contact pin holders 414 to engage and hold the contact pins 422 against the contact pin holders 414. The ends of the contact pins 422 opposite the pin heads 423 extend through the housing 402, 404 by means of contact pin apertures 421. Since the housing sections 402, 404 are formed symmetrically to one another, the contact pins 422 may be optionally attached above the transducer 434.

In operation, the reservoir 200 containing reagent fluid is fastened to the jetting head 400 such that the fluid supply tube 430 extends into the reagent fluid. The filter 300 may be fitted to the free end of the supply tube 430 or positioned inside the reservoir 200. Air is supplied through the channel 410 around the supply tube 430 to prevent the reservoir 200 from falling below atmospheric pressure. The air is prevented from entering around the supply tube 430 and into the transducer chamber 403 by the seal created between the sealing teeth 412 and the supply tube 430. The jetting tube 432 may be primed by slightly pressurizing the reservoir 200 to cause the reagent fluid to travel through the supply tube 430 and into the jetting tube 432. Once primed, the fluid is prevented from substantially withdrawing from the jetting tube 432 by the surface tension of the reagent fluid at the orifice 433.

The transducer activation pulse is conducted to the contact pins 422 of the jetting head 400. The contact pins 422 communicate the high voltage pulse to the electrodes 437, 436 of the transducer 434 with polarity such that the concentrically mounted transducer 434 expands. The rate of expansion is controlled by the rise time of the high voltage pulse which is preset to generate a rapid expansion. The expansion of the transducer 434 causes the jetting tube 432, which is epoxied to the transducer 434, to also expand. The expansion of the tube 432 generates an acoustic expansion wave interior to the tube 432 which travels axially towards the orifice 433 and towards the fluid receiving aperture 431. When the expansion wave reaches the orifice 433, the reagent fluid is partially drawn inwardly. However, the surface tension of the fluid acts to inhibit substantial inward fluid movement.

When the expansion wave reaches the end 431 of the tube 432, the expansion wave is reflected and becomes a compression wave which travels towards the center of the piezo-electric tube 434. The high voltage pulse width is adapted such that when the reflected compression wave is beneath the piezo-electric tube 434, the high voltage pulse falls, resulting in a de-expansion of the transducer 434 and the jetting tube 432. This action adds to the existing acoustic compression wave in the interior of the jetting tube 432. The enhanced compression wave travels toward the orifice causing reagent fluid to be dispensed from the tube 432. The fluid is propelled from the orifice 433 as a small droplet 2 and deposited in the selected mixing cell 904 positioned by the transportation unit 902. One droplet 2 is dispensed for each transducer activation pulse. This mode of dispensing is referred to as the drop on demand mode.

In some instances, the droplet 2 may be accompanied by at least one smaller satellite droplet. However, even if satellite droplets are present, the volume and velocity of the reagent droplets 2 are highly reproducible. This reproducibility allows for precise dispensing of uniform, controllably sized droplets 2 of reagent fluid into the mixing cell 904.

The droplets 2 of reagents impact the mixing cell 904 with sufficient force and volume to cause fluidic mixing of the reagents. Once the desired amounts of the selected reagents are deposited in the selected mixing cell 904, mixing cell 904 is transported to the detection station 906 where the mixed reagents may be extracted for use or analyzed for assay results.

The dispensing system 30 provides numerous advantages based upon the ability of the reagent jetting head 400 to rapidly and reproducibly eject uniform quantities of a wide range of reagents. The reaction times of some chemical processes are dependent upon the volume of the reagents used. The ability of the dispensing system 30 to dispense such minute amounts of reagents thereby reduces the processing time

of certain chemical assays. Furthermore, some chemical assays require a wide range of dilution ratios. Many conventional dispensing systems are unable to dispense the reagents in volume small enough to make the desired assay practical. The dispensing system of the present invention overcomes this disadvantage.

- 5 In addition to dispensing reagent fluids, certain embodiments may be used for precision printing of reagents onto a printing medium such as filter paper to produce an assay test strip. A printing system 10 using the present invention is represented in Fig. 3. Structure similar in form and function to structure described above will be designated by like reference numerals. The printing system 10 comprises a reagent fluid reservoir 200, a filter 300, a reagent jetting head 400, a jetting head control unit 500, an
10 interface 600, a computer 700, and an x-y plotter 800.

- The x-y plotter 800 is a commercially available pen plotter, mechanically modified in a conventional manner such that the pen is replaced with the jetting head 400. The general operation and structure of the plotter 800 will not be described in detail. The plotter 800 accepts commands from the computer 700 thru a standard RS-232 serial interface contained within the interface unit 600. The plotter 800 processes the
15 commands and produces control signals to drive an x-axis motor (not shown) and a y-axis motor (not shown). The x-axis motor is used to position the jetting head 400 and the y-axis motor is used to position a drum (not shown) to which the printing target 1 is attached.

The plotter 800 produces a pen down signal PENDN. This signal is applied to the control unit 500 and indicates that the plotter 800 is ready to begin a printing operation.

- 20 The control unit 500 also receives control signals from the interface unit 600. These signals include signals HIGHER, LOWER to control the magnitude of the pulse applied to the transducer 434; a reset signal RST to reset the control unit 500; and a series of print signals PRT. The generation of these signals will not be described in detail since their production is performed by the conventional interface unit 600.

- The jetting head 400 and fluid supply system 200, 300 are initialized and operate substantially as
25 described above. The jetting head control unit 500, shown in Figs. 5a - 5e comprises a print control circuit 510, a pulse generator 530, a high voltage supply 540, and a strobe pulse generator 560. The control unit 500 also comprises a power supply. However, since the power supply is of conventional design it will not be shown or described in detail.

- The print control circuit 510 receives the pen down signal PENDN from the plotter 800 and comprises a
30 transistor Q100, a one-shot circuit U100, two NAND-gates U101, U102, a line decoder multiplexer U107 and four inverters U103-U106. The pen down signal PENDN is applied to the base of the transistor Q100 by resistors R100, R101 and diode D100. The emitter of transistor Q100 is tied to ground and the collector is connected to the +5 volt supply by resistor R102.

- The one-shot U100 comprises inputs A, B and an output Q. The B input of the one-shot U100 is
35 connected to the collector of the transistor Q100 and the A input is tied to ground. The time period of the pulse produced by the one-shot U100 is determined by a resistor R104, a variable resistor R105 and a capacitor C100. The output Q of the one-shot U100 is combined with the collector output of the transistor Q100 by the NAND-gate U101 and then inverted by the NAND-gate U102. The circuit is operative to produce an adjustable delay in the application of the pen down signal PENDN to the control unit 500.

- 40 The line decoder U107 is circuited to function as a 3 input AND-gate. The output of the NAND-gate U102 is applied to the first input of the decoder U107; the print signal line PRT comprising a series of pulses from the interface unit 600 is applied to the second input; and a jetting head ON/OFF signal from switch S1 is applied to the third input. The inverter U106 inverts the output of the line decoder U107 to generate the print control signal PRT and the inverters U103-U105 invert the control signals LOWER,
45 HIGHER, and RST signals, respectively.

- The high voltage supply 540, shown in Fig. 5b, provides +175 volts DC to produce a maximum pulse of +150 volts peak to peak at the reagent jetting head 400. The high voltage supply 540 comprises differential amplifier U12 and transistors Q1, Q2, Q13, Q14. A stable reference voltage of -2.5 volts DC is
50 produced at the junction of a reservoir R13, connected to the -15 volt supply, and a diode CR6, connected to ground. The reference voltage is combined with a resistor R14 to produce an adjustable, stable voltage reference for the amplifier U12. The reference voltage is applied to the inverting input of the amplifier U12 through a resistor R11. The noninverting input of the amplifier U12 is connected to ground by a resistor R12. The amplifier U12, in combination with a feedback resistor R10, produces an output signal proportional to the difference of the voltage reference signal and the ground potential.

- 55 The output of the amplifier U12 is applied to the base of the transistor Q2 whose collector is connected to the +15 volt supply. The signal produced at the emitter of the transistor Q2 is applied to the base of the transistor Q1 through resistors R8, R6, R5, a transformer L1 and diodes CR4, CR2, CR1. The emitter of the transistor Q1 is connected to ground and the collector is connected to the +15 voltage supply through the

transformer L1. A diode CR3 connects the collector of the transistor Q1 to the junction of the resistor R5 and the diode CR4. The transistor Q1 is biased for proper operation by resistors R7, R6, R5. The resistor R7 and a capacitor C22 connect the junction of the resistor R8, R6 to the +15 voltage supply.

The transistor Q1 and the transformer L1 form a "flyback" blocking oscillator. Any increase in current supplied by the transistor Q1 produces an increase in energy transferred through the secondary winding of the transformer L1 and diode CR5. Therefore, an increase in current supplied by the transistor Q1 results in an increase in power available to the high voltage output. The diodes CR1-CR4 form a "Baker clamp" which prevents transistor Q1 from saturating. The clamp thereby avoids transistor storage time.

The diode CR5 is connected to a multiple pi filter formed by the inductors L3, L2, capacitors C24, C21, C41 and resistors R29. The multiple pi filter attenuates ripple and switching spikes in the signal supplied to the transistor Q13 which produces the high voltage output $V + +$. A resistor R64 connects the base of the transistor Q13 to the emitter and to the resistor U29. The base is also connected to the collector of the transistor Q14 by a resistor R65. The base of the transistor Q14 is connected to the +15 volt supply by a resistor R67 and to ground by a resistor R66. The emitter of the transistor Q13 provides a signal HV SENSE which is fed back to the inverting input of the amplifier U12 through a resistor R9. The high voltage output $V + +$ is produced at the collector of the transistor Q13. The proper biasing of the transistor Q13 is provided by resistor R64 and the biasing circuit comprising the transistor Q14, resistors R67, R66, R65.

The pulse generator 530, shown in Figs. 5d, 5e, comprises an opto-isolator U18, a one-shot U23, a digital to analog (D/A) converter U30 and two binary counters U24, U25. The pulse generator 530 accepts control signals PRT, LOWER, HIGHER, RST and produces the activation pulse which is applied to the transducer 434. In normal operation, the PRT control signal is supplied to the opto-isolator U18 by a jumper JMP between contact points E5, E6. The opto-isolator U18 is of conventional design and comprises a light emitting diode (LED) circuit and a photo-element circuit. A resistor R15 operates as the load resistor for the LED circuit of the isolator and a capacitor C25 suppresses transient noise on the voltage supply to the isolator U18. The output of the isolator U18 is applied to one input of the one-shot U23 whose time constant is adjustably determined by resistors R38, R25 and a capacitor C30. The pulse from the non-inverting output of the one-shot U23 is fed to the base of a transistor Q9. A resistor R39 sets the approximate base current of the transistor Q9 which is used as a level shifter for converting the CMOS signal level to the +15 volt DC signal level.

The control of the rise and fall rates of the pulse generator 530 is accomplished by directing a pair of current source transistors Q11, Q12 to charge and discharge a capacitor C57. The transistor Q11 is operative as a source of current and the transistor Q12 is operative as a sink for current. A transistor Q10 controls the level of the current by applying an appropriate bias current through a resistor R56 to the base of the transistor Q11. The biasing of the transistors Q11, Q12 is critical to the proper rise and fall rates. Therefore precision voltage references CR13, CR15 are used to provide respective bias reference voltages. A temperature compensation network is formed from zener diodes CR14, CR16 and resistors R55, R54 to maintain stable operation of the transistors Q11, Q12, respectively. The variable resistors R49, R52 may be used to adjust the fall time and rise time, respectively, of the output pulse applied to the reagent jetting head 400. A plurality of resistors R46, R47, R48, R49, R51, R52, R53, R56, R57, R58 are used to properly bias the transistor Q10, Q11, Q12 and capacitors C55, C60 are circuited to maintain stability of the circuit.

The impedance of the output stage of the rise and fall circuitry Q10, Q11, Q12 is very high. With such a high impedance, circuit elements attached to the capacitor C57 could affect the linearity of the rise and fall time constants. Therefore, an FET input operational amplifier U32 is used as an impedance interface. The amplifier U32 is configured in the noninverting mode and circuited with capacitors C58, C59 for stability.

The output of the amplifier U32 is applied to an inverting amplifier U31 by means of a resistor R62. The amplifier U31 inverts and conditions the pulse control signal with the aid of resistors R59, R60. Resistors R61, R63, connected to the -15 voltage supply, provide a means for adjusting the DC level offset of the amplifier U31 output signal. Capacitors C51, C52 are connected to enhance the performance and stability of the circuit.

The output of the amplifier U31 is applied by means of a resistor R41 to the positive voltage reference signal input REF(+) of the D/A converter U30. The negative voltage reference signal input REF(-) is tied to ground by a resistor R40. The D/A converter U30 produces output signals IOUT, IOUT* which are proportional to the difference between the positive and negative voltage reference signal inputs REF(+), REF(-). Capacitors C48, C49, C50 are connected to the D/A converter U30 to enhance stability.

The D/A converter outputs IOUT, IOUT* are also proportional to an 8-bit binary value applied to inputs B1-B8. The binary value is supplied by the counters U24, U25 which are controlled by the function signals LOWER, HIGHER and RST. The LOWER signal and the HIGHER signals are applied to the count up and

count down inputs CU, CD of the counter U24 by means of opto-isolators U19, U20. The carry and borrow outputs CY, BR of the counter U24 are connected with the count up and count down inputs CU, CD of the counter U25. The reset inputs RST of both counters U24, U25 receive the RST signal by means of an opto-isolator U21. Resistors R16, R17, R18 are used as load resistors for the LED circuits of the isolators U19, U20, U21 and capacitors C26, C27, C28 are used to enhance the stability of the isolator circuits.

The counters U24, U25 may optionally be preloaded to the selected 8-bit binary value through input lines TP0-TP7. The input lines TP0-TP7 are normally biased to the logical high signal state by resistive network U22. The selected binary value is loaded into the counters U24, U25 by pulling the respective inputs TP0-TP7 low and applying an external, active low, load signal EXT LOAD to pin TP8. The load signal pin TP8 is connected to the load inputs LOAD of the counters U24, U25 and conditioned by a clipping circuit comprised of diodes CR9, CR10 and a pull-up resistor of the resistor network U22.

The noninverted and the inverted outputs IOUT, IOUT* are connected to the inverting and noninverting inputs of a differential amplifier U29. The output of the amplifier U29 is fed back to the inverting input by a resistor R50. The amplifier U29 converts the current output of the D/A converter U30 to a voltage output. Capacitors C56, C47 are provided to enhance circuit stability.

The output of the amplifier U29 is applied to the noninverting input of the amplifier U28. The output of the amplifier U28 is fed back to the inverting input by means of a capacitor C46 and a resistor R37. The inverting input is also connected to ground by a resistor R36. To enhance the frequency response of the amplifier U28, a resistor R43 and a capacitor C54 are connected between the frequency compensation input FC and ground. An adjustable DC offset is provided by connecting the output offset inputs OF, OF with a variable resistor R42. The wiper of the resistor R42 is connected to the high voltage power supply output V_{+} .

The output of the amplifier U28 is also connected to the base of a transistor Q4 and through diodes CR11, CR12 to the base of a transistor Q7. The transistor Q4, Q7, Q3 and resistors R30-R35 form an output circuit capable of driving high capacitive loads at high slew rates and wide bandwidth. The variable resistor R31 may be used to set the maximum current through the bias network R30, R33 by measuring the voltage drop across resistor R35.

The strobe generator 560 produces a strobe pulse and comprises transistors Q101-Q105 and a one-shot circuit U108. The strobe intensity is determined by the circuit comprising the transistors Q101-Q104 and resistors R109-R115. The circuit is connected to the anode of the LED 900 and receives two inputs from the interface unit 600 to produce four levels of light intensity in the LED 900.

The activation and duration of activation of the LED 900 is determined by the one-shot U108 and the transistor Q105. The one-shot U108 comprises inputs A, B and an output Q. The strobe signal STROBE is applied to the B input from the interface unit 600. The duration of the one-shot U108 output pulse is controlled by the adjustable RC network R107, R108. The output Q is applied to the base of the transistor Q105 by resistor R108. The collector of the transistor Q105 is connected to the cathode of the LED 900 to draw current through the LED 900.

The computer 700, control unit 500 and plotter 800 must be initialized. The initialization of the computer 700 and the plotter 800 will not be discussed since these units are of conventional design and operation.

To initialize the jetting head control unit 500, the computer 700 directs the interface unit 600 to issue a reset command. The reset signal RST is conducted to the control unit 500 whereupon the counters U24, U25 are cleared. The computer 700 then retrieves from its memory, or by conventional operator input, the desired digital setting for the D/A converter. This setting may also be calculated from data and may be tailored to specific sizes of jetting heads 400 or reagent fluids. The computer 700 then issues a series of commands, through the interface unit 600, to increment or decrement the counters U24, U25 to correspond to the desired binary setting. If the command directs that the counters are to be raised, then the HIGHER* signal is applied through the opto-isolator U20 to the count up CU input of the counter U24. Similarly, if the command directs that the counters are to be lowered then the LOWER* signal is applied through the opto-isolator U19 to the count down CD input of the counter U24. Since the carry and borrow outputs CY, BR of the counter U24 are connected to the count up and count down inputs CU, CD, respectively, of the counter U25, the digital setting applied to the D/A converter U30 may range from 0 to 255. Alternately, the counters U24, U25 could be initialized to a desired setting by loading the binary value on the lines TP0-TP7 and strobing the EXT LOAD line.

Once the control unit 500 and the plotter 800 are initialized, the printing cycle may begin. The computer 700 issues a command to the interface unit 600 to produce the series of PRT* signal pulses. The computer 700 then commands the plotter 800 to print, for example, a line along a selected path. The plotter 800 positions the jetting head 400 and target 1 and issues the pen down signal PENDN. The signal is delayed by the print control circuit 510 to ensure that the target 1 is properly positioned. At the expiration of the

delay, the signal is ANDed with the closed-enable switch S1 and the series of print pulses PRT. The result of the AND operation is the application of the PRT pulses to the pulse generator circuit 530.

The PRT signal is applied through the jumper JMP to the opto-isolator U18 and then to the one-shot U23. The one-shot U23 produces a pulse signal which is then converted from CMOS signal levels to the 15 volt DC signal level by the transistor Q9. The rise and fall circuitry comprising Q10, Q11, Q12 converts the square wave pulse into a pulse having the rise and fall characteristics preset by the resistors R49, R52. The conditioned pulse is then amplified by the amplifier U32 and applied to the amplifier U31.

The amplifier U31 converts the polarity of the conditioned pulse to that acceptable by the D/A converter U30 and supplies an adjustable DC offset. The DC offset is used to counteract possible distortion attributable to the amplifier U31. The distortion arises in that, for the amplifier U31 to be adequately responsive, a small degree of current must flow through the resistor R41. This current creates an offset condition at the output of the amplifier U29 which is then scaled by the D/A converter U30 in correspondence with the binary data. The resistor R63 allows a small amount of current to be applied to the amplifier U31 to control the offset voltage attributable to the current flowing through the resistor R41.

The D/A converter U30 scales the difference between the inputs REF(+), REF(-) using the binary data supplied to input lines B1-B8 to produce a current output pulse IOUT and a current inverted output pulse IOUT. The two outputs IOUT, IOUT are fed to the amplifier U29 which convert the current outputs into a single voltage output. The scaled, conditioned pulse is then applied to the output circuit comprising the amplifier U28 and the transistors Q3, Q4, Q5, Q6, Q7. The circuit produces a high voltage pulse with the aforementioned rise and fall characteristics to drive the piezo-electric transducer 434.

The high voltage pulse is applied to the transducer 434 and causes a droplet 2 of fluid to be propelled onto the target 1. Since the pen down signal PENDN is still applied, additional droplets 2 are produced from the jetting head 400. The plotter 800 moves the jetting head 400 and target 1 along the desired path during the emission of the droplets 2 to produce the desired printed line. When the printing is complete, the plotter 800 removes the pen down signal PENDN and the droplet emission stops. Of course it should be understood that dots, circles and the like could be produced by appropriate positioning of the target 1 and jetting head 400.

The size and uniformity of the droplets 2, as well as the presence of any satellite droplets, may be observed with the aid of the scope 950 and the LED 900. The scope 950 and the LED 900 are positioned such that the droplets 2 pass between the scope 950 and the LED 900 and within the focal range of the scope 950. The strobe pulse when applied to the LED 900 causes the LED 900 to momentarily flash. The timing of the activation and the width of the pulse may be adjusted such that the flash occurs when the fluid, expelled in response to the high voltage pulse, is between the scope 950 and the LED 900. The dispensed quantity of fluid may then be observed in flight or at or near the moment of separation from the orifice 433. Corrections based on the observation may then be made to the system 10.

Since each droplet 2 is small in volume, the droplet 2 may be rapidly absorbed by the target 1, thereby allowing rapid and precise placement of a variety of reagents on the target 1 with reduced drying time and reduced potential of fluidity mixing. In addition, the ability to place small droplets 2 in a precise manner enables the target 1 to be printed in a high density matrix with a variety of reagents as isolated matrix elements.

In some printing applications, particularly when printing fluids of flow viscosity and surface tension, it may be desirable to force the fluid through the jetting tube 432 under pressure and allow the vibrations produced by the transducer 434 to break the emitted fluid stream into precise droplets 2. Under this mode of printing, the emission of droplets 2 can not be stopped by cessation of the transducers activation pulse. It is therefore necessary to prevent fluid emission by other means. One preferred means of momentarily stopping emission of the droplets is shown schematically in Fig. 4. In this arrangement, structure similar to structure represented in Fig. 3 in form and function, is represented by like reference numerals.

The arrangement, generally represented by the numeral 20, includes a closed reagent recirculation system comprising a normally close three way valve 970, a sump 960 and a recirculation pump 980. In the continuous mode, the reagent fluid is forced out the orifice 433 by hydraulic pressure and broken into a series of substantially uniform droplets 2 by movement of the transducer 434. A regulated, filtered air supply 100 is used to pressurize the reagent fluid reservoir 200. The reagent fluid within the reservoir 200 may optionally be agitated by a magnetic stirrer unit 990. This is especially useful for reagent fluids comprising suspended particles.

The three-way valve 970 comprises a common channel, a normally open channel and a normally closed channel. The fluid is forced through the filter 300 and applied to the normally closed channel of the valve 970. When the normally closed channel is closed, the normally open channel of the valve 970 functions as a vent for the reagent jetting head 400. The common channel is connected to the reagent supply tube 430

of the jetting head 400. The reagent supply tube 430' is also connected to the sump 960.

In operation, the normally closed channel is opened by an appropriate signal supplied by the computer 700 which also closes the normally open channel. When the normally closed channel is opened, fluid is permitted to pass to the sump 960 and to the jetting head 400. The sump 960 collects the reagent fluid not transferred to the jetting head 400. The sump 960 supplies the collected fluid to the inlet side of the recirculating pump 980 which returns the fluid to the reservoir 200. The returned fluid is then mixed with the contents of the reservoir 200 and is available for recirculation.

When operating in the continuous mode, rather than interrupt the continuous stream of print pulses to the jetting head 400, the printing may be momentarily stopped by closing the normally closed channel of the valve 970. The closing of the normally closed channel stops the flow of reagent fluid to the jetting head 400 and allows the jetting head 400 to vent to atmospheric pressure. With the fluid supply blocked, the transducer 434 is unable to expel further droplets 2. Thus, if positioning of the target 1 by the plotter 800 requires a longer time interval than the time between droplet 2 emission, the computer 700 may close the normally closed channel of the valve 970. The plotter 800 may then position the target 1 or position a new target 1 as desired.

When printing, the active ingredient of the reagent is tailored to achieve a desired concentration per unit area on the target 1. However, to a certain extent the final concentration per unit area can be adjusted by varying the density of the droplets 2 printed on the target 1. The preferred embodiment is particularly well suited to this application due to its ability to print precise, discrete pels of reagent.

A second preferred embodiment of the jetting head is illustrated in Figs. 6a-6b and is generally represented as 400'. The jetting head 400' comprises housing formed into three sections 401', 402', 403'. The housing section 403' comprises a recessed region which forms the reagent fluid reservoir 200' when the housing section 403' is positioned against housing section 402'.

The jetting head 400' further comprises a piezo-electric transducer 434' and a reagent jetting tube 432' similar to those of the first embodiment. The jetting head 400' and the transducer 434' are most clearly shown in Fig. 6b. The jetting tube 432' defines an orifice 433' at one end and a reagent fluid receiving aperture 431' at the other end. The transducer 434' is mounted to the jetting tube 432' concentrically about the mid-region of the tube 432' with epoxy.

The transducer 434' and the jetting tube 432' are positioned in channels 420', 418', 416' located in the housing sections 402', 401'. The channel 416' comprises a plurality of sealing teeth 412' operative to engage and seal against the fluid receiving end 431' of the jetting tube 432'. The channel 416' is connected to the reagent fluid supply channel 430'. The supply channel 430' is connected with the fluid reservoir 200' by means of an aperture 431' through the housing section 402', shown in Fig. 6b.

The reservoir 200' comprises a flexible reservoir lining 201' adapted to contain the reagent fluid. The lining 201' comprises one aperture which is connected to the housing 402' to allow the fluid to pass from the lining 201'. A vent (not shown), located in the housing 403', allows the space between the reservoir 200' and the lining 201' to be vented or pressurized. A filter 300' is positioned within the aperture 202' to trap unwanted particulate foreign matter.

Electrical pulses are supplied to the transducer 434' by means of two contact pins 422'. The pins 422' are inserted through respective apertures 419' of the housing section 402' and respective apertures 421' of the housing section 403'. Two thin electrically conductive strips 410', 411', shown in Fig. 6b, are used to connect the transducer 434' with the contact pins 422'. A protective shield 405' extends from the housing position 403' to partially isolate the protruding portions of the contact pins 422'.

The function and operation of the jetting head 400' is similar to that of the jetting head 400 and therefore will not be discussed in detail. The collapsible inner lining 201' of the reservoir 200 allows the jetting tube 432' to be primed by pressurizing the reservoir 200' through the vent 205'. Once primed, the jetting head 400' may be used as described above in reference to the jetting head 400.

The jetting head 400' provides an advantage in that the entire fluidic system is contained in one housing. Such containment allows for fast and efficient replacement of the jetting heads without fluid contamination problems.

A third preferred embodiment of the jetting head is shown in Fig. 7 and generally represented as 400". The jetting head 400" comprises a housing 403", a reagent fluid supply tube 406", a piezo-electric transducer 434" and an orifice plate 404". The housing 403" defines a conically shaped fluid chamber 432". An orifice plate 404", defining an orifice 433", is fastened to the housing 403" such that the orifice 433" is located at or near the apex of the conical fluid chamber 432".

The fluid feed tube 406" is attached to the housing 403" and defines a supply channel 430". The supply channel 430" is in fluid communication with the fluid chamber 432" by means of a connecting channel 431". The base of the fluid chamber 432" is formed by the disc-shaped transducer 434". The transducer 434" is

held in position by a hold down plate 402 attached to the housing 403. The electrical connections to the transducer 434 are of conventional design and are therefore not shown. The housing 403 further comprises a threaded aperture 406 for mounting the jetting head 400.

6 The jetting head 400 operates in a manner similar to the jetting heads described above. However, in this jetting head the transducer 434 is normally disk shaped. When the electrical pulse is applied, the transducer 434 bends slightly, thereby altering the volume of the conically shaped jetting chamber 432. The change in volume of the chamber 432 causes the expulsion of fluid through the orifice 433 and the intake of fluid through the supply channel 430 as described in reference to the jetting head 400.

10 A fourth preferred embodiment of the jetting head is shown in Fig. 8 and is generally represented as 400'. The jetting head 400' is very similar in form and function to the jetting head 400 and will not be described in detail. The jetting head 400' comprises two symmetrical housing sections. The sections may be connected together by means of apertures 409' and screws, not shown. When assembled, the housing sections 404', 402' form a T-shaped supply channel 410'.

15 In operation, the jetting head 400' functions in a manner similar to the jetting head 400. The jetting head 400' is especially suited for use in the continuous mode, but may also be used in the drop on demand mode. In the continuous mode, the fluid is circulated continuously through the supply channel 430' allowing the jetting tube 432' to withdraw as much fluid as required.

20 By way of illustrating and with no limitations intended the following information is given to further illustrate the above described embodiments. The computer 700 is an IBM Corporation Personal Computer with 640 kbytes of RAM memory. The interface unit 600 is a Burr Brown interface unit model number PC 20001. The plotter 800 is manufactured by Houston Instrument as model number DMP-40. Communication between the plotter 800 and the interface unit 600 is performed through a standard asynchronous serial communication port.

25 The electrical pulse applied to the jetting head 400 to activate the transducer 434 comprises a rise time of approximately 5 usecs, a fall time of approximately 5 usecs and a pulse width of approximately 35 usecs. When the transducer 434 is operated in the drop on demand mode, the voltage potential of the pulse is 60 volts plus or minus 10 volts and the pulse frequency can be up to 4 khz. When the transducer 434 is operated in the continuous mode, the voltage potential of the pulse is 30 volts plus or minus 10 volts and the pulse frequency can be up to 10 khz.

30 The jetting tube 432 is manufactured from a pyrex glass tube and measures .027 inches outside diameter and .020 inches inside diameter. The tube is drawn to a closed taper in an electric furnace. The tapered end is then cut and ground to a desired orifice opening of .002 to .004 inches in diameter. The tube is cut to a final length of .945 inches in the case of the dispenser embodiment and ultrasonically cleaned in acetone. After being cleaned and dried the large end of the tube is fire polished. If desired, the orifice end of the tube may receive a coating, such as a hydrophobic polymer, to enhance droplet separation from the tube.

35 The supply tube 430 is formed from .023 inch inside diameter and .38 inch outside diameter polyethylene tubing produced by Intramedic Corp. as model number #14 170 11B. During assembly, one end of the tubing is stretched over a warm tapered mandrel. The stretched end of the supply tube 430 is then inserted over the large fire polished end of the jetting tube 432. The assembly is then cleaned and baked in a circulating air oven at 50°C. for 10 minutes.

40 The transducer 434 was purchased from Vernitron of Cleveland, Ohio as model number PZT-5H. The electrodes 437, 436 are composed of nickel and are separated from each other on the outer surface of the transducer by approximately .030 inches. The jetting tube 432 is inserted into the cylindrical piezo-electric tube 434 and secured with epoxy manufactured by Epoxy Technology of Belenca, Massachusetts as model number 301. The epoxy is applied at the junction of the tube 432 and transducer 434 with a syringe. The epoxy flows along the tube 432 inside the transducer 434 by capillary action. The assembly is then baked in a circulating air oven at 65°C. for one hour to cure the epoxy.

45 The contact pins 422 are secured to one of the housing sections 402, 404 with a drop of epoxy. The transducer jetting tube 434, 432 is placed in the housing such that the orifice end 433 of the tube 432 protrudes approximately .030 inches from the housing 403, 404. A drop of silver epoxy is placed between each contact pin 422 and the transducer 434 to ensure a secure electrical connection. Epoxy is also applied to the junction of the housing 402, 404 and supply tube 430. The other section of the housing 402, 404 is then screwed into place.

50 The periphery of the housing 402, 404 is sealed with a capillary sealer such as cyclohexanone. Epoxy is then added around each contact pin 422 and around the orifice end 433. The assembly is then baked in a circulating air oven at 65°C. for one hour.

55 The filter 300 is formed from a polyester mesh with 30 um pores and positioned in a polypropylene

housing. The air pressure supplied to the reservoir 200 during continuous printing operations is regulated at approximately 10 to 30 psi.

The reagents used have the following characteristics:

Printing (drop on demand mode):

5 Fluid viscosity range: 1 - 30 centipoises

Fluid surface tension: 20 - 70 dyne/cm

Printing (continuous mode):

Fluid viscosity range: up to 50 centipoises

Fluid surface tension: not measured

10 Dispensing (drop on demand mode):

Fluid viscosity range: 2 - 30 centipoises

Fluid surface tension: 20 - 70 dyne/cm

A measure of the performance and selected operating characteristics for a typical jetting head are presented in Figs. 9-11. Fig. 9 is a graph of the mass of a droplet as a function of droplet emission frequency for three fluids. The viscosity of the fluids were 1, 5 and 24 centipoise and the transducer excitation pulse width was 35 microseconds. As shown in Fig. 9, the higher fluid viscosity results in a more stable operating performance of the jetting head. Fig. 10 is a graph of droplet velocity as a function of droplet emission frequency for fluid viscosities of 1, 5 and 24 centipoise. The log of the total fluid weight as a function of the log of the number of droplets emitted is shown in Fig. 11. The fluid used has a viscosity of 2 centipoise, a surface tension of 20 dynes/cm, and a density of .8 grams/cc. The transducer excitation pulse was 80 volts and the excitation frequency was approximately 711 Hz.

Some blood typing reagents and some allergen reagents have very low viscosities and surface tensions. Although in some cases viscosity modifiers, such as glycerol, dextran, glucose, and the like, may be added to increase the viscosity, a few reagents are adversely affected by such modifiers.

25 Developing stable and reproducible demand mode jetting is difficult with very low viscosities. Although droplet emission can be established at some fundamental frequencies, the droplets dispensed may have small satellite droplets which reduce the accuracy for metering and dispensing applications. However, even with the satellite drops, sufficient reagent is adequately delivered for most print applications without a substantial decrease in print quality.

30 Glycerin may be used as a viscosity modifier to improve jetting reliability and to prevent obstruction of the orifice arising from evaporation of the reagent fluid components. Glycerin has been found especially beneficial for those reagents containing particulate material. The evaporation of the fluid component results in a concentration of glycerin located at the orifice. The plug of glycerin substantially prevents further evaporation of the reagent fluid. During the next activation cycle of the transducer, the plug of glycerin is expelled from the orifice.

35 When operating in the dispensing mode the volume of the droplets can be varied to substantially uniformly contain from 100 pico-liters to 1 micro-liter. The droplets can be produced at a rate of approximately 1 khz to 8 khz. When operating in the printing mode the size of the pel made by each droplet measures approximately .001-.012 inches in diameter.

40 A copy of the program used in the computer 700 for a printing operation is attached hereto as Appendix A. The values, manufacturer and manufacturing part number of the circuit components of the jetting control unit 500 are substantially as follows:

45

50

55

0 268 237

5

Ref. Numeral of Component	Description and Value	Manufacturer and Part No.
10 R39, 45-48, 57, 58	RES. 10KOHM, WATT5% C.F.	
R66	RES. 150OHM, WATT5% C.F.	
R3	RES. 15KOHM, WATT5% C.F.	
15 R34	RES. 16KOHM, WATT5% C.F.	
R50	RES. 2.4KOHM, WATT1% C.F.	DALE RLO79242G
R13, 23, 36, 40, 41	RES. 2.4KOHM, WATT5% C.F.	
R56	RES. 20KOHM, WATT5% C.F.	
20 R8	RES. 220OHM, WATT5% C.F.	
R6	RES. 27OHM, WATT5% C.C.	
R7, 12, 25	RES. 2KOHM, WATT5% C.F.	
R67	RES. 3.6KOHM, WATT5% C.F.	
25 R51, 53	RES. 3.9KOHM, WATT5% C.F.	
R29	RES. 300KOHM, WATT5% C.F.	
R61	RES. 30KOHM, WATT1% C.F.	DALE RLO79303G
R15-18, 26-28, 54, 55, 64	RES. 4.7KOHM, WATT5% C.F.	
30 R62	RES. 45.3KOHM, WATT1% C.F.	DALE RN55D4532F
R30, 33	RES. 470OHM, WATT5% C.F.	
R21	RES. 470OHM, WATT5% C.F.	
R19	RES. 47KOHM, WATT5% C.F.	
R35	RES. 510OHM, WATT5% C.F.	
35 R43	RES. 6.2KOHM, WATT5% C.F.	
R60	RES. 7.5KOHM, WATT5% C.F.	
R37	RES. 75KOHM, WATT5% C.F.	
R9	RES. 76KOHM, WATT1% C.F.	DALE RN60D7682F
R11	RES. 820OHM, WATT5% C.F.	
40 U2, 11, 14, 16, 22	RES. DIP NETWORK 47KOHM	CT9 761-1R47K
C21, 41, 45	CAP. AXIAL 1MF@250VDC	MALLORY #TC56
C24	CAP. AXIAL 220MF@250VDC	MALLORY LF2219250C7P3
C10	CAP. AXIAL ALUM ELEC. 4700 0MF@25VDC	MALLORY TCG472U025NIC
45 C1, 2, 3, 55, 60	CAP. RADIAL DIPPED TANT. 10MF@25VDC	KEMET T350E106M025AS
C53	CAP. RADIAL DIPPED TANT. 1MF@35VDC	KEMET T350A105K035AS
50 C36	CAP. RADIAL DIPPED TANT. 47MF@10VDC	KEMET T350H566MC10AS

55

BAD ORIGINAL

0 268 237

05

Ref. Numeral of Component	Description and Value	Manufacturer and Part No.
C54	CAP. RADIAL SILV MICA 100PF300VDC	KAHGAN SD5101J301
C57	CAP. RADIAL SILV MICA 20PF300VDC	KAHGAN SP12200J301
10 C49	CAP. RADIAL SILV. MICA 39PF300VDC	KAHGAN SP12390J301
C39	CAP. RADIAL X7R MLC .015MF@50VDC	KEMET C315C102K1R5CA
15 C6	CAP. RADIAL X7R MLC .022MF@50VDC	KEMET C315C223K5R5CA
C30, 35, 37	CAP. RADIAL Z5U MLC .015MF@50VDC	KEMET C315C153K5R5CA
C4, 7	CAP. RADIAL Z5U MLC .01MF@50VDC	KEMET C315C103K5R5CA
20 C4, 5, 6, 9, 11-19, 22, 23, 25-28	CAP. RADIAL Z5U MLC .22MF@50VDC	KEMET C322C224M5U5CA
C31-34, 37, 42, 43 47, 48, 50-52		
25 C56, 58, 59		
C46	CAP. VARI. 2-12PF.	JOHANSEN #9626
CR7, 8, 9, 10, 11, 12, 17	DIODE SIL.	ITT. FAIRCHILD. 1N4148
30 CR1, 2, 3, 4	DIODE SIL. FAST	GENL. INST. EGP10D
CR5	DIODE SIL. FASTHIVOLT	GENL. INST. UF4007
CR6, 13, 15	DIODE SIL. REF. 2.500VDC	NATL. SEMI-LM3852-2.5
CR14, 16	DIODE SIL. ZENER 3.8V. 25WATT	MOTOROLA 1N4622A
U6, 13, 15, 17	SWITCH 8 POSITION DIP	CTS 206-8
35 Q2, 9, 12	TRANSTOR. COMMON NPN	MOTOROLA 2N2222A
Q8, 10, 11	TRANSTOR. COMMON PNP	MOTOROLA 2N2907A
Q4	TRANSTOR. HIVOLTHIFREQ. NPN	MOTOROLA MPSU10
Q7	TRANSTOR. HIVOLTHIFREQ. PNP	MOTOROLA MPSU60
Q1	TRANSTOR. HIVOLTHIINPN	TI, MOTOROLATIP48
40 Q3, 14	TRANSTOR. HIVOLTNPN2N3439	MOTOROLA 2N3439
Q13	TRANSTOR. HIVOLT PNP	MOTOROLA MJE5731
U5, 27	IC 1-SHOT 74HC221	NATL. SEMI MM74HC221N
U23, 26	IC 1-SHOT 74LS221	NATL. SEMI DM741S221N
U7-10	IC COMPARATOR 74HC688	NATL. SEMI MM74HC688N
45 U30	IC CONVERTER DAC0800	NATL. SEMI DAC0800LCN
U24, 25	IC COUNTER 74HC193	NATL. SEMI MM74HC193N
U28	IC HI SLEW HI VOLT OP AMP	BURR-BROWN 3584JM
U1	IC HYBRID DC/DC CONVERTER	BURR-BROWN MODEL 724
U4	IC OC DRIVER SN7406	NATL. SEMI DM7406N
U3	IC OCTAL LATCH 74HC374	NATL. MM74HC374N
50 U12, 29, 31, 32	IC OP AMP LF256	NATL. SEMI LF256H
U18, 19, 20, 21	IC OPTO ISOLATOR	HEWLETT-PCKRD HCPL2300
R24, 42, 63	POT100KOHM $\frac{1}{2}$ WATT10%	BOURNS 3622-1-104
R38, 49, 52	POT10KOHM $\frac{1}{2}$ WATT10%	BOURNS 3622W-1-103
55 R20	POT25KOHM $\frac{1}{2}$ WATT10%	BOURNS 3622W-1-253
R14, 31	POT2KOHM $\frac{1}{2}$ WATT10%	BOURNS 3622W-1-202

Ref. Numeral of Component	Description and Value	Manufacturer and Part No.
5 VRI	REGULATOR 5VDC	NATL.LM340T-5.0
R10	RES.1MEG OHM $\frac{1}{4}$ WATT5% C.F.	
R2,4	RES.1.2K OHM $\frac{1}{4}$ WATT5% C.F.	
R32	RES.1.6K OHM $\frac{1}{4}$ WATT5% C.F.	
R44	RES.1.8K OHM $\frac{1}{4}$ WATT5% C.F.	
R1	RES.10MEG OHM $\frac{1}{4}$ WATT5% C.F.	
10 R5,R22	RES.100 OHM $\frac{1}{4}$ WATT5% C.F.	
R65	RES.100K OHM $\frac{1}{4}$ WATT5% C.F.	
R59	RES.10K OHM $\frac{1}{4}$ WATT1% C.F.	DALE RN55D1002F
R100	RES.270 OHM	
R101,108	RES.470 OHM	
15 R102,103	RES.1K OHM	
106,109,110		
R104	RES.4700 OHM	
R105	PCT.100K OHM	
R107	POT.10K OHM	
20 R111,113	RES.220 OHM	
R112	RES.22 OHM	
R114,115	RES. 47 OHM	
C100	CAP.10MF035 VFC	
C108	CAP.10000 PF	
25 D100	DIODE	1N4148
Q100,105	TRANSTOR	2N2222
Q101,102	TRANSTOR	2N3906
Q103,104	TRANSTOR	2N3904
U100,U108	IC I-SHOT	74LS123
30 U103,104	IC INVERTOR	74LS04
105,106		
U108	IC LINE DECODER	74LS138

Of course, it should be understood that a wide range of changes and modifications can be made to the preferred embodiments described above. For example, the transducer could be of a type other than piezo-electric such as magneto-strictive, electro-strictive, and electro-mechanical. It is therefore intended that the foregoing detailed description be regarded as illustrative rather than limiting, and that it be understood that it is the following claims, including all equivalents, which are intended to define the scope of this invention.

APPENDIX

0 268 237

5 Reagent Jet Printer
Reagent Calibration

PAGE 1
07-14-86
12:24:57

IBM Personal Computer BASIC Compiler V2.00

```

Offset  Data  Source Line
10 0030 0006 REM $TITLE:'Reagent Jet Printer' $SUBTITLE:'Reagent Calibration' $LINESIZE:132
   0030 0006 'MENU - "RECAL"
   0030 0006
   0030 0006 'AUTHOR - M. A. Ensvold
   0030 0006
   0030 0006 'COPYRIGHT (C) 1985 ABBOTT LABORATORIES
15 0030 0006 'REVISION - 2.0 07-01-84 NAE MicroFab modifications
   0030 0006 - 1.0 02-11-84 NAE Creation of initial code
   0030 0006
   0030 0006 'SYSTEM - This code can only be compiled by the BASCOM
   0030 0006 COMPILER, it will not run under the INTERPRETER!!
   0030 0006
20 0030 0006 'DESCRIPTION:
   0030 0006 The reagent calibrate module presents a menu with 12 items arranged
   0030 0006 in 3 columns of 4 rows. The arrow keys allow movement around the
   0030 0006 table, the + and - keys increment or decrement values in the first
   0030 0006 column, and the enter key executes commands in the third column.
   0030 0006 The second column is an array of ASCII strings representing reagent name,
25 0030 0006 concentration, density, and viscosity. The values entered in column one
   0030 0006 are drop frequency, pulse width, stroke delay, and nozzle number.
   0030 0006 The commands in the third column are start/stop, load, save, and exit.
   0030 0006
   0030 0006 'DATA DICTIONARY
   0030 0006
   0030 0006 MENUZ Pointer to which menu item is active (0-11)
30 0030 0006 MENU$(17,1) Array for strings used to display the menu
   0030 0006 MENU$(17,4) Array for numbers in the menu display
   0030 0006 DIFFZ Differential to move MENUZ at arrow key input
   0030 0006 TYPEZ Pointer set during menu scan to direct action
   0030 0006 KEYBUF$ Storage for string input from menu display
   0030 0006 AS Destination for single keystroke inputs
35 0030 0006 FILES String where filename is built for reagent data file
   0030 0006 REAMAP$ String where reagent name is stored
   0030 0006 RZ Row to display special graphics character in menu
   0030 0006 CZ Column to display special graphics character in menu
   0030 0006 SZ Special graphics character is read into here
   0030 0006 DLD.AMP.VALUEZ Integer value for setting pulse amplitude
40 0030 0006 DIG.VALZ Value set to digital port 0 to inc/dec amplitude
   0030 0006
   0030 0006 SUB REAGENT.CALIBRATE STATIC
   0047 0006
   0047 0006 DIM MENU$(17,1),MENU$(17,4)
45 0048 01FE GOSUB INITIALIZE: 'read init. values and set screen
   004E 01FE
   004E 01FE WHILE TYPEZ < 1
   0051 0200 TYPEZ = 0
   0051 0200 AS = ""
50 006A 0204
   006A 0204 WHILE AS = ""
   0079 0204 AS = INKEY$
   0083 0204 IF ACTIVEZ = 1 AND DOWNTIME < TIMER THEN GOSUB PER.DONOR
   00AD 0204 VEND
55 0080 0204

```

5

10

15

20

Reagent Jet Printer
Reagent Calibration

PAGE 2
07-14-86
12:26:57

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
25 00B0	020A	IF AS = CHR\$(13) THEN TYPE1 = 1: 'execute (cr)
00CA	020A	IF AS = "+" THEN TYPE1 = 2: 'increment variable
00E0	020A	IF AS = "-" THEN TYPE1 = 3: 'decrement variable
00F6	020A	IF AS = CHR\$(0) + CHR\$(72) THEN TYPE1 = 4: 'up arrow key
011B	020A	IF AS = CHR\$(0) + CHR\$(80) THEN TYPE1 = 5: 'down arrow key
0140	020A	IF AS = CHR\$(0) + CHR\$(75) THEN TYPE1 = 6: 'left arrow key
30 0165	020A	IF AS = CHR\$(0) + CHR\$(77) THEN TYPE1 = 7: 'right arrow key
018A	020A	IF AS > CHR\$(47) AND AS < CHR\$(123) THEN TYPE1 = 8: 'ascii 0 - z
01C2	020A	ON TYPE1 GOSUB T1, T2, T3, T4, T5, T6, T7, T8
01C2	020A	
01DB	020A	WEND
01DB	020A	TYPE1 = 0
35 01DF	020A	
01E6	020A	EXIT SUB
01EA	020A	REM \$PAGE

40

45

50

55

0 268,237
 1104-00-05

Reagent Jet Printer
 Reagent Calibration

PAGE 3
 07-14-86
 12:21:37

IBM Personal Computer BASIC Compiler V2.00

```

Offset  Data  Source Line
10 01EA 0204 ***** SUBROUTINES FOR THIS MODULE *****
01EA 0204
01EA 0204 T1:      '(cr) execute command
01EF 0204 IF MENU(12,0) = "START" THEN TYPE = 0:RETURN: 'exit to print menu, no action
0205 020C ON MENU(12,0) GOSUB T1A, T1B, T1C, T1D
021A 020C IF MENU(12,0) = "STOP" THEN TYPE = 0
022C 020C RETURN
15 0234 020C T1A:      'start/stop drop flow
0235 020C IF MENU(12,0) = "START" THEN GOSUB START.INX
023A 020C IF MENU(12,0) = "STOP" THEN GOSUB STOP.INX
027F 020C MENU(12,0) = TEMP$
20 029A 0210 COLOR 0,7:GOSUB DISPMENU
02AC 0210 RETURN
02B0 0210
02B0 0210 START.INX:
02B5 0210 TEMP$ = "STOP"
02BF 0210 CALL DOT.ON: 'in module PCI
25 02C3 0210 LOCATE 17,7:COLOR 27,0:PRINT "PRINTING";
02F1 0210 ACTIVE1 = 1
02F8 0210 RETURN
02FC 0210
02FC 0210 STOP.INX:
0301 0210 TEMP$ = "START"
30 030B 0210 CALL DOT.OFF: 'in module PCI
0317 0210 LOCATE 17,7:COLOR 15,0:PRINT " ";
033B 0210 ACTIVE1 = 0
0344 0210 RETURN
0348 0210
0348 0210 T1B:      'load reagent profile
35 0349 0210 IF MENU(6,1) = "" THEN LOCATE 25,1:PRINT "Reagent Name is not specified";GOSUB ANYKEY:RETURN
0391 0210
0391 0210 GOSUB SEARCH
0397 0210
0397 0210 IF IZ < (REANUM(1) + 1) THEN GOTO FOUND
03A8 0214 LOCATE 25,10-LEN(REANUM(6,1))/2:PRINT REANUM(6,1); " not Found";
40 0401 0214 GOSUB ANYKEY: 'wait for a keyhit
0404 0214 RETURN
040E 0214
040E 0214 FOUND:
0413 0214 FILES = RIGHT$(STR$(IZ),LEN(STR$(IZ))-1) + ".REA.R37"
0437 0218 OPEN FILES FOR INPUT AS #1: 'set pattern data file for read
45 0448 0218 INPUT #1,MENU(0,0): 'read frequency
0468 0218 INPUT #1,MENU(1,0): 'read amplitude
048B 0218 INPUT #1,MENU(2,0): 'read stroke delay
04AE 0218 INPUT #1,MENU(3,0): 'read pulse width
04D1 0218 INPUT #1,MENU(4,0): 'read rise time
04F4 0218 INPUT #1,MENU(5,0): 'read fall time
50 0519 0218
0519 0218 INPUT #1,MENU(7,1): 'read concentration
0530 0218 INPUT #1,MENU(8,1): 'read density
0541 0218 INPUT #1,MENU(9,1): 'read viscosity
05B3 0218 INPUT #1,MENU(10,1): 'read surface tension
55 05A9 0218

```

6 Reagent Jet Printer
Reagent Calibration

PAGE 4
07-14-84
12:24:57

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
05A9	0218	CLOSE #1: 'done with data file
10 05B0	0218	OPEN "SEADEP.RJP" FOR OUTPUT AS #1
05C2	0218	PRINT #1,FILES: 'save filenames in default file
05D2	0218	PRINT #1,REMU(6,1): 'save the directory name as well
05F4	0218	CLOSE #1
05F8	0218	GOSUB DISP.PARMS: 'show all parameters
15 0601	0218	RETURN
0605	0218	TIC: 'save reagent profile
0605	0218	IF REMU(6,1) = "" THEN LOCATE 25,1:PRINT "Reagent Name is not specified";GOSUB ANYKEY:RETURN
060A	0218	OPEN "READIR.RJP" FOR INPUT AS #1
064E	0218	INPUT #1,REARUMI
065F	0218	CLOSE #1
20 0671	0218	IF REARUMI < 80 THEN GOTO SAVE.REA
0678	0218	LOCATE 25,1:PRINT "Directory is Full (80 reagents max.)"
0687	0218	GOSUB ANYKEY:RETURN
06A1	0218	SAVE.REA:
06AB	0218	GOSUB SEARCH
25 06B0	0218	IF IX > REARUMI THEN GOTO SAVEREA1
06C7	0218	REARUMI = IX
06CE	0218	COLOR 15,0
06DA	0218	LOCATE 25,1:PRINT REMU(6,1);" already exists. Replace it with new values? ";
070C	0218	AS = ""
0716	0218	WHILE AS = ""
30 0725	0218	AS = INKEY\$
072F	0218	WEND
0732	0218	LOCATE 25,1:PRINT SPACE(17);
074F	0218	IF AS = "Y" OR AS = "y" THEN GOTO REPLACE
0778	0218	RETURN
35 077C	0218	SAVEREA1:
0781	0218	KILL "READIR.OLD": 'delete old backup directory
0788	0218	MAKE "READIR.RJP" AS "READIR.OLD": 'save old directory
0792	0218	OPEN "READIR.OLD" FOR INPUT AS #1
07A3	0218	OPEN "READIR.RJP" FOR OUTPUT AS #2: 'set up new dir
40 07B5	0218	INPUT #1,REARUMI: 'read number of dir entries
07B5	0218	REARUMI = REARUMI + 1: 'increase by 1
07C7	0218	WRITE #2,REARUMI: 'save in new directory
07D9	0218	FOR I=1 TO REARUMI - 1
07E1	0218	LIKE INPUT #1,AS: 'read entry from old dir
45 07FA	021C	PRINT #2,AS: 'write entry in new directory
0807	021C	NEXT I
0817	021C	CLOSE #1
0832	0220	CLOSE #1
0832	0220	CLOSE #1
0839	0220	PRINT #2,REMU(6,1): 'write new entry to new directory
50 0858	0220	CLOSE #2: 'done with directory
0842	0220	REPLACE:
0842	0220	FILES = RIGHT\$(STR\$(REARUMI),LEN(STR\$(REARUMI))-1) + "REA.RJP"
0847	0220	
0888	0220	

55

1104-00-93

6

Reagent Jet Printer
Reagent Calibration

PAGE 3
07-14-86
12:24:37

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
10 0888	0220	OPEN FILES FOR OUTPUT AS #1: 'create new pattern data file
0890	0220	WRITE #1, MEMU(8,0): 'store frequency
0898	0220	WRITE #1, MEMU(1,0): 'store amplitude
08DC	0220	WRITE #1, MEMU(2,0): 'store strobe delay
08F0	0220	WRITE #1, MEMU(3,0): 'store pulse width
091E	0220	WRITE #1, MEMU(4,0): 'store rise time
15 093F	0220	WRITE #1, MEMU(5,0): 'store fall time
0962	0220	
0962	0220	WRITE #1, MEMU(7,1): 'store concentration
0984	0220	WRITE #1, MEMU(8,1): 'store density
09A6	0220	WRITE #1, MEMU(9,1): 'store viscosity
09CB	0220	WRITE #1, MEMU(10,1): 'store surface tension
20 09EA	0220	
09EA	0220	CLOSE #1: 'done with data file
09F1	0220	
09F1	0220	OPEN "READER.RJP" FOR OUTPUT AS #1
0A03	0220	PRINT #1, FILES: 'save filename in default file
0A13	0220	PRINT #1, MEMU(6,1): 'save the directory name as well
25 0A33	0220	CLOSE #1
0A3C	0220	RETURN
0A40	0220	
0A40	0220	SEARCH:
0A45	0220	OPEN "READIR.RJP" FOR INPUT AS #1
30 0A56	0220	INPUT #1, REAMU(1): 'read number of patterns in dir
0A68	0220	IZ = 1: 'set entry pointer
0A6F	0220	
0A6F	0220	SLOOP:
0A74	0220	LINE INPUT #1, A\$: 'read next pattern name from dir
0A81	0220	IF A\$ = MEMU(6,1) THEN GOTO SEARCH.DONE: 'compare name with dir entry
0A85	0220	IZ = IZ + 1
35 0AAE	0220	IF IZ < (REAMU(1) + 1) THEN GOTO SLOOP: 'check for done
0AC1	0220	SEARCH.DONE:
0AC4	0220	CLOSE #1
0ACD	0220	RETURN
0AD1	0220	
40 0AD1	0220	T19: 'return with no change to exit reagent calibrate
0AD6	0220	PRINT #3, "OK";
0AE6	0220	CLOSE #3: 'close ccs channel
0AE9	0220	RETURN
0AF1	0220	
0AF1	0220	T2:
45 0AF6	0220	'process "4" key
0B05	0220	IF MEMU(1) > 5 THEN RETURN
0B0F	0224	MENTIME = TIMER
0B1F	022C	DELTAIME = MENTIME - OLDTIME
0B29	022C	OLDTIME = MENTIME
0B49	022E	IF DELTAIME > 0.15 THEN MULT1 = 1 ELSE MULT1 = MULT1 + 1
0B59	022E	IF MULT1 > 100 THEN MULT1 = 100
50 0B59	022E	MEMU(MEMU(1),0) = MEMU(MEMU(1),0) + MEMU(MEMU(1),3) * MULT1: 'add increment
0B7F	022E	IF MEMU(MEMU(1),0) > MEMU(MEMU(1),1) THEN MEMU(MEMU(1),0) = MEMU(MEMU(1),1): 'check max value
0C06	022E	COLOR 15,1:GOSUB DISPMENU:RETURN: 'show new value
0C10	022E	
0C10	022E	T3:
0C22	022E	'process "-" key
55 0C31	022E	IF MEMU(1) > 5 THEN RETURN
		MENTIME = TIMER

NOV 06 09 05 0 268 237

Reagent Jet Printer
Reagent Calibration

PAGE 6
07-14-86
12:24:57

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
10 0C3B	022E	DELTA TIME = NEWTIME - OLDTIME
0C4B	022E	OLDTIME = NEWTIME
0C55	022E	IF DELTA TIME > 0.15 THEN MULTI = 1 ELSE MULTI = MULTI + 1
0C77	022E	IF MULTI > 100 THEN MULTI = 100
0C89	022E	NEWU(NEWU,0) = NEWU(NEWU,0) - NEWU(NEWU,3) * MULTI: 'sub increment
0CCB	022E	IF NEWU(NEWU,0) < NEWU(NEWU,2) THEN NEWU(NEWU,0) = NEWU(NEWU,2): 'check min value
15 0D32	022E	COLOR 15,1:GOSUB DISPKMU:RETURN: 'show new value
0D49	022E	
0D49	022E	T4: 'process up arrow key
0D4E	022E	IF NEWU XDD 6 = 0 THEN RETURN: 'in top row already
0D63	022E	DIFF1 = -1:GOSUB NEWKMU:RETURN: 'move pointer up one
0D74	0230	
20 0D74	0230	T5: 'process down arrow key
0D79	0230	IF NEWU XDD 6 = 5 THEN RETURN: 'in bottom row already
0D8F	0230	DIFF2 = 1:GOSUB NEWKMU:RETURN: 'move pointer down one
0DA0	0230	
0DA0	0230	T6: 'process left arrow key
0DAS	0230	IF INT(NEWU / 4) = 0 THEN RETURN: 'in left column already
25 0DC5	0230	DIFF3 = -6:GOSUB NEWKMU:RETURN: 'move pointer one left
0DD6	0230	
0DD6	0230	T7: 'process right arrow key
0DD8	0230	IF INT(NEWU / 6) = 2 THEN RETURN: 'in right column already
0DFE	0230	DIFFZ = 6:GOSUB NEWKMU:RETURN: 'move pointer one right
0E0F	0230	
30 0E0F	0230	TB: 'input keys into KEYBUFs until (cr) is entered
0E14	0230	IF NEWU > 10 THEN RETURN
0E23	0230	LOCATE 25,30:COLOR 31,0:PRINT "ENTER NEW VALUE";:COLOR 15,0
0E35	0230	KEYBUFs = AS
0E5F	0234	WHILE AS <> CHR\$(13)
0E72	0234	LOCATE 25,47:PRINT SPACES(15);
35 0E8F	0234	LOCATE 25,47:PRINT KEYBUFs;
0E9V	0234	AS = ""
0EB3	0234	WHILE AS = ""
0EC2	0234	AS = INKEYs
0EEC	0234	IF ACTIVE1 = 1 AND DOWNTIME < TIMER THEN GOSUB PEN.DOWN
0EF6	0234	NEWU
40 0EF9	0234	IF AS = CHR\$(8) AND LEN(KEYBUFs) > 0 THEN KEYBUFs = LEFT\$(KEYBUFs,LEN(KEYBUFs)-1)
0F3B	0234	IF AS > CHR\$(31) AND LEN(KEYBUFs) < 15 THEN KEYBUFs = KEYBUFs + AS
0F75	0234	NEWU
0F79	0234	
0F79	0234	IF NEWU > 5 THEN GOTO STORESTRING
0F88	0234	
45 0F88	0234	TEMP = VAL(KEYBUFs) 'temp has value of keys input
0F98	0238	
0F98	0238	'round off temp according to step size in sens array
0F98	0238	TEMP = INT(TEMP / (NEWU(NEWU,3) + .5)) * NEWU(NEWU,3)
0FD1	0238	
50 0FD1	0238	'test TEMP for obvious and obvious values in sens array
0FD1	0238	IF TEMP > NEWU(NEWU,1) THEN TEMP = NEWU(NEWU,1)
1019	0238	IF TEMP < NEWU(NEWU,2) THEN TEMP = NEWU(NEWU,2)
104F	0238	
104F	0238	'insert new value into sens array and update screen
104F	0238	NEWU(NEWU,0) = TEMP
55 106B	0238	LOCATE 25,30:PRINT SPACES(40);

0 268 227

8 Request Jet Printer
Request Calibration

PAGE 7
07-14-86
12:26:57

IBM Personal Computer BASIC Compiler V2.00

Offset	Date	Source Line
10	1000	0738 COLOR 0,7:GOSUB DISPMENU
	100A	0738 RETURN
	100E	0738
	100E	0738 STORESTRING:
	10A3	0738 MENU\$(MENU\$,1) = KEYBUF\$
	10AF	0738 LOCATE 25,30:PRINT SPACES(40);
15	100C	0738 COLOR 0,7:GOSUB DISPMENU
	10EE	0738 RETURN
	10F2	0738
	10F2	0738 PELDOR:
	10F7	0738 DOWTIME = TIMER + 1
	1107	0738 PRINT 83,"0");
20	1117	0738 RETURN
	111B	0738
	111B	0738 ANYKEY:
	1120	0738 LOCATE 25,64:PRINT "Strike any key...";
	113A	0738 AS = ""
	1144	0738 WHILE AS = ""
25	1153	0738 AS = INKEY\$
	115D	0738 MENU
	1160	0738 LOCATE 25,1:COLOR 15,0:PRINT SPACES(79);:COLOR 15,1
	1196	0738 RETURN
	119A	0738
	119A	0738 MENUMENU: "write old item in yellow, point to and highlight new item
30	119F	0738 COLOR 14,0:GOSUB DISPMENU
	11B1	0738 MENU\$ = MENU\$ + DIFF\$
	11B0	0738 IF MENU\$ = 11 THEN MENU\$ = 10
	11CF	0738 IF MENU\$ > 15 THEN MENU\$ = 15
	11E1	0738 COLOR 0,7:GOSUB DISPMENU:RETURN
	11F7	0738
35	11F7	0738 INITIALIZE:
	11FC	0738 "change to second screen and display messages
	11FC	0738 SCREEN 0,0,1,1:COLOR 7,0:CLS:LOCATE 10,28:PRINT "Initializing Menu Display";
	1240	0738 LOCATE 12,33:PRINT "Please Wait..."
	125A	0738
40	125A	0738 "initialize variables
	125A	0738
	125A	0738 ACTIVE\$ = 0: not printing
	1261	0738
	1261	0738 "initialize plotter con channel
	1261	0738
45	1261	0738 OPEN "COM1:2400,N,8,2" AS #3
	1273	0738 PRINT #3,";UECS,EFV1,R";
	1293	0738
	1293	0738 "initialize digital port
	1293	0738 SCR1 = 4
	129A	0738 CALL DIGITAL.OUT(SCR1)
50	129A	0738 SCR1 = 0
	12A1	0738 CALL DIGITAL.OUT(SCR1); "pulse reset line to set amplitude to 0V.
	12B1	0738 SCR1 = 4
	12B8	0738 CALL DIGITAL.OUT(SCR1)
	12C8	0738
	12C8	0738 "set hardware pulse width
65	12C8	0738 CALL SET.DOT.WIDTH(5) "in module PCI

0 268 237

5 Reagent Jet Printer
Reagent Calibration

PAGE 8
07-14-84
12:24:57

ISA Personal Computer BASIC Compiler V2.00

```

Offset- Data      Source Line
10 12DE 023E      'initialize beam arrays
12DE 023E      RESTORE A00DATA
12E3 023E      FOR I=0 TO 17
12E3 023E          READ MEMU(I,0),MEMU(I,1),
131B 023E          READ MEMU(I,2),MEMU(I,3),MEMU(I,4)
137C 023E      NEXT I
138F 023E      'set default reagent values
138F 023E      MEMU(0,0) = 2000:      'frequency
138F 023E      MEMU(1,0) = 0:        'amplitude
138F 023E      MEMU(2,0) = 1:        'strobe delay
13C4 023E      MEMU(3,0) = 090:      'pulse width
13C0 023E      MEMU(4,0) = 470:      'rise time
13FC 023E      MEMU(5,0) = 670:      'fall time
141B 023E      MEMU(6,0) = 0:        'mass
1436 023E      MEMU(7,0) = 0:        'concentration
1452 023E      MEMU(8,0) = 0:        'density
146E 023E      MEMU(9,0) = 0:        'viscosity
148A 023E      MEMU(10,0) = 0:       'surface tension
14A6 023E      OLD.AMP.VALUE = 0      'initial value of 0 volts
14C2 023E
14C2 023E      'change active displayed screen to first screen to draw and display parameters
14C9 023E      SCREEN 0,0,0,1:CLS
14C9 023E
14C9 023E      COLOR 13:LOCATE 1,32:PRINT "REAGENT CALIBRATE";
14E6 023E      COLOR 9
1507 023E      FOR I=2 TO 79
150E 023E          LOCATE 3,I:PRINT "0";LOCATE 5,I:PRINT "H";LOCATE 19,I:PRINT "0";
1518 023E      NEXT I
153F 023E      FOR J=4 TO 18
153A 023E          LOCATE 1,1:PRINT "3";LOCATE 1,28:PRINT "4";LOCATE 1,69:PRINT "5";LOCATE 1,80:PRINT "3";
1594 023E      NEXT I
1608 023E      RESTORE TABLE
1626 023E      FOR I=1 TO 12
1629 023E          READ RI,C1,X1:LOCATE RI,C1:PRINT CHR$(X1);
1637 023E      NEXT I
166A 0244
1685 0244      'print three headings and instructions
1685 0244      COLOR 10,0
1685 0244      LOCATE 4,7:PRINT "DROP PARAMETERS";
1691 0244      LOCATE 4,39:PRINT "REAGENT PARAMETERS";
16A3 0244      LOCATE 4,71:PRINT "COMMANDS";
16C3 0244
16DF 0244
16DF 0244      COLOR 7:LOCATE 21,20:PRINT "Use ";COLOR 15:PRINT CHR$(27);CHR$(32);CHR$(26);
1729 0244      PRINT CHR$(32);CHR$(24);CHR$(32);CHR$(25);COLOR 7:PRINT " to position highlighted cursor";
1768 0244      LOCATE 23,18:PRINT "Use ";COLOR 15:PRINT " ";COLOR 7:PRINT " or ";COLOR 15:PRINT "-";
178E 0244      COLOR 7:PRINT " to scroll current value up or down";
17D2 0244      LOCATE 23,26:PRINT "Use ";COLOR 15:PRINT "DY";COLOR 7:PRINT " to activate selection";
1814 0244
55

```


0 268-237

11040095

5

10

15

20

Reagent Jet Printer
Reagent Calibration

PAGE 9
07-14-86
12:26:57

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
25		
1814	0244	DISP.PARMS:
1819	0244	'display 18 menu choices in yellow
1819	0244	
1819	0244	COLOR 14,0
1825	0244	FOR MENU = 0 TO 17
30 1829	0244	GOSUB DISPMENU
1831	0244	NEXT MENU
1841	0244	
1841	0244	'set for reagent name and highlight it
1841	0244	MENU = 6:COLOR 0,7
1854	0244	GOSUB DISPMENU
35 185A	0244	
185A	0244	SCREEN 0,0,0,0
186F	0244	RETURN
1873	0244	REN SPACE

40

45

50

55

0 268.237

5

Reagent Jet Printer
Reagent Calibration

PAGE 10

07-14-86

12:26:57

IBM Personal Computer BASIC Compiler V2.00

```

10 Offset  Date  Source Line
      1873 0244 DISP MENU:
      1878 0244 LOCATE (MENU MOD 61)+2+7, (INT(MENU/61)+28+2)+15+INT(MENU/42)
      1884 0244 PRINT MENU$(MENU,0)
      1887 0244 IF MENU > 5 THEN GOTO SHOWSTRING: ' no value to display
25 1901 0244 LOCATE (MENU MOD 61)+2+7,MENU(MENU,4)
      1933 0244 PRINT USING MENU$(MENU,1);MENU(MENU,0);
      1966 0244 IF MENU > 2 THEN RETURN
      1975 0244 ON MENU+1 GOSUB SET.FREQ, SET.AMP, SET.DELAY
      1986 0244 RETURN
20 198A 0244 SHOWSTRING:
      198F 0244 IF MENU > 10 THEN RETURN
      199E 0244 LOCATE (MENU MOD 61)+2+7,48
      198A 0244 PRINT "
      19C7 0244 LOCATE (MENU MOD 61)+2+7,48
      19E3 0244 PRINT MENU$(MENU,1)
25 1A02 0244 RETURN
      1A06 0244
      1A06 0244 SET.FREQ:
      1A08 0244 TEMP = MENU(0,0)
      1A24 0244 CALL SET.DUT.RATE(TEMP); 'in module PCI
      1A34 0244 LED1 = 3-INT((TEMP*500)/1000)
30 1A57 0244 IF LED1 < 0 THEN LED1 = 0
      1A69 0244 SCRI = 4 + (LED1 * 32); 'set LED intensity
      1A89 0244 CALL DIGITAL.OUT(SCRI); 'in module PCI
      1A99 0244 RETURN
      1A9D 0244
      1A9D 0244 SET.AMP:
35 1AA2 0244 SCRI = CINT(MENU(MENU,0) * 33 / 150); 'convert volts to binary number
      1ACB 0244 IF SCRI = OLD.AMP.VALUE1 THEN RETURN
      1A0C 0244 TEMP1 = SCRI - OLD.AMP.VALUE1; 'calculate delta
      1AE8 0244 OLD.AMP.VALUE1 = SCRI; 'update old value to current value
      1AEF 0244 DIG.VAL1 = 8
      1AF6 0244 IF TEMP1 < 0 THEN DIG.VAL1 = 3
40 1B08 0244 TEMP1 = ABS(TEMP1)
      1B15 0244 FOR I1 = 1 TO TEMP1
      1B22 0244 SCRI = DIG.VAL1 + (32*LED1)
      1B3F 0244 CALL DIGITAL.OUT(SCRI); 'pulse higher or lower
      1B4F 0244 SCRI = 4 + (32 + LED1)
      1B6F 0244 CALL DIGITAL.OUT(SCRI); 'set port to normal
45 1B7F 0244 NEXT I1
      1B91 0244 RETURN
      1B95 0244
      1B95 0244 SET.DELAY:
      1B9A 0244 TEMP = MENU(2,0)
      1B96 0244 CALL SET.STROBE.DELAY(TEMP); 'in module PCI
50 1BC6 0244 RETURN
      1BCA 0244 REX SPACE

```

55

104-00-95

gent Jet Printer
gent Calibration

PAGE 11

07-14-84

12:26:57

IBM Personal Computer BASIC Compiler V2.00

```

Offset  Data  Source Line
18CA 024C ***** DATA USED BY THIS MODULE *****
18CA 024C
75 18CA 024C ARDATA:
18CF 024C DATA "Frequency" Hz,"10,000",10000,1,1,16
18D1 024C DATA "Amplitude" V,"1000",150,0,1,19
18D3 024C DATA "Stroke Delay" uS,"10,000.0",15999.5,.5,.5,16
18D5 024C DATA "Pulse Width" ,"1000",999,0,1,19
18D7 024C DATA "Rise Time" ,"1000",999,0,1,19
20 18D9 024C DATA "Fall Time" ,"1000",999,0,1,19
18DB 024C DATA "Mass","",0,0,0,0
18DD 024C DATA "Concentration","",0,0,0,0
18DF 024C DATA "Density","",0,0,0,0
18E1 024C DATA "Viscosity","",0,0,0,0
18E3 024C DATA "Surface Tension","",0,0,0,0
25 18E5 024C DATA "",0,0,0,0
18E7 024C DATA "START","",0,0,0,0
18E9 024C DATA "LOAD","",0,0,0,0
18EB 024C DATA "SAVE","",0,0,0,0
18ED 024C DATA "EXIT","",0,0,0,0
18EF 024C DATA "",0,0,0,0
30 18F1 024C DATA "",0,0,0,0
18F3 024C
18F3 024C TABLE:
18F8 024C DATA 3,1,218
18FA 024C DATA 3,28,210
18FC 024C DATA 3,69,210
35 18FE 024C DATA 3,80,191
1C00 024C DATA 5,1,198
1C02 024C DATA 5,28,206
1C04 024C DATA 5,69,206
1C06 024C DATA 5,80,181
1C08 024C DATA 19,1,192
40 1C0A 024C DATA 19,28,208
1C0C 024C DATA 19,69,208
1C0E 024C DATA 19,80,217
1C10 024C
1C10 024C END SUB
1C17 024C
45 1C17 024C
23EB- 024C

```

50426 Bytes Available
43960 Bytes Free

50 0 Warning Error(s)
0 Severe Error(s)

55

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

6      0030 0006 REM TITLE: 'Reagent Jet Printer' $SUBTITLE: 'Pattern Entry/Modif
      0030 0006 ication'
      0030 0006 'MODULE - 'PATENT' Pattern creation, modification, and filing
      0030 0006 '
10     0030 0006 'AUTHOR - M. A. Enevold
      0030 0006 '
      0030 0006 'COPYRIGHT (C) 1985 ABBOTT LABORATORIES
      0030 0006 '
15     0030 0006 'REVISION - 1.2 03-10-86 NAE Remove Mouse inputs
      0030 0006 '
      0030 0006 '      1.1 02-20-86 NAE Add 80 pattern limit to save
      0030 0006 '      1.0 01-13-86 NAE Creation of initial code
      0030 0006 '
      0030 0006 'SYSTEM - This code can only be compiled by the BASCOM
      0030 0006 '      COMPILER, it will not run under the INTERPRETER!!
20     0030 0006 '
      0030 0006 'DESCRIPTION:
      0030 0006 '      This module allows the user to LOAD, SAVE, DIRECTORY, D
      0030 0006 RAW and
25     0030 0006 '      enter repeat count and other parameters for a pattern t
      0030 0006 o be printed.
      0030 0006 '      The low-resolution graphics mode is selected and a menu
      0030 0006 is displayed
      0030 0006 '      across the bottom of the screen. Using arrow keys
30     0030 0006 '      point to the action to be taken and then invoke that ac
      0030 0006 tion with the
      0030 0006 '      Enter key. In the RAW mode, another menu is
      0030 0006 displayed which allows the user to select from LINE, RE
      0030 0006 CTangle,
      0030 0006 '      Solid RECTangle, or CIRCLE pattern elements.
35     0030 0006 '
      0030 0006 'DATA DICTIONARY
      0030 0006 '      SCDATZ(50,5) 51 Row (Elements) by 6 Column array f
      0030 0006 or storing pattern elements
40     0030 0006 '      CURSORZ(9) Storage for cursor graphics icon
      0030 0006 '      MENUS(6) Up to 7 menu names can be saved here
      0030 0006 '      ELNUMZ Count of number of elements in a patt
      0030 0006 ern
      0030 0006 '      XZ YZ Current location of graphics cursor
45     0030 0006 '      GRID Value of one dot space on the screen
      0030 0006 (default is 0.005")
      0030 0006 '      ROWZ COLZ Location to print instructions
      0030 0006 '      AS Storage for single key-strokes or inp
      0030 0006 ut strings
50     0030 0006 '      MENUNUM Which menu is being displayed (1 or 2
      0030 0006 )
      0030 0006 '      ITEM Pointer to which menu item is highlig
      0030 0006 hted (0 - 6)
      0030 0006 '      REPEATZ Number of times pattern is to be repe
      0030 0006 ated when printed
55     0030 0006 '      IDFF YOFF X and Y axis distance between the pri
      0030 0006 nting of repeated patterns
      0030 0006 '      ROWSP COLSP Row and Column spacing for printing a
      0030 0006 ultiple sets of patterns

```

M 04 00 95 0 268 237

6

10

15

```

Reagent Jet Printer                                PAGE 2
Pattern Entry/Modification                        07-05-86
                                                10:46:13
Offset  Data  Source Line  IBM Personal Computer BASIC Compiler V2.00

0030 0006  * PATDIRZ      Number of patterns stored in
20      0006  * DRDZL DCOLI    Row and Column location to display di
      0006  * NAMES      Pattern name to be LOAded or SAVED to
      0006  *          directory
25      0006  * IZ JZ      Counters used to LOAD or SAVE the ele
      0006  * FILE$     Name of pattern data file
      0006  * TEMPZ     Which type of element is being drawn.
30      0006  * 1 = Line 2 = Rectangle
      0006  * 3 = Solid Rectangle 4 = Circle
      0006  * FLASZ     Same as TEMPZ above
      0006  * STARTMSG; ENDMSG; Message display for startpoint and en
35      0006  * IIZ YIZ   Starting cursor position for
      0006  *          element being drawn
      0006  * DIZ DYI    Delta I and Y values used to
      0006  *          re-position cursor after arrow key
40      0006  * MAXITEM   The highest number item in th
      0006  *          e current menu display
      0006  * IS IE      Starting and ending I position of the
      0006  *          menu highlighting blue box
      0006  * RADIUSZ    The calculated radius of a ci
45      0006  *          rcle to be displayed
      0006  * REM $PAGE

```

50

55

0 268 237

5

Reagent Jet Printer
Pattern Entry/Modification

PAGE 3
07-05-86
10:46:13

10

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

15

20

25

30

35

40

45

50

55

```

0030 0006 SUB PATENTRY STATIC
0047 0006
0047 0006 WIDTH 40:SCREEN 1:CLS
005F 0006 DIM SCMDAT$(50,5),CURSOR$(9),MENU$(6)
0060 029A ELNUM% = 0:IX=0:YI=0:GRID = 0.005
007F 02A4
007F 02A4 LINE (0,0)-(6,6),,B
00A1 02A4 LINE (0,3)-(6,3),,B
00C5 02A4 LINE (3,0)-(3,6),,B
00E9 02A4 PRESET (3,3)
00F5 02A4 GET (0,0)-(6,6),CURSOR$
0116 02A4 CLS
011D 02A4
011D 02A4 LINE (0,0)-(319,190),,B
0140 02A4
0140 02A4 RESTORE INSTRU
0147 02A4 FOR I=1 TO 4
0151 02A4 READ ROWI,COLI,As
0164 02AC LOCATE ROWI,COLI:PRINT As;
0180 02AC NEXT I
0198 02B0
0198 02B0 FIRST:
01A0 02B0 MENUNUM = 1
01AA 02B4 GOSUB SUBMENU
01B0 02B4
01B0 02B4 ON ITEM + 1 GOTO PATDIR, PATLOAD, PATSAVE, PATDRAW, REP
EAT, PATEXT
01CD 02B8 GOTO FIRST
01D0 02B8
01D0 02B8 REPEAT:
01D5 02B8 GOSUB ITEMBOXERASE: 'erase blue box around DIR
01DB 02B8 LOCATE 25,1:PRINT SPACE$(39); 'erase menu line
01FB 02B8 LOCATE 25,1:INPUT;"Enter Repeat Count ",REPEAT$
0218 02BA LOCATE 25,1:PRINT SPACE$(39); 'erase menu line
0235 02BA LOCATE 25,1:INPUT;"Enter I Axis Offset ",IOFF
0255 02BE LOCATE 25,1:PRINT SPACE$(39); 'erase menu line
0272 02BE LOCATE 25,1:INPUT;"Enter Y Axis Offset ",YOFF
0292 02C2 GOTO FIRST
0296 02C2 PATENT:
0298 02C2 WIDTH 80:SCREEN 0:CLS
02B2 02C2 EXIT SUB
02B6 02C2 REM $PAGE

```

0 268 237

6

10

20

25

30

35

40

45

50

55

Reagent Jet Printer
Pattern Entry/Modification

PAGE 4
07-05-86
10:46:13

```

Offset  Data   Source Line      IBM Personal Computer BASIC Compiler V2.00

02B6  02C2  PATDIR:           'list directory of patterns
02B8  02C2          GOSUB ITENEOTIERASE: 'erase blue box around DIR
02C1  02C2          LOCATE 25,1:PRINT SPACES(39); 'erase menu line
02DE  02C2          OPEN "PATDIR.RJP" FOR INPUT AS #1; 'open directory
                                file
02EF  02C2          INPUT #1, PATNUM1: 'read number of patterns in dir
                                ectory
0301  02C4          LINE (1,1)-(318,189),0,BF: 'erase graphics tablet
0326  02C4          I = 0: 'set counter
0330  02C4          DISLOOP:
0330  02C4          I = I + 1: 'set for next value
0344  02C4          IF I > PATNUM1 THEN GOTO DIREXIT: 'test for done
035B  02C4          IF INT((I-1)/44) <> (I-1)/44 THEN GOTO SHOWNEXT
0364  02C4          IF INT((I-1)/44) < 1 THEN GOTO SHOWNEXT
03A9  02C4          LOCATE 25,1:PRINT "More to Display. Continue ? (Y or N)
03C3  02C4          *;
03C9  02C4          GOSUB CORLOOP: 'wait for Y or N response
                                IF AS = "N" THEN GOTO DIREXIT: 'if N then don't contin
                                ue
03DC  02C4          LINE (1,1)-(318,189),0,BF: 'erase graphics tablet
0401  02C4          SHOWNEXT:
0406  02C4          DROWZ = ((I - 1) MOD 22) + 2: 'calculate row for disp
                                lay
0422  02C6          DCOLZ = 4: 'set column to 4
0429  02C8          IF ((I - 1) MOD 44) > 21 THEN DCOLZ = 23: 'reset column
                                if necessary
044C  02C8          LINE INPUT #1, AS: 'read next name from directory
0459  02C8          LOCATE DROWZ,DCOLZ:PRINT AS; 'PRINT NAME
0475  02C8          GOTO DISLOOP
0479  02C8          DIREXIT:
047E  02C8          CLOSE #1: 'terminate access to PATDIR.RJP
0485  02C8          GOTO FIRST
0489  02C8          REM $PAGE

```

0 268 237

Reagent Jet Printer
Pattern Entry/Modification

PAGE 5
07-05-86
10:46:13

IBM Personal Computer BASIC Compiler V2.00

```

5      0489 02C3  PATLOAD:
      048E 02C3      GOSUB ITXGDIERASE: 'erase blue box around DIR
      0494 02C3      OPEN "PATDIR.RJP" FOR INPUT AS #1
      04A5 02C3      INPUT #1,PATNUMZ: 'read number of patterns in dir
10     04B7 02C3      GOSUB GETNAME: 'prompt for and input pattern n
      use
      04BD 02C3      LINE (1,1)-(318,189),0,BF: 'erase graphics tablet
      04E2 02C3
      04E2 02C3      GOSUB SEARCH
15     04EB 02C3
      04EB 02C3      IF IZ < (PATNUMZ + 1) THEN GOTO FOUND
      04FC 02C3      LOCATE 10,16-(LEN(Names)/2):PRINT Names;" not Found";
      0531 02CE      LOCATE 12,14:PRINT "Strike Any Key"
      054B 02CE      GOSUB ANYKEY: 'wait for a keyhit
20     0551 02CE      GOTO FIRST
      0555 02CE
      0555 02CE      FOUND:
      055A 02CE      Files$ = RIGHT$(STR$(IZ),LEN(STR$(IZ))-1) + "PAT.RJP"
      057E 02D2      OPEN Files$ FOR INPUT AS #1: 'set pattern data file
25     for read
      058F 02D2      INPUT #1,ELNUMZ: 'read number of elements in pat
      tern
      05A1 02D2      INPUT #1,GRID: 'read grid size
      05B3 02D2      INPUT #1,REPEATZ: 'read repeat count
30     05C5 02D2      INPUT #1,XOFF: 'read x axis offset for repeat
      05D7 02D2      INPUT #1,YOFF: 'read y axis offset for repeat
      05E9 02D2
      05E9 02D2      FOR IZ = 0 TO ELNUMZ - 1
      05F7 02D4      FOR JZ = 0 TO 5
35     05FD 02D4      INPUT #1,SCREEN$(IZ,JZ):'read file into screen
      array
      0621 02D6      NEXT JZ
      0631 02D6      NEXT IZ
      0643 02D6      CLOSE #1: 'done with data file
40     064A 02D6
      064A 02D6      OPEN "PATDEF.RJP" FOR OUTPUT AS #1
      065C 02D6      PRINT #1,Files$: 'save filename in default file
      066C 02D6      PRINT #1,Names: 'save the directory name as well
45     067C 02D6      CLOSE #1
      0683 02D6
      0683 02D6      GOTO REDRAW
      0687 02D6
50     0687 02D6      SEARCH:
      068C 02D6      IZ = 1: 'set entry pointer
      0693 02D6      SLOOP:
      0698 02D6      LINE INPUT #1,As: 'read next pattern name from dir
      r
55     06A5 02D6      IF As = Names$ THEN GOTO SEARCH.END: 'compare name w
      ith dir entry
      06B8 02D6      IZ = IZ + 1
      06C1 02D6      IF IZ < (PATNUMZ + 1) THEN GOTO SLOOP:'check for done
      06D4 02D6      SEARCH.END:

```


M 04 00 35 0 268 237

5

10

15

20

25

Reagent Jet Printer
Pattern Entry/Modification

PAGE 6
07-05-86
10:46:13

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
06D9	02D6	CLOSE #1:	'not found so close file and display me
		ssage	
06E0	02D6	RETURN	
06E4	02D6		
06E4	02D6	REM SPAGE	

35

40

45

50

55

Resagent Jet Printer
Pattern Entry/Modification

0 268 237

PAGE 7
07-05-86
10:46:13

```
Offset Data Source Line ISM Personal Computer BASIC Compiler V2.00

5      06E4 02D6 PATSAVE:
      06E9 02D6      60SUB ITENSOTERASE: 'erase blue box around DIR
      06EF 02D6      IF ELNUM1 = 0 THEN GOTO FIRST: 'no elements in pattern
      06FE 02D6      OPEN "PATDIR.RJP" FOR INPUT AS #1
10     070F 02D6      INPUT #1,PATNUM1
      0721 02D6      IF PATNUM1 < 80 THEN GOTO SAVE.PAT: 'directory full
                                at 80 patterns
      0730 02D6      CLOSE #1
      0737 02D6      LOCATE 25,1:PRINT SPACE$(139):: 'erase bottom l
15     0754 02D6      ine LOCATE 25,1:PRINT "Directory is full (80 patterns max)"
                                ;
      076E 02D6      60SUB ANYKEY:GOTO FIRST
      0778 02D6      SAVE.PAT:
20     077D 02D6      60SUB GETNAME: 'prompt for and get pattern name
      0783 02D6      60SUB SEARCH
      0789 02D6      IF I1 > PATNUM1 THEN GOTO ADD.NEW.PATTERN
      079A 02D6      LINE (1,1)-(318,189),0,BF: 'erase graphics tablet
      07BF 02D6      LOCATE 10,13-(LEN(NAME$)/2):PRINT NAME$; 'already exist
25     s.*;
      07F4 02D6      LOCATE 12,15:PRINT "Replace it?"
      080E 02D6      PATNUM1 = I1
      0815 02D6      AS = ""
      081F 02D6      WHILE AS = ""
30     082E 02D6          AS = INKEY$
      0838 02D6      WEND
      0838 02D6      IF AS = "Y" OR AS = "y" THEN GOTO SAVE.PATTERN
      0864 02D6      GOTO FIRST
35     0868 02D6      ADD.NEW.PATTERN:
      086D 02D6      KILL "PATDIR.OLD": 'delete old backup directory
      0874 02D6      NAME "PATDIR.RJP" AS "PATDIR.OLD": 'save old direc
                                tory
40     087E 02D6      OPEN "PATDIR.OLD" FOR INPUT AS #1
      088F 02D6      OPEN "PATDIR.RJP" FOR OUTPUT AS #2: 'set up new dir
      08A1 02D6      INPUT #1,PATNUM1: 'read number of dir entries
      08B3 02D6      PATNUM1 = PATNUM1 + 1: 'increase by 1
      08BC 02D6      WRITE #2,PATNUM1: 'save in new directory
      08CD 02D6      FOR I=1 TO PATNUM1 - 1
45     08E6 02DA          LINE INPUT #1,AS: 'read entry from old dir
      08F3 02DA          PRINT #2,AS: 'write entry in new directory
      0903 02DA      NEXT I
      091E 02DA      PRINT #2,NAME$: 'write new entry to new directo
50     ry
      092E 02DA      CLOSE #1:CLOSE #2: 'done with directory
      093C 02DA      SAVE.PATTERN:
      0941 02DA      FILES = RIGHTS(STR$(PATNUM1),LEN(STR$(PATNUM1))-1) + "P
                                AT.RJP"
      0965 02DA      OPEN FILES FOR OUTPUT AS #1: 'create new pattern dat
55     a file
      0977 02DA      WRITE #1,ELNUM1: 'store number of elements
      0988 02DA      WRITE #1,GRID: 'store grid dimension
      0998 02DA      WRITE #1,REPEAT1: 'store repeat count
      09A9 02DA      WRITE #1,IOFF: 'store x axis offset for repeat
```

M 04 00 00 0 268 237

6

10

15

20

Reagent Jet Printer
Pattern Entry/Modification

PAGE 8
07-05-86
10:46:13

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
0989	02DA	WRITE #1,YCFF:	'store y axis offset for repeat
09C9	02DA	FOR IZ = 0 TO ELNMI - 1	
09D7	02DC	FOR JZ = 0 TO 5	
09DD	02DC	WRITE #1,SENDATX(IZ,JZ):	'write screen a
		rray to file	
0A03	02DC	NEXT JZ	
0A10	02DC	NEXT IZ	
0A22	02DC	CLOSE #1:	'done with data file
0A29	02DC	OPEN "PATDEF.RIP" FOR OUTPUT AS #1	
0A3B	02DC	PRINT #1,FILES:	'save filename in defau
		lt file	
0A4B	02DC	PRINT #1,NAME\$:	'save the directory naa
		e as well	
0A5B	02DC	CLOSE #1	
0A62	02DC	GOTO FIRST	
0A66	02DC	REM SPACE	

40

45

50

55

```

5      0A60 02DC  PATERM:
      0A65 02DC      GOSUB ITEMBOIERASE
      0A71 02DC      LINE (1,1)-(318,189),0,BF:      'Erase graphics tablet
      0A96 02DC
10     0A96 02DC  NEXTEL:
      0A9E 02DC      MENUNUM = 2
      0AA5 02DC      GOSUB SUBMENU
      0AAB 02DC
      0AAB 02DC      ON ITEM + 1 GOTO ALINE, RECT, ACIRCLE, REDRAW, B
15     ACKUP
      0ACB 02DC      GOTO NEXTEL
      0ACB 02DC
      0ACB 02DC  BACKUP:
      0AD0 02DC      GOSUB ITEMBOIERASE
20     0AD6 02DC      GOTO FIRST
      0ADA 02DC
      0ADA 02DC  ALINE:
      0ADF 02DC      TEMP1 = 1
      0AE6 02DE      STARTXSS = 'STARTING ENDPOINT'
25     0AF0 02E2      ENDXSS = 'ENDING ENDPOINT '
      0AFA 02E6      GOTO ENTERELEMENT
      0AFE 02E6
      0AFE 02E6  RECT:
      0B03 02E6      TEMP1 = 2
30     0B0A 02E6      GOTO RECTXSS
      0B0E 02E6
      0B0E 02E6  SRECT:
      0B13 02E6      TEMP1 = 3
      0B1A 02E6  RECTXSS:
35     0B1F 02E6      STARTXSS = 'STARTING CORNER'
      0B29 02E6      ENDXSS = 'ENDING CORNER '
      0B33 02E6      GOTO ENTERELEMENT
      0B37 02E6
      0B37 02E6  ACIRCLE:
40     0B3C 02E6      TEMP1 = 4
      0B43 02E6      STARTXSS = 'CENTER OF CIRCLE'
      0B4B 02E6      ENDXSS = 'POINT ON CIRCLE '
      0B57 02E6
      0B57 02E6  ENTERELEMENT:
45     0B5C 02E6      GOSUB ITEMBOIERASE
      0B62 02E6      FLAG1=0
      0B69 02EB      LOCATE 25,1:PRINT SPACES(39);
      0B86 02EB      LOCATE 25,1:PRINT STARTXSS;
      0BA0 02EB      GOSUB DISPCURSOR
50     0BA6 02EB  FINDSTART:
      0BAB 02EB      GOSUB KCUSEACT
      0BB1 02EB      IF AS = CHR$(27) THEN GOTO ABORT
      0BC8 02EB      IF AS = CHR$(13) THEN GOTO SETSTART
      0BDF 02EB      GOSUB CURSORMOVE
      0BES 02EB      GOTO FINDSTART
55     0BEE 02EB  ABORT:
      0BED 02EB      GOSUB PLACECURSOR
      0BF3 02EB      GOTO NEXTEL
      0BF7 02EB

```

0 268 237

5

10

Resgent Jet Printer
Pattern Entry/Modification

PAGE 10
07-05-86
10:46:13

15

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

20

25

30

35

40

45

50

55

```

0BF7 02EB SETSTART:
0BFC 02EB LOCATE 25,1:PRINT ENDS68;
0C16 02EB FLAG% = TEMP1:Y1% = Y1:Y1% = Y1
0C28 02EC IF FLAG% = 4 THEN PSET (Y1+4,Y1+4)
0C35 02EC FINDEND:
0C5A 02EC GOSUB MOUSEACT
0C60 02EC IF AS = CHR$(27) THEN GOTO CANCELEL
0C77 02EC IF AS = CHR$(13) THEN GOTO SAVEEL
0C8E 02EC GOSUB CURSORMOVE
0C94 02EC GOTO FINDEND
0C97 02EC CANCELEL:
0C9C 02EC GOSUB PLACECURSOR
0CA2 02EC ON FLAG% GOSUB ER1, ER2, ER3, ER4
0CB3 02EC FLAG% = 0
0CBA 02EC GOTO NEXTEL
0CBE 02EC SAVEEL:
0CC3 02EC GOSUB PLACECURSOR
0CC9 02EC IF FLAG% = 4 THEN CIRCLE (Y1+4,Y1+4),SQR((Y1-Y1%)*2+(
Y1-Y1%)*2),,1
0D32 02EC GOSUB CORRECT
0D38 02EC IF AS="M" THEN GOTO REDRAW
0D4B 02EC STOREEL:
0D50 02EC SCNDAT$(ELNUM1,0) = FLAG%
0D6A 02EC SCNDAT$(ELNUM1,1) = Y1%
0D85 02EC SCNDAT$(ELNUM1,2) = Y1%
0DA0 02EC SCNDAT$(ELNUM1,3) = Y1
0DBB 02EC SCNDAT$(ELNUM1,4) = Y1
0DD6 02EC SCNDAT$(ELNUM1,5) = 0
0DEF 02EC ELNUM1 = ELNUM1 + 1
0DFB 02EC FLAG% = 0
0DFF 02EC GOTO NEXTEL
0E03 02EC REM SPAGE

```

0 268 237

Reagent Jet Printer
Pattern Entry/Modification

PAGE 11
07-05-86
10:46:13

IBM Personal Computer BASIC Compiler V2.00

```

5      Offset Data      Source Line
      0E03 02EC REDRAW:
      0E08 02EC      GOSUB ITEMBOXERASE
      0E0E 02EC      LINE(1,1)-(318,189),0,BF
      0E33 02EC      IF ELNUM% = 0 THEN GOTO NEXTEL
10     0E42 02EC
      0E42 02EC      FOR I=0 TO ELNUM%-1
      0E58 02F0          ON SCNDATZ(1,0) GOSUB RD1, RD2, RD3, RD4
      0E81 02F0      NEXT I
      0E9C 02F0      GOTO NEXTEL
15     0EA0 02F0
      0EA0 02F0      ***** Sub-routines called by main module *****
      0EA0 02F0
      0EA0 02F0      SUBMENU:
      0EA5 02F0
20     0EA5 02F0          LOCATE 25,1:PRINT SPACE$(39);
      0EC2 02F0          ON MENUNUM GOSUB MENU1, MENU2
      0ED1 02F0
      0ED1 02F0          FOR I=0 TO 6
      0EDB 02F0              READ MENU$(I)
25     0EF2 02F0              LOCATE 25,(I+6)*2:PRINT MENU$(I);
      0F2B 02F0          NEXT I
      0F46 02F0
      0F46 02F0          READ MAXITEM
      0F4D 02F4          ITEM = 0
30     0F57 02F4
      0F57 02F4      NEWITEM:
      0F5C 02F4          GOSUB NEWITEMBOX
      0F62 02F4
      0F62 02F4      NEXTITEM:
35     0F67 02F4          GOSUB ITEMSEARCH
      0F6D 02F4          IF AS = CHR$(13) THEN RETURN: ITEM has correct value
      0FB4 02F4          IF LEN(AS) < 2 THEN BEEP:GOTO NEXTITEM
      0F9A 02F4          IF ASC(IND$(AS,2,1)) = 75 THEN GOTO LEFTAR
      0FB6 02F4          IF ASC(IND$(AS,2,1)) = 77 THEN GOTO RIGHTAR
40     0FD2 02F4          BEEP:GOTO NEXTITEM
      0FD9 02F4
      0FD9 02F4      LEFTAR:
      0FDE 02F4          IF ITEM = 0 THEN GOTO NEXTITEM
      0FEE 02F4          GOSUB ITEMBOXERASE
45     0FF4 02F4          ITEM = ITEM - 1
      1003 02F4          GOTO NEWITEM
      1007 02F4
      1007 02F4      RIGHTAR:
      100C 02F4          IF ITEM = MAXITEM THEN GOTO NEXTITEM
50     101F 02F4          GOSUB ITEMBOXERASE
      1025 02F4          ITEM = ITEM + 1
      1034 02F4          GOTO NEWITEM
      1038 02F4
      1038 02F4      MENU1:
55     103D 02F4          RESTORE MX1
      1044 02F4          RETURN
      1048 02F4
      1048 02F4      MENU2:
      104D 02F4          RESTORE MX2

```

```

5      1054 02F4      RETURN
      1058 02F4
      1058 02F4      ITENSEARCH:
      105D 02F4      AS = INDEX$(IF AS < ) ** THEN RETURN
10     107A 02F4      GOTO ITENSEARCH
      107D 02F4      RETURN
      1081 02F4
      1081 02F4      NEWITENSODI:
      1086 02F4      IS = (ITEM*48) + 7
      109C 02F8      IE = (ITEM*48) + 8 + LEN(ITEM)*8
15     10D9 02FC      LINE (IS,191)-(IE,199),1,8
      1101 02FC      RETURN
      1105 02FC
      1105 02FC      ITENSODIENASE:
      110A 02FC      LINE (IS,191)-(IE,199),0,8
20     1131 02FC      RETURN
      1135 02FC
      1135 02FC      PLACECURSOR:
      113A 02FC      PUT (IZ+1,YI+1),CURSOR1
      1157 02FC      RETURN
25     115B 02FC
      115B 02FC      MOUSEACT:
      1160 02FC      GOSUB ANYKEY
      1166 02FC      DXI = 0 : DYI = 0
30     1174 0300      IF AS = CHR$(10) + CHR$(172) THEN DYI = -1:RETURN
      119D 0300      IF AS = CHR$(10) + CHR$(160) THEN DYI = 1:RETURN
      11C6 0300      IF AS = CHR$(10) + CHR$(177) THEN DXI = 1:RETURN
      11EF 0300      IF AS = CHR$(10) + CHR$(175) THEN DXI = -1:RETURN
      1218 0300      IF AS = "8" THEN DYI = -20:RETURN
35     1232 0300      IF AS = "2" THEN DYI = 20:RETURN
      124C 0300      IF AS = "4" THEN DXI = -20:RETURN
      1266 0300      IF AS = "6" THEN DXI = 20:RETURN
      1280 0300      IF AS = CHR$(27) THEN RETURN
      1297 0300      IF AS = CHR$(13) THEN RETURN
40     12AE 0300      GOTO MOUSEACT
      12B2 0300
      12B2 0300      CURSORMOVE:
      12B7 0300      GOSUB PLACECURSOR
      12B9 0300      ON FLAG1 GOSUB ER1, ER2, ER3, ER4
45     12CE 0300      IX = IX + DXI : YI = YI + DYI
      12E6 0300      IF IX < 0 THEN IX = 0
      12F8 0300      IF IX > 311 THEN IX = 311
      1308 0300      IF YI < 0 THEN YI = 0
      131D 0300      IF YI > 182 THEN YI = 182
50     1330 0300      ON FLAG2 GOSUB DR1, DR2, DR3, DR4
      1341 0300      GOSUB DISPCURSOR
      1347 0300      RETURN
      134B 0300
      134B 0300      CORRECT:
55     1350 0300      LOCATE 25,1:PRINT SPACE$(39);
      136D 0300      LOCATE 25,1:PRINT "IS THIS CORRECT? (Y or N) ";
      1387 0300      CORLOOP:
      138C 0300      GOSUB ANYKEY
      1392 0300      IF AS = "y" OR AS = "Y" THEN AS = "Y":GOTO CORRECT

```

Reagent Jet Printer
Pattern Entry/Modification

0 268 232

PAGE 13
07-05-86
10:46:13

IBM Personal Computer BASIC Compiler V2.00

```
5      13C5 0300      IF AS = "n" OR AS = "N" THEN AS = "N":GOTO COREIIT
      13FB 0300      GOTO CORLOOP
      13FB 0300  COREIIT:
      1400 0300      LOCATE 25,1:PRINT SPACE$(39);
      141D 0300      RETURN
10     1421 0300
      1421 0300  DISPCURSOR:
      1426 0300      GOSUB PLACECURSOR
      142C 0300      LOCATE 25,27:PRINT USING "+.###";XZ + GRID;
      1436 0300      PRINT ", ";
15     1463 0300      PRINT USING "+.###";YZ + GRID;
      1480 0300      RETURN
      1484 0300
      1484 0300
      1484 0300  RD1:
20     1489 0300      LINE(SCNDATZ(I,1)+4,SCNDATZ(I,2)+4)-(SCNDATZ(I,3)+4,SCN
      DATZ(I,4)+4)
      1522 0300      RETURN
      1526 0300
      1526 0300  RD2:
25     152B 0300      LINE(SCNDATZ(I,1)+4,SCNDATZ(I,2)+4)-(SCNDATZ(I,3)+4,SCN
      DATZ(I,4)+4),,B
      15C4 0300      RETURN
      15C8 0300
      15C8 0300  RD3:
30     15CD 0300      LINE(SCNDATZ(I,1)+4,SCNDATZ(I,2)+4)-(SCNDATZ(I,3)+4,SCN
      DATZ(I,4)+4),,BF
      1667 0300      RETURN
      166B 0300
      166B 0300  RD4:
35     1670 0300      RADIUSZ = SQR((SCNDATZ(I,3)-SCNDATZ(I,1))^2 + (SCNDATZ(I
      1,4)-SCNDATZ(I,2))^2)
      16FF 0302      CIRCLE (SCNDATZ(I,1)+4,SCNDATZ(I,2)+4),RADIUSZ,,,1
      175D 0302      RETURN
      1761 0302
40     1761 0302  DR1:
      1766 0302      LINE (XIZ+4,YIZ+4)-(XIZ+4,YZ+4)
      17AF 0302      RETURN
      17B3 0302
      17B3 0302  DR2:
45     17B8 0302      LINE (XIZ+4,YIZ+4)-(XIZ+4,YZ+4),,B
      1801 0302      RETURN
      1805 0302
      1805 0302  DR3:
50     180A 0302      LINE (XIZ+4,YIZ+4)-(XIZ+4,YZ+4),,BF
      1854 0302      RETURN
      1858 0302
      1858 0302  DR4:
      185D 0302      RETURN
      1861 0302
55     1861 0302  ER1:
      1866 0302      LINE (XIZ+4,YIZ+4)-(XIZ+4,YZ+4),0
      18AF 0302      RETURN
      18B3 0302
```


0 268 237

```

5      Reagent Jet Printer                                PAGE 14
      Pattern Entry/Modification                          07-05-86
                                                    10:46:13
      Offset Data Source Line IEM Personal Computer BASIC Coapiler V2.00

      1883 0302 ER2:
10      1888 0302 LINE (X1Z+4,Y1Z+4)-(XZ+4,YZ+4),0,B
      1901 0302 RETURN
      1905 0302
      1905 0302 ER3:
      190A 0302 LINE (X1Z+4,Y1Z+4)-(XZ+4,YZ+4),0,BF
15      1954 0302 RETURN
      1958 0302
      1959 0302 ER4:
      195D 0302 RETURN
      1961 0302
20      1961 0302 ANYKEY:
      1966 0302 AS = ""
      1970 0302 WHILE AS = ""
      197F 0302 AS = INKEY$
      1989 0302 WEND
25      198C 0302 RETURN
      1990 0302
      1990 0302 GETNAME: 'prompt for and get filename
      1995 0302 LOCATE 25,1:PRINT SPACES(39);
      19B2 0302 LOCATE 25,38:PRINT "<<"; 'boundry chevron
30      19CC 0302 LOCATE 25,1:PRINT "Enter Pattern Name ";
      19E6 0302 LINE INPUT; "",NAME$
      19F4 0302 RETURN
      19FB 0302
      19FB 0302 ' Data fields used by this module
35      19FB 0302
      19FB 0302 MN1:
      19FD 0302 DATA "DIR","LOAD","SAVE","DRAW","REPT","EXIT","",5
      19FF 0302
      19FF 0302 MN2:
40      1A04 0302 DATA "LINE","RECT","ERECT","CIRCL","REDRAW","MAIN","",5
      1A06 0302
      1A06 0302 INSTRU:
      1A0B 0302 DATA 8,16,"USE ARROWS"
      1A0D 0302 DATA 10,9,"TO SELECT FROM THE MENU"
45      1A0F 0302 DATA 14,12,"USE THE ENTER KEY"
      1A11 0302 DATA 16,10,"TO ACTIVATE SELECTION"
      1A13 0302
      1A13 0302 END SUB
      1A1A 0302
50      21AF 0302

50426 Bytes Available
43373 Bytes Free

55      0 Warning Error(s)
      0 Severe Error(s)

```

Reagent Jet Printer
Burr-Brown PCI-20000 custom driver

PAGE 1
06-30-86
08:38:16

```

Offset  Data  Source Line  IBM Personal Computer BASIC Compiler V2.00

5      0030 0006 REM $TITLE:'Reagent Jet Printer' $SUBTITLE:'Burr-Brown PCI-2000
      0030 0006 0 custom driver'
      0030 0006 'MODULE - "PCI" Driver for the PCI-20000 I/O and PULSE cards
      0030 0006 '
10     0030 0006 'AUTHOR - M. S. Fairchild of Computing Architects Inc.
      0030 0006 '
      0030 0006 '113 Fairfield Way
      0030 0006 'Bloomington, IL 60108
      0030 0006 '312/980-6777
      0030 0006 '
15     0030 0006 'COPYRIGHT (C) 1985 ABBOTT LABORATORIES
      0030 0006 '
      0030 0006 'REVISION - 1.2 12-16-85 MSF Add digital I/O initialization, and
      0030 0006 output routine
      0030 0006 '
20     0030 0006 ' - 1.1 12-10-85 MSF Move counter module to position 2
      0030 0006 '
      0030 0006 ' - 1.0 11-22-85 MSF Creation of initial code
      0030 0006 '
      0030 0006 'SYSTEM - This code can only be compiled by the BASCOM V2
25     0030 0006 ' COMPILER, it will not run under the INTERPRETER!!
      0030 0006 '
      0030 0006 'DESCRIPTION:
      0030 0006 ' The PCI module is a group of routines used to a
      0030 0006 ccess
30     0030 0006 ' the BURR-Brown PCI-20000 board. The supplied software c
      0030 0006 auses
      0030 0006 ' the Wordstar2000 software to malfunction and will not p
      0030 0006 rvide
      0030 0006 ' explicit on, off functions for the counters. Custom dr
35     0030 0006 ivers
      0030 0006 ' will be made to provide all of the desired functions.
      0030 0006 '
      0030 0006 '
      0030 0006 ' Address Register
40     0030 0006 ' %HC0000 Carrier I.D. / module present (R)
      0030 0006 '
      0030 0006 ' %HC0040 Module interrupt status (R)
      0030 0006 '
      0030 0006 ' %HC0060 Digital I/O port 0 (R/W)
      0030 0006 '
      0030 0006 ' %HC0081 Digital I/O port 1 (R/W)
      0030 0006 '
      0030 0006 ' %HC0082 Buffer direction and enable (R/W)
45     0030 0006 '
      0030 0006 ' %HC0083 Control for ports 0 and 1 (W)
      0030 0006 '
      0030 0006 ' %HC00C0 Digital I/O port 2 (R/W)
      0030 0006 '
      0030 0006 ' %HC00C1 Digital I/O port 3 (R/W)
      0030 0006 '
      0030 0006 ' %HC00C3 Control for ports 2 and 3 (W)
      0030 0006 '
50     0030 0006 ' %HC0200 Read module I.D. (1110 1010)
      0030 0006 '
      0030 0006 ' %HC0204 Rate generator low-order 16 bits (0)
      0030 0006 '
      0030 0006 ' %HC0205 Rate generator high-order 16 bits (1)
      0030 0006 '
      0030 0006 ' %HC0206 Counter 3 count register (2)
      0030 0006 '
      0030 0006 ' %HC0207 Rate generator/counter 3 control
      0030 0006 '
55     0030 0006 ' %HC0208 Counter 0 count register (0)
      0030 0006 '
      0030 0006 ' %HC0209 Counter 1 count register (1)
      0030 0006 '
      0030 0006 ' %HC020A Counter 2 count register (2)
      0030 0006 '
      0030 0006 ' %HC020B Counter 0 - 2 control
      0030 0006 '
      0030 0006 ' %HC020C Counter gate control (1 enables, 0 disa

```

5

10

Reagent Jet Printer
Burr-Brown PCL-20000 custom driver

PAGE 2
06-30-86
08:38:16

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

15

```

bles:
0030 0006 . bit function
0030 0006 . 0 Rate generator gate
0030 0006 . 1 Rate generator gate
0030 0006 . 2 Counter 0 gate
20 0030 0006 . 3 Counter 1 gate
0030 0006 . 4 Counter 2 gate
0030 0006 . 5 Counter 3 gate
0030 0006 . 6 Not used
0030 0006 . 7 Not used
25 0030 0006 .
0030 0006 .
0030 0006 DATA DICTIONARY
0030 0006 .
0030 0006 COUNT - Divisor to 2Mhz rate to give desired frequenc
30 0030 0006 y or time
COUNTM - High order 16 bits of a 32 bit divisor
0030 0006 COUNTL - Low order 16 bits of a 32 bit divisor
0030 0006 LSBZ - Lower 8 bits of a 16 bit divisor
35 0030 0006 MSBZ - Upper 8 bits of a 16 bit divisor
0030 0006
0030 0006 Main line code
0030 0006 The main line code is never executed. It's sole purpose
it to
40 0030 0006 declare shared the variables that will be used in the subrou
ines
0030 0006 so that they will all be defined and hold their values.
0030 0006
0030 0006 MAIN:
45 0030 0006 DIM SHARED COUNT,COUNTM,COUNTL,LSBZ,MSBZ
0030 0006
0030 0006 MAINLOOP:
0030 0006 GOTO MAINLOOP
004C 0012
50 004C 0012 REM SPACE

```

55

```

Offset  Data  Source Line  IEN Personal Computer BASIC Compiler V2.00

6      004C 0012 'SUBROUTINE - FCI.INIT
      004C 0012
      004C 0012 'DESCRIPTION:
      004C 0012 ' The FCI.INIT subroutine initializes the PCI hardware.
10     004C 0012
      004C 0012 END FCI.INIT STATIC
      0053 0012
      0053 0012 DEF SEG = &H0000: 'Point segment to PCI-20000 board
      005A 0012
      005A 0012 POKE &H020C,&H00: 'Disable all software enabled counter
15
      0063 0012
      0063 0012 ' Configure rate generator to 2 Khz
      0063 0012
      0063 0012 POKE &H0207,&H34: 'Set low rate counter to mode 2
20     006D 0012 POKE &H0207,&H74: 'Set high rate counter to mode 2
      0077 0012 POKE &H0204,&H02: 'Load low rate counter with 16 bits 0
      0081 0012 f 2
      0081 0012 POKE &H0204,&H00
25     008A 0012 POKE &H0205,&H02: 'Load high rate counter with 16 bits
      0094 0012 of 2
      0094 0012 POKE &H0205,&H00
      009D 0012 POKE &H020C,&H03: 'Enable rate counters
      00A7 0012
      00A7 0012 ' Configure dot rate counters (default to 5 Khz)
30     00A7 0012
      00A7 0012 POKE &H020B,&H34: 'Set low dot counter (0) to mode 2
      00B1 0012 POKE &H020B,&H74: 'Set high dot counter (1) to mode 2
      00B3 0012 POKE &H020B,&H04: 'Load low rate counter with 16 bits 0
35
      00C5 0012 f 4
      00C5 0012 POKE &H020B,&H00
      00CE 0012 POKE &H0209,&H64: 'Load high rate counter with 16 bits
      00DB 0012 of 100
      00DB 0012 POKE &H0209,&H00
40     00E1 0012
      00E1 0012 ' Configure dot pulse with one shot (default to 13 usec)
      00E1 0012
      00E1 0012 POKE &H0203,&H02: 'Set dot pulse with oneshot (2) to 00
45
      00EB 0012 de 1
      00EB 0012 POKE &H020A,&H1A: 'Load oneshot with 16 bits of 26
      00F3 0012 POKE &H020A,&H00
      00FE 0012
      00FE 0012 ' Configure shifted strobe pulse one shot (default to .5 usec)
      00FE 0012
      00FE 0012 POKE &H0207,&H82: 'Set shifted strobe onshot (3) to 00
50
      0108 0012 e 1
      0108 0012 POKE &H0206,&H01: 'Load oneshot with 16 bits of 1
      0112 0012 POKE &H0206,&H00
      011B 0012
      011B 0012 ' Configure port 0 to output and port 1 to input
55     011B 0012
      011B 0012 POKE &H0083,&H82: ' Set up I/O chip
      0125 0012 POKE &H0082,&H34: ' Set up direction and enable buffers
      012F 0012 POKE &H0080,&H00: ' Dissable print head

```

0 268 237
 1104000000

5

10

15

20

25

30

35

40

45

50

55

Regent Jet Printer
 Burr-Brown PCI-20500 custom driver

PAGE 4
 06-30-86
 08:38:16

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

0135 0012      END SUB
013F 0012
013F 0012  REM $PAGE1F:12
013F 0012  'SUBROUTINE - DOT.ON
013F 0012  '
013F 0012  'DESCRIPTION:
013F 0012  '      The DOT.ON subroutine enables the dot frequency counter
25 013F 0012  '
013F 0012  SUB DOT.ON STATIC
013F 0012
0146 0012
0146 0012      POKE &H020C,&H0F: 'Enable dot counters and rate generat
30 0146 0012      or
0150 0012
0150 0012      END SUB
0157 0012
0157 0012  REM $PAGE1F:12
0157 0012  'SUBROUTINE - DOT.OFF
0157 0012  '
0157 0012  'DESCRIPTION:
0157 0012  '      The DOT.OFF subrou... disables the dot counters
35 0157 0012
0157 0012  SUB DOT.OFF STATIC
0157 0012
015E 0012
015E 0012      POKE &H020C,&H03: 'Disable dot counters and enable rate
40 015E 0012      generator
0168 0012
0168 0012      END SUB
45 016F 0012
016F 0012  REM $PAGE1F:49

```

0 268 237

Reagent Jet Printer
Burr-Brown PCI-20000 custom driver

PAGE 5
06-30-86
08:38:16

```

5      Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

      016F 0012 'SUBROUTINE - SET.DOT.RATE
      016F 0012 '
10     016F 0012 'DESCRIPTION:
      016F 0012 ' The SET.DOT.RATE subroutine loads the dot rate counters
      016F 0012 ' with the desired dot frequency. Allowed range is 10,000 to 1
      016F 0012 ' Hz.
      016F 0012 ' The FREQ parameter is a real number in Hz.
15     016F 0012 SUB SET.DOT.RATE(FREQ) STATIC
      0176 0012 ' Limit frequency to in range
      0176 0012
      0176 0012 IF FREQ < 1 THEN FREQ = 1
20     018F 0012 IF FREQ > 10000 THEN FREQ = 10000
      01A8 0012 ' Convert to count and check for 16 bit count or 32 bit count
      01A8 0012
      01A8 0012 COUNT = 2E6 / FREQ
25     01B8 0012 IF COUNT < 65536 THEN GOTO DIVIDE16 ELSE GOTO DIVIDE32
      01CF 0012
      01CF 0012 ' Process count of 32 bits
      01CF 0012
30     01CF 0012 DIVIDE32:
      01D0 0012 COUNTL = INT((COUNT/32768) + 1) 'Stage lower count
      01F0 0012 COUNTH = INT(COUNT/COUNTL) 'Form upper count
      0208 0012 GOTO SET.COUNT
      020F 0012
35     020F 0012 ' Process count of 16 bits
      020F 0012
      020F 0012 DIVIDE16:
      0214 0012 COUNTL = 2
      0218 0012 COUNTH = INT(COUNT/2)
40     0232 0012 GOTO SET.COUNT
      0236 0012
      0236 0012 ' Send the derived counts out to the counters
      0236 0012
      0236 0012 SET.COUNT:
45     0237 0012 LSB = COUNTL MOD 256: ' Send out low 16 bits
      0248 0012 MSB = INT(COUNTL / 256)
      0263 0012 POKE &H0208,LSB
      0273 0012 POKE &H0208,MSB
      0283 0012
50     0283 0012 LSB = COUNTH MOD 256: 'Send out high 16 bits
      0291 0012 MSB = INT(COUNTH / 256)
      02AC 0012 POKE &H0209,LSB
      02BC 0012 POKE &H0209,MSB
      02CC 0012
55     02CC 0012 END SUB
      02D3 0012
      02D3 0012 REX $PAGEIF:27

```

0 268 237

5

10

15

20

25

30

35

40

45

50

55

Reagent Jet Printer
Burr-Brown FCI-20000 custom driver

PAGE 6
06-30-86
08:38:16

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
02D3	0012	*SUBROUTINE - SET.DOT.WIDTH	
02D3	0012	*	
02D3	0012	*DESCRIPTION:	
02D3	0012	* The SET.DOT.WIDTH subroutine loads the dot width one sh	
		ot	
02D3	0012	* with the desired dot pulse width. Allowed range is .5 to 16,0	
		00 usec.	
		* The width parameter is a real number in usec.	
02D3	0012	SUB SET.DOT.WIDTH(DWIDTH) STATIC	
02DA	0012	* Limit width to in range	
02DA	0012		
02DA	0012	IF DWIDTH < .5 THEN DWIDTH = .5	
02F3	0012	IF DWIDTH > 16000 THEN DWIDTH = 16000	
030C	0012	* Convert to count	
030C	0012		
030C	0012	COUNT = DWIDTH / .5	
031A	0012	* Send the derived count out to the counter	
031A	0012		
031A	0012	LSB% = INT(COUNT MOD 256): ' Send out 16 bits	
0331	0012	MSB% = INT(COUNT / 256)	
0348	0012	POKE &H020A,LSB%	
0358	0012	POKE &H020A,MSB%	
0368	0012		
0368	0012	END SUB	
036F	0012		
036F	0012	REM \$PAGEIF:27	

0 268 237

Reagent Jet Printer
Burr-Brown PCI-20000 custom driver

PAGE 7
06-30-86
08:38:16

```

5      Offset Data   Source Line      IBM Personal Computer BASIC Compiler V2.00

      036F 0012 'SUBROUTINE - SET.STROBE.DELAY
      036F 0012 '
      036F 0012 'DESCRIPTION:
10     036F 0012 ' The SET.STROBE.DELAY subroutine loads the strobe delay
      036F 0012 ' one shot
      036F 0012 ' with the desired strobe delay time. Allowed range is .5 to 16
      036F 0012 ' ,000 usec.
      036F 0012 ' The delay parameter is a real number in usec.
15     036F 0012
      036F 0012 SUB SET.STROBE.DELAY(DELAY) STATIC
      0376 0012
      0376 0012 ' Limit delay to in range
      0376 0012
      0376 0012 IF DELAY < .5 THEN DELAY = .5
20     038F 0012 IF DELAY > 16000 THEN DELAY = 16000
      03AB 0012
      03AB 0012 ' Convert to count
      03AB 0012
      03AB 0012 COUNT = DELAY / .5
25     03B6 0012
      03B6 0012 ' Send the derived count out to the counter
      03B6 0012
      03B6 0012 LSB1 = INT(COUNT MOD 256): ' Send out 16 bits
30     03CD 0012 MSB1 = INT(COUNT / 256)
      03E4 0012 POKE &H0206,LSB1
      03F4 0012 POKE &H0206,MSB1
      0404 0012
      0404 0012 END SUB
35     040B 0012
      040B 0012 REM $PAGEIF:16
      040B 0012 'SUBROUTINE - DIGITAL.OUT
      040B 0012 '
      040B 0012 'DESCRIPTION:
40     040B 0012 ' The DIGITAL.OUT subroutine sends the passed integer to
      040B 0012 ' the output
      040B 0012 ' port 0.
      040B 0012
      040B 0012 SUB DIGITAL.OUT(BYTE1) STATIC
45     0412 0012
      0412 0012 ' Send the byte to the port
      0412 0012
      0412 0012 POKE &H0080,BYTE1
      0423 0012
      0423 0012 END SUB
50     042A 0012
      057F 0012

```

50426 Bytes Available
48723 Bytes Free

0 Warning Error(s)
0 Severe Error(s)

0 268 237- 0000

5

Reagent Jet Printer
Pattern Printing

PAGE
09-1
08:4

IBM Personal Computer BASIC Compiler V

```

10  Offset  Data      Source Line
      0030 0004  *FILE: 'Reagent Jet Printer' $SUBTITLE: 'Pattern Printing' $LINESIZE:132
      0030 0004  *TITLE - 'PATPRINT'
      0030 0004  *
      0030 0004  *AUTHOR - M. A. Ensvold
      0030 0004  *
15  0030 0004  *COPYRIGHT (C) 1985 ANNOTI LABORATORIES
      0030 0004  *
      0030 0004  *REVISION - 2.0 07-07-84 MAE Modified for MicroFab Printhead
      0030 0004  *          - 1.1 03-07-85 MAE Added notes and final touches
      0030 0004  *          - 1.0 02-03-84 MAE Creation of initial code
      0030 0004  *
20  0030 0004  *SYSTEM - This code can only be compiled by the BASCOM
      0030 0004  *          COMPILER, it will not run under the INTERPRETER!!
      0030 0004  *
      0030 0004  *DESCRIPTION:
      0030 0004  *          The printing module displays a menu in 3 columns of 4 rows each. The first
25  0030 0004  *          column has data from the default reagent profile. The second column has
      0030 0004  *          data from the default pattern file. The third column has standard printing
      0030 0004  *          data. The four arrow keys allow different menu items to be highlighted and
      0030 0004  *          the values can be changed with the + or - keys or by entering the new number
      0030 0004  *          followed by Enter. P will cause the pattern to be printed, S will select the
      0030 0004  *          notepad, and E will exit to the main program. On the notepad, any single line
30  0030 0004  *          entered here will be sent to the printer. A null line exits the notepad.
      0030 0004  *
      0030 0004  *DATA DICTIONARY
      0030 0004  *
      0030 0004  *MENUZ      Which menu item is highlighted (0-17)
      0030 0004  *
      0030 0004  *DIFFZ      Where to move menu highlight in response to arrow key
      0030 0004  *
      0030 0004  *TYPEZ      What key has been pressed during main scan
      0030 0004  *
35  0030 0004  *ELMZ      Number of elements in current pattern
      0030 0004  *
      0030 0004  *SELCATZ(20,5) Array for storing elements in current pattern
      0030 0004  *
      0030 0004  *REPEATZ    Counter for repeat printing the pattern
      0030 0004  *
      0030 0004  *CTZ       Counter for stepping through the pattern array during printing
      0030 0004  *
      0030 0004  *RADIUSZ    Radius of circle during printing
      0030 0004  *
      0030 0004  *X1 X2      Offsets for start row/column position
40  0030 0004  *
      0030 0004  *REPZ1 REPZ2 Repeat distances for repeat printing of patterns
      0030 0004  *
      0030 0004  *SZ1 SZ2    Starting X and Y positions for solid rectangles
      0030 0004  *
      0030 0004  *EZ1 EZ2    Ending X and Y positions for solid rectangles
      0030 0004  *
      0030 0004  *I1 J1      Counters used for reading pattern files into the array
      0030 0004  *
      0030 0004  *TEMP1      Register for misc. integers
      0030 0004  *
      0030 0004  *NOTELINEZ  Pointer to which line is active in the notepad
45  0030 0004  *
      0030 0004  *MENUZ(17,1) Array of strings used to display menu items
      0030 0004  *
      0030 0004  *AS         Single keystroke input destination
      0030 0004  *
      0030 0004  *NOTES      String entered in notepad and sent to printer
      0030 0004  *
      0030 0004  *PRTZOFZ    String entered from main scan and assigned to number of string field
      0030 0004  *
      0030 0004  *REAGNAMEZ  Name of default reagent
      0030 0004  *
      0030 0004  *PATTNAMEZ  Name of default pattern
50  0030 0004  *
      0030 0004  *FILES      Name of reagent data file and then pattern data file
      0030 0004  *
      0030 0004  *MENU(11,4) Array of values used in displaying menu item numbers
      0030 0004  *
      0030 0004  *TEMP       Register for the temporary storage of real numbers
      0030 0004  *
      0030 0004  *END SPACE

```

55

5 Request Jet Printer
Pattern Printing

PAGE
07-1'
0014'

IBM Personal Computer BASIC Compiler V.

Offset	Data	Source Line
0030	0066	SES PATPRINT STATIC
10 0047	0066	
0047	0066	DIN SENDATE(50,5),MENU(17,1),MENU(17,4)
0048	0462	
0048	0462	GOSUB INITIALIZE: 'read init. values and set screen
004E	0462	
004E	0462	WHILE TYPE1 < 1
15 0059	0464	
0059	0464	TYPE1 = 0
0060	0464	AS = ""
006A	0468	
006A	0468	WHILE AS = ""
0079	0468	AS = INKEY\$
20 0083	0468	WEND
0084	0468	
0086	0468	IF AS = "E" OR AS = "e" THEN TYPE1 = 1: 'exit sub
008E	0468	IF AS = "P" OR AS = "p" THEN TYPE1 = 2: 'print pattern
009E	0468	IF AS = "+" THEN TYPE1 = 3: 'increment variable
00F4	0468	IF AS = "-" THEN TYPE1 = 4: 'decrement variable
25 010A	0468	IF AS = CHR\$(65) + CHR\$(72) THEN TYPE1 = 5: 'up arrow key
012F	0468	IF AS = CHR\$(65) + CHR\$(80) THEN TYPE1 = 6: 'down arrow key
0154	0468	IF AS = CHR\$(65) + CHR\$(75) THEN TYPE1 = 7: 'left arrow key
0179	0468	IF AS = CHR\$(65) + CHR\$(77) THEN TYPE1 = 8: 'right arrow key
019E	0468	IF AS < CHR\$(47) AND AS < CHR\$(58) THEN TYPE1 = 9: 'number 0-9
30 01D6	0468	IF AS = "S" OR AS = "s" THEN TYPE1 = 10: 'enter scratchpad
0202	0468	
0202	0468	ON TYPE1 GOSUB T1, T2, T3, T4, T5, T6, T7, T8, T9, T10
021F	0468	
021F	0468	WEND
0223	0468	TYPE1 = 0
35 022A	0468	
022A	0468	EXIT SUB
022E	0468	
022E	0468	****** SUBROUTINES FOR THIS MODULE *****
0233	0468	T10: 'scratch pad
0233	0468	SCREEN 0,0,2,2:COLOR 7,0
40 0256	0468	LOCATE NOTELINE1,1
0264	046A	NOTELCOP:
0269	046A	LINE INPUT NOTES
0277	046E	IF NOTES = "" THEN SCREEN 0,0,0,0:RETURN
029F	046E	LPRINT NOTES
02AC	046E	IF NOTELINE1 < 24 THEN NOTELINE1 = NOTELINE1 + 1
45 02C0	046E	GOTO NOTELCOP
02C3	046E	
02C3	046E	T1:
02C8	046E	RETURN: 'exit to print screen, no action
02CC	046E	
50 02CC	046E	T3: 'process "+" key
02D1	046E	IF MENU(MENU1,0) >= MENU(MENU1,1) THEN MENU(MENU1,0) = MENU(MENU1,1):RETURN: 'check max value
033C	0470	MENU(MENU1,0) = MENU(MENU1,0) + MENU(MENU1,3): 'add increment
0372	0470	COLOR 0,7:GOSUB DISPMENU:RETURN: 'show new value
0388	0470	
55 0388	0470	T4: 'process "-" key

5 Request Jet Printer
Patterns Printing

Offset Data Source Line

IBM Personal Computer BASIC Compiler V2

PAGE
07-17
08:47

```

10 03C5 0470 IF MENU(MENU,0) (= MENU(MENU,2)) THEN MENU(MENU,0) = MENU(MENU,2):RETURN: 'check min value
03F8 0470 MENU(MENU,0) = MENU(MENU,0) - MENU(MENU,3): 'sub decrement
042E 0470 COLOR 0,7:GOSUB DISPMENU:RETURN: 'show new value
0444 0470
0444 0470 T5: 'process up arrow key
0449 0470 IF MENU MOD 6 = 0 THEN RETURN: 'in top row already
045E 0470 DIFF2 = -1:GOSUB NEWMENU:RETURN: 'move pointer up one
15 046F 0472
046F 0472 T6: 'process down arrow key
0474 0472 IF MENU MOD 6 = 5 THEN RETURN: 'in bottom row already
0482 0472 DIFF2 = 1:GOSUB NEWMENU:RETURN: 'move pointer down one
0498 0472
20 0498 0472 T7: 'process left arrow key
04A0 0472 IF INT(MENU / 6) = 0 THEN RETURN: 'in left column already
04C0 0472 DIFF2 = -6:GOSUB NEWMENU:RETURN: 'move pointer one left
04D1 0472
04D1 0472 T8: 'process right arrow key
04D6 0472 IF INT(MENU / 6) = 2 THEN RETURN: 'in right column already
25 04F9 0472 DIFF2 = 6:GOSUB NEWMENU:RETURN: 'move pointer one right
050A 0472
050A 0472 T9: 'input keys into KEYBUFs until (cr) is entered
050F 0472 LOCATE 25,30:COLOR 31,3:PRINT "ENTER NEW VALUE":COLOR 15,0
0541 0472 KEYBUFs = ""
0548 0472 WHILE AS <> CHR$(13)
30 055E 0476 LOCATE 25,47:PRINT SPACES(20);
0578 0476 LOCATE 25,47:PRINT KEYBUFs;
0595 0476 AS = ""
059F 0476 WHILE AS = ""
05AE 0476 AS = INKEY$
0588 0476
35 0588 0476 IF AS = CHR$(8) AND LEN(KEYBUFs) > 0 THEN KEYBUFs = LEFT$(KEYBUFs,LEN(KEYBUFs)-1)
05FD 0476 IF AS > CHR$(13) THEN KEYBUFs = KEYBUFs + AS
061E 0476
0622 0476 VEND
0632 0476 TEMP = VAL(KEYBUFs) 'temp has value of keys input
0632 0476
40 0632 0476 'round off temp according to step size in menu array
0643 0476 TEMP = INT(TEMP / (MENU(MENU,3)) * .5) + MENU(MENU,3)
0643 0476
0643 0476 'test TEMP for maxium and minium values in menu array
0643 0476 IF TEMP > MENU(MENU,1) THEN TEMP = MENU(MENU,1)
0644 0476 IF TEMP < MENU(MENU,2) THEN TEMP = MENU(MENU,2)
06E7 0476
45 06E7 0476 'insert new value into menu array and update screen
06E9 0476 MENU(MENU,0) = TEMP
0705 0476 LOCATE 25,30:PRINT SPACES(40);
0722 0476 COLOR 0,7:GOSUB DISPMENU
0734 0476 RETURN
0738 0476
50 0738 0476 T2: 'set Burr-Brown board then print desired pattern
0750 0476
0750 0476 BEEP:COLOR 15,0:LOCATE 25,1
075A 0476 PRINT "Set Potentiometers on Printer....then Press any Key";
0767 0476 AS = ""
55 0771 0476 WHILE AS = ""

```

M 0 268 237 00 00

5 Pageant Jet Printer
Pattern Printing

PAGE
09-17
08:49

IBM Personal Computer BASIC Compiler V2

Offset	Data	Source Line
	0780 047A	AS = INDEX
10	078A 047A	MEMO
	0780 047A	LOCATE 25,1:PRINT SPACE(79);
	078A 047A	
	078A 047A	'enter drop parameters into Burr-Brown board
	078A 047A	TEMP = MEMU(0,0):CALL SET.DOT.RATE(TEMP)
	0783 047A	TEMP = 3:CALL SET.DOT.WIDTH(TEMP)
15	07ED 047A	TEMP = MEMU(2,0):CALL SET.STROKE.DELAY(TEMP)
	0819 047A	CALL DOT.ON
	0825 047A	
	0825 047A	TEMP1 = 4
	082C 047C	CALL DIGITAL.OUT(TEMP1)
	083C 047C	TEMP1 = 0: 'pulse RESET line
20	0843 047C	CALL DIGITAL.OUT(TEMP1)
	0853 047C	TEMP1 = 4
	085A 047C	CALL DIGITAL.OUT(TEMP1)
	086A 047C	
	086A 047C	J1 = CINT(MEMU(1,0) * 255 / 150): 'set pulse amplitude by pulsing HIGHER signal J1 number of times
25	0893 047E	FOR I1 = 1 TO J1
	08A0 0480	TEMP1 = 6: 'set HIGHER true
	08A7 0480	CALL DIGITAL.OUT(TEMP1)
	08B7 0480	TEMP1 = 4: 'set HIGHER false
	08BE 0480	CALL DIGITAL.OUT(TEMP1)
	08CE 0480	NEXT I1
30	08E0 0482	
	08E0 0482	'establish COM1: and initialize plotter
	08E0 0482	OPEN "COM1:2400,N,8,2,CS 65535" AS #1
	08F2 0482	PRINT #1,";:UECS,EFVI,M";
	0902 0482	
	0902 0482	'save nozzle offset and establish new origin
35	0902 0482	PRINT #1,"AO";
	0912 0482	
	0912 0482	'calculate row/column location, save there, and set new origin
	0912 0482	I1 = (MEMU(12,0)-1) * (MEMU(14,0) / 0.005)
	0934 0484	J1 = (MEMU(13,0)-1) * (MEMU(15,0) / 0.005)
	0936 0486	PRINT #1,I1;J1;"O";
40	09B4 0486	
	09B4 0486	'print the pattern using repeat count
	09B4 0486	REPLY1 = MEMU(8,0) / 0.005
	09D7 0488	REPLY2 = MEMU(9,0) / 0.005
	09FA 048A	
	09FA 048A	FOR REPEAT1 = 0 TO MEMU(7,0)
45	0A1C 048C	
	0A1C 048C	'print the pattern
	0A1C 048C	FOR CT1 = 0 TO ELNUNT - 1
	0A2A 0490	ON SCNDAT1(CT1,0) GOSUB PLINE, PRECT, FSRECT, PCIRCL
	0A4C 0492	NEXT CT1
	0A5E 0492	
50	0A5E 0492	PRINT #1,"A,0,0,"; 'return to origin
	0A6E 0492	PRINT #1,REPLY1;REPLY2;"O"; 'save to next pattern
	0A8C 0492	NEXT REPEAT1
	0AA1 0494	
	0AA1 0494	PRINT #1,"H"; 'return plotter to original HOME
55	0AB1 0494	

0 268 237

5 Reagent Jet Printer
Pattern Printing

PAGE
09-17
08:49

IBM Personal Computer BASIC Compiler V2

Offset	Data	Source Line
0A51	0494	CLOSE #1: 'disable coils
10 0A58	0494	RETURN
0A5C	0494	PLINE:
0A61	0494	PRINT #1,SCNDATZ(CTL,2);SCNDATZ(CTL,1);"D";
0B03	0494	PRINT #1,SCNDATZ(CTL,4);SCNDATZ(CTL,3);"U";
15 0B45	0494	RETURN
0B49	0494	PRCT:
0B4E	0494	PRINT #1,SCNDATZ(CTL,2);SCNDATZ(CTL,1);"D";
0B50	0494	PRINT #1,SCNDATZ(CTL,4);SCNDATZ(CTL,3);
0BCC	0494	PRINT #1,SCNDATZ(CTL,4);SCNDATZ(CTL,3);
20 0C08	0494	PRINT #1,SCNDATZ(CTL,2);SCNDATZ(CTL,3);
0C44	0494	PRINT #1,SCNDATZ(CTL,2);SCNDATZ(CTL,1);"U";
0C86	0494	RETURN
0C8A	0494	PCIRCL:
25 0C8F	0494	RADIUSZ = SQR((SCNDATZ(CTL,3)-SCNDATZ(CTL,1)) ² + (SCNDATZ(CTL,4)-SCNDATZ(CTL,2)) ²)
0D1A	0496	PRINT #1,"CC ";SCNDATZ(CTL,2);SCNDATZ(CTL,1);RADIUSZ;
0D63	0496	RETURN
0D67	0496	PSRECT:
0D6C	0496	SIZ = SCNDATZ(CTL,4);EIZ = SCNDATZ(CTL,2)
30 0DA9	049A	SYZ = SCNDATZ(CTL,3);EYZ = SCNDATZ(CTL,1)
0DD4	049E	IF EIZ <= SIZ THEN SIZ = SCNDATZ(CTL,2);EIZ = SCNDATZ(CTL,4)
0E15	049E	IF EYZ <= SYZ THEN SYZ = SCNDATZ(CTL,1);EYZ = SCNDATZ(CTL,3)
0E56	049E	PRINT #1,SIZ;SYZ;"D";
0E74	049E	IF EIZ - SIZ > EYZ - SYZ THEN GOSUB STEP1 ELSE GOSUB STEP1
35 0E90	049E	PRINT #1,"U";
0E9D	049E	RETURN
0EB1	049E	STEP1:
40 0EB6	049E	PRINT #1,EIZ;SYZ;
0ECE	049E	SYZ = SYZ + 1
0ED7	049E	IF SYZ > EYZ THEN RETURN
0EEB	049E	PRINT #1,EIZ;SYZ;SIZ;SYZ;
0F0E	049E	SYZ = SYZ + 1
0F17	049E	IF SYZ > EYZ THEN RETURN
45 0F28	049E	PRINT #1,SIZ;SYZ;
0F40	049E	GOTO STEP1
0F44	049E	STEP2:
0F44	049E	PRINT #1,SIZ;EYZ;
0F61	049E	SIZ = SIZ + 1
50 0F6A	049E	IF SIZ > EIZ THEN RETURN
0F7B	049E	PRINT #1,SIZ;EYZ;SIZ;SYZ;
0FA1	049E	SIZ = SIZ + 1
0FAA	049E	IF SIZ > EIZ THEN RETURN
0FBB	049E	PRINT #1,SIZ;SYZ;
0FB3	049E	GOTO STEP1

0 268 237

5 Reagent Jet Printer
Pattern Printing

PAGE
09-17
08:49

IBM Personal Computer BASIC Compiler V2

Offset	Data	Source Line
0FD7	049E	
10	0FD7	049E KEYMENU: 'write old sites in yellow, point to and highlight new sites
0FDC	049E	COLOR 14,0:GOSUB DISPMENU
0FEE	049E	MENU1 = MENU1 + DIFF1
0FFA	049E	IF MENU1 = 10 THEN MENU1 = 9
100C	049E	IF MENU1 = 11 THEN MENU1 = 9
101E	049E	IF MENU1 > 15 THEN MENU1 = 15
15	1030	049E COLOR 0,7:GOSUB DISPMENU:RETURN
1046	049E	
1046	049E	INITIALIZE:
1048	049E	'change to screen 0 and display messages
104B	049E	SCREEN 0,0,1,1:COLOR 7,0:CLS:LOCATE 10,17:PRINT "Loading selected Reagent and Pattern Data Files";
108F	049E	LOCATE 12,33:PRINT "Please Wait..."
20	10A9	049E
10A9	049E	'initialize notepad on screen 2
10A9	049E	SCREEN 0,0,2,1:CLS:COLOR 15
10CE	049E	PRINT "Digital Notepad - - All information typed here is sent to the printer"
10DB	049E	NOTELINE1 = 3
25	10E2	049E
10E2	049E	'initialize menu arrays
10E2	049E	RESTORE AARDATA
10E9	049E	FOR I1=0 TO 17
10EF	049E	READ MENU1(I1,0),MENU1(I1,1):
111F	049E	READ MENU1(I1,1),MENU1(I1,2),MENU1(I1,3),MENU1(I1,4)
30	1180	049E NEXT I1
1193	049E	
1193	049E	'get default reagent file and read values
1193	049E	
1193	049E	OPEN "REAGEF.RJP" FOR INPUT AS #1
11A1	049E	INPUT #1,FILES
35	11B6	04A2 INPUT #1,REAGNAMES
11C8	04A6	CLOSE #1
11CF	04A6	
11CF	04A6	OPEN FILES FOR INPUT AS #1: 'get reagent data
11E0	04A6	INPUT #1,MENU1(0,0): 'frequency
1200	04A6	INPUT #1,MENU1(1,0): 'amplitude
40	1223	04A6 INPUT #1,MENU1(2,0): 'strobe delay
1246	04A6	INPUT #1,MENU1(3,0): 'pulse width
1267	04A6	INPUT #1,MENU1(4,0): 'rise time
128C	04A6	INPUT #1,MENU1(5,0): 'fall time
12B1	04A6	CLOSE #1
12B8	04A6	
45	12B8	04A6 'get default pattern file and read values
12B8	04A6	
12B8	04A6	OPEN "PATDEF.RJP" FOR INPUT AS #1
12C9	04A6	INPUT #1,FILES
12DB	04A6	INPUT #1,PATNAMES
12ED	04AA	CLOSE #1
50	12F4	04AA
12F4	04AA	OPEN FILES FOR INPUT AS #1: 'get pattern data
12D5	04AA	INPUT #1,ELTYPE
1317	04AA	INPUT #1,MENU1(6,0): 'grid
132A	04AA	INPUT #1,MENU1(7,0): 'repeat count
133D	04AA	INPUT #1,MENU1(8,0): 'x offset
55		

0 268 237

6 Reagent Jet Printer
Pattern Printing

PAGE
04-17
08:49

IBM Personal Computer BASIC Compiler V2

Offset	Data	Source Line
1320	04AA	INPUT #1, MENU(9,0); 'y offset
1323	04AA	FOR IZ = 0 TO ELEMEN-1
1326	04AC	FOR JZ = 0 TO 5
1327	04AC	INPUT #1, SCRDATZ(IZ,JZ)
1328	04AC	NEXT JZ
1329	04AC	NEXT IZ
1329	04AC	CLOSE #1
1404	04AC	'set remaining parameters in some array
1404	04AC	MENU(12,0) = 1; 'row 1
1404	04AC	MENU(13,0) = 1; 'column 1
143C	04AC	MENU(14,0) = 0; 'row spacing
1458	04AC	MENU(15,0) = 0; 'column spacing
1474	04AC	'change active displayed screen to screen 0 to draw and display parameters
1474	04AC	SCREEN 0,0,0,1:CLS
1491	04AC	COLOR 13:LOCATE 1,32:PRINT "REAGENT PRINTING";
1492	04AC	COLOR 9
1499	04AC	FOR I=2 TO 79
14C3	04AC	LOCATE 3,1:PRINT CHR\$(176);LOCATE 5,1:PRINT CHR\$(205);LOCATE 18,1:PRINT CHR\$(176);
1523	04B0	NEXT I
153E	04B0	FOR J=4 TO 17
154B	04B0	LOCATE 1,1:PRINT CHR\$(179);LOCATE 1,28:PRINT CHR\$(184);LOCATE 1,54:PRINT CHR\$(186);LOCATE 1,5
15C8	04B0	PRINT CHR\$(179);
15E6	04B0	NEXT I
15ED	04B0	RESTORE TABLE
15F7	04B0	FOR I=1 TO 12
162A	04B6	READ RI,COLN:LOCATE RI,CI:PRINT CHR\$(XCI);
1645	04B6	NEXT I
1645	04B6	'display 16 menu choices in yellow
1645	04B6	COLOR 14,0
1651	04B6	FOR MENU = 0 TO 15
1657	04B6	GOSUB DISPMENU
165D	04B6	NEXT MENU
166D	04B6	'set for first menu entry and highlight it
166D	04B6	MENU = 0:COLOR 0,7
1680	04B6	GOSUB DISPMENU
1686	04B6	'print three headings and instructions
1686	04B6	COLOR 10,0
1692	04B6	LOCATE 4,14.5-LEN(REANAME)/2:PRINT REANAME;
16C1	04B6	LOCATE 4,41-LEN(PATNAME)/2:PRINT PATNAME;
16F0	04B6	LOCATE 4,80:PRINT "PRINT LOCATION";
170A	04B6	COLOR 7:LOCATE 19,20:PRINT "Use ";COLOR 15:PRINT CHR\$(27);CHR\$(32);CHR\$(26);
1734	04B6	PRINT CHR\$(32);CHR\$(24);CHR\$(32);CHR\$(25);COLOR 7:PRINT " to position highlighted cursor";
1793	04B6	LOCATE 20,18:PRINT "Use ";COLOR 15:PRINT "+";COLOR 7:PRINT " or ";COLOR 15:PRINT "-";
17E7	04B6	COLOR 7:PRINT " to scroll current value up or down";

M: 04:08 05 0 268 237

5

10

15

20

Reagent Jet Printer
Pattern Printing

PAGE
09-17-
08:49:

IBM Personal Computer BASIC Compiler V2.

	Offset	Data	Source Line
25	17FD	0486	LOCATE 31.5:PRINT "Use ";:COLOR 15:PRINT "P";:COLOR 7:PRINT " to print pattern or ";
	183F	0486	COLOR 15:PRINT "E";:COLOR 7:PRINT " to exit to print menu";
	1867	0486	PRINT " or ";:COLOR 15:PRINT "S";:COLOR 7:PRINT " to use notepad";
	189C	0486	
	189C	0486	'set screen to view menu just created and exit
	189C	0486	
30	189C	0486	SCREEN 0,0,0,0
	18B1	0486	RETURN
	18B5	0486	
	18B5	0486	DISPMENU:
	18BA	0486	IF MENU1 = 10 OR MENU1 = 11 THEN RETURN
	18CE	0486	LOCATE (MENU1 MOD 6)+2*7,(INT(MENU1/6)+28*2)-2*INT(MENU1/12)
35	1938	0486	PRINT MENU\$(MENU1,0)
	1956	0486	LOCATE (MENU1 MOD 6)+2*7,MENU(MENU1,4)
	196B	0486	PRINT USING MENU\$(MENU1,1);MENU(MENU1,0);
	198B	0486	RETURN
	198F	0486	REM SPACE

40

45

50

55

0 268 237
M 04 08 95

6

Request Jet Printer
Pattern Printing

PAGE

09-17

08:49

Offset Data Source Line

IBM Personal Computer BASIC Compiler V2

```

195F 04B6 ***** DATA USED BY THIS MODULE *****
197F 04B6
75 197F 04B6 AFDATA:
19C4 04B6 DATA "Dot Frequency" Hz,"0.000",10000.1,1,16
19C6 04B6 DATA "Amplitude" V,"0.000",150.0,1,19
19C8 04B6 DATA "Stroke Delay" us,"0.000",15999.5,5,5,16
19CA 04B6 DATA "Pulse Width" ","0.000",999.0,1,19
19CC 04B6 DATA "Rise Time" ","0.000",999.0,1,19
20 19CE 04B6 DATA "Fall Time" ","0.000",999.0,1,19
19D0 04B6 DATA "Grid Size" in,"0.000",.005,.005,45
19D2 04B6 DATA "Repeat Count" ","0.000",99.0,1,47
19D4 04B6 DATA "X Axis Offset" in,"0.000",2.0,.005,45
19D6 04B6 DATA "Y Axis Offset" in,"0.000",2.0,.005,45
19D8 04B6 DATA "X",0,0,0,0
25 19DA 04B6 DATA "X",0,0,0,0
19DC 04B6 DATA "Row to Print" ","0.000",99,1,1,74
19DE 04B6 DATA "Column to Print" ","0.000",99,1,1,74
19E0 04B6 DATA "Row Spacing" in,"0.000",3.0,.005,72
19E2 04B6 DATA "Column Spacing" in,"0.000",3.0,.005,72
30 19E4 04B6 DATA "X",0,0,0,0
19E6 04B6 DATA "X",0,0,0,0
19E8 04B6
19EA 04B6 TABLE:
19ED 04B6 DATA 3,1,218
19EF 04B6 DATA 3,28,219
35 19F1 04B6 DATA 3,54,219
19F3 04B6 DATA 3,80,191
19F5 04B6 DATA 5,1,198
19F7 04B6 DATA 5,28,206
19F9 04B6 DATA 5,54,206
19FB 04B6 DATA 5,80,181
40 19FD 04B6 DATA 18,1,192
19FF 04B6 DATA 18,28,208
1A01 04B6 DATA 18,54,208
1A03 04B6 DATA 18,80,217
1A05 04B6
1A07 04B6 END SUB
45 1A09 04B6
1A0B 04B6
2049 04B6

```

50426 Bytes Available

44716 Bytes Free

50

0 Warning Error(s)

0 Severe Error(s)

55

0 268 237

Reagent Jet Printer
Reagent Filing

PAGE - 1
07-09-86
15:04:35

Offset: Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

5      0030 0006 *EX TITLE: 'Reagent Jet Printer' $SUBTITLE: 'Reagent Filing'
      0030 0006 *MODULE - 'REAFILE' File Handling for reagents
      0030 0006
      0030 0006 *AUTHOR - M. A. Enevold
10     0030 0006
      0030 0006 *COPYRIGHT (C) 1985 ABBOTT LABORATORIES
      0030 0006
      0030 0006 *REVISION - 1.1 03-07-86 KAE Added notes and description
      0030 0006 *          1.0 02-14-86 KAE Creation of initial code
15     0030 0006
      0030 0006 *SYSTEM - This code can only be compiled by the BASCOM
      0030 0006 *          COMPILER, it will not run under the INTERPRETER!!
      0030 0006
      0030 0006 *DESCRIPTION:
20     0030 0006 *          This module allow file handling for reagents. When inv
      0030 0006 *          oled, it displays
      0030 0006 *          the current contents of the reagent directory in 4 colu
      0030 0006 *          ans of 20 entries
      0030 0006 *          each. The reagent which is currently selected for prin
25     0030 0006 *          ting is marked by
      0030 0006 *          an asterisk to the left of the reagent name. After the
      0030 0006 *          directory is listed
      0030 0006 *          the user is presented with 5 menu choices. The left an
      0030 0006 *          d right arrows are
30     0030 0006 *          used to highlight menu items and the enter key is used
      0030 0006 *          to invoke action.
      0030 0006 *          The menu choices and their actions are:
      0030 0006
      0030 0006 *          DELETE - Remove a reagent file from the directo
35     0030 0006 *          ry
      0030 0006 *          COPY - Copy a reagent file to a new reagent n
      0030 0006 *          ame, saving the old reagent
      0030 0006 *          RENAME - Change the name of the reagent without
      0030 0006 *          changing the reagent itself
40     0030 0006 *          SELECT - Select a reagent for printing
      0030 0006 *          EXIT - Return to the main menu
      0030 0006
      0030 0006 *DATA DICTIONARY
      0030 0006 *          TYPEZ Which type of valid key was pushed
45     0030 0006 *          MENUZ Which menu item is being pointer to (0-4)
      0030 0006 *          DIFFZ Distance to move MENUZ at left or right arro
      0030 0006 *
      0030 0006 *          FLAGZ Error type 0-4
      0030 0006 *          POINTERZ Position of REANAMEZ in directory list
50     0030 0006 *          REANUMZ Number of reagent names in directory
      0030 0006 *          list
      0030 0006 *          TEMPZ Storage for integers during reagent copy
      0030 0006 *          AS Misc. input string
      0030 0006 *          FUNCTZ Printed at bottom of screen during prompt fo
65     0030 0006 *          r reagent name
      0030 0006 *          REANAMEZ Reagent name currently being worked on
      0030 0006 *          SELNAMEZ Reagent name currently selected for printing
      0030 0006 *          FILEZ Filename of reagent data file
      0030 0006 *          SFILEZ Filename for source reagent data file used d

```

M 04:08 95 0 268 237

Reagent Jet Printer PAGE 2
 Reagent Filing 07-09-86
 15:04:35
 IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
0030	0006	using copy
0030	0006	FILES Filenase for destination reagent data file u
0030	0006	ses during copy
0030	0006	NEWNAME\$ New reagent name for COPY and RENAME
0030	0006	TEMP\$ Reagent names are held here as the directory
0030	0006	is being re-written
0030	0006	NEWFILES Destination filenase used while copying reagent data files
0030	0006	MESSAGE\$ A message printed at the bottom of the screen
0030	0006	MESS(4,1) Array of strings containing the short and long menu names
0030	0006	ERRMSG\$ Message printed when any error occurs
0030	0006	ERR\$ Appended to ERRMSG\$ to indicate nature of error
0030	0006	REM \$PAGE

Reagent Jet Printer PAGE 3
 Reagent Filing 07-09-86
 15:04:35
 IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
0030	0006	SUB REAGENT.FILE STATIC
0047	0006	GOSUB INITIALIZE
0040	0006	TYPE1 = 0
0054	0008	WHILE TYPE1 <> 3
005F	0008	AS = ""
0069	000C	WHILE AS = ""
007B	000C	AS = INKEY\$
0082	000C	WEND
0085	000C	IF AS = CHR\$(0) + CHR\$(75) THEN TYPE1 = 1:
00AA	000C	IF AS = CHR\$(10) + CHR\$(77) THEN TYPE1 = 2:
00CF	000C	IF AS = CHR\$(13) THEN TYPE1 = 3:
00E9	000C	'(cr) to execute selection
00E9	000C	ON TYPE1 GOSUB T1, T2, T3
00FB	000C	WEND
00FC	000C	EXIT SUB
0100	000C	REM \$PAGE

0 268 237
M 0 4 1 0 0 9 5

5

10

15

Reagent Jet Printer
Reagent Filing

PAGE 4
07-09-86
15:04:35

20

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

25

```

0100 000C ***** SUB-ROUTINES FOR THIS MODULE *****
0100 000C
0100 000C T1:      'left arrow
0103 000C      TYPE1 = 0
010C 000C      IF MENU1 = 0 THEN RETURN
011B 000E      DIFF1 = -1
0122 0010      GOSUB KEY.MENU
0128 0010      RETURN
012C 0010
012C 0010 T2:      'right arrow
0131 0010      TYPE2 = 0
0138 0010      IF MENU2 = 4 THEN RETURN
0147 0010      DIFF2 = 1
014E 0010      GOSUB KEY.MENU
0154 0010      RETURN
0158 0010
0158 0010 T3:      '(cr) (execute selected menu item)
015D 0010      LOCATE 25,1:PRINT SPACES(79);
017A 0010      ON MENU3 + 1 GOSUB T3A, T3B, T3C, T3D, T3E
018F 0010      GOSUB KEY.ON
0195 0010      RETURN
0199 0010
0199 0010 REM #PAGE

```

45

50

55

0 268 237

Reagent Jet Printer PAGE 5
 Reagent Filing 07-09-86
 15:04:33

IBM Personal Computer BASIC Compiler V2.00

6	Offset	Data	Source Line
	0199	0010	TJA: 'delete reagent
	019E	0010	TYPEZ = 0
	01A5	0010	FUNCT\$ = "Delete"
	01AF	0014	GOSUB GET.SOURCE
10	01B5	0014	IF LEN(REANAME\$) = 0 THEN RETURN
	01C7	0018	IF REANAME\$ = SELNAME\$ THEN FLAGZ = 4:GOSUB SHOW.ERROR:
			RETURN
	01E7	001E	GOSUB SEARCH
	01ED	001E	IF POINTERZ = 0 THEN FLAGZ = 1:GOSUB SHOW.ERROR:RETURN
15	0209	0020	
	0209	0020	MESSAGE\$ = "Deleting " + REANAME\$ + " Please Wait..
	0220	0024	GOSUB MESSAGE.ON
	0226	0024	
20	0226	0024	'rewrite directory deleting REANAME\$ as indicat
			ed by POINTERZ
	0226	0024	KILL "READIR.OLD"
	022D	0024	NAME "READIR.RJP" AS "READIR.OLD"
	0237	0024	OPEN "READIR.OLD" FOR INPUT AS #1
25	0248	0024	OPEN "READIR.RJP" FOR OUTPUT AS #2
	025A	0024	
	025A	0024	INPUT #1, REANUMZ
	026C	0026	REANUMZ = REANUMZ - 1
	0275	0026	WRITE #2,REANUMZ
30	0286	0026	
	0286	0026	IF REANUMZ = 0 THEN GOTO DIR.DONE
	0295	0026	FOR IZ = 1 TO REANUMZ + 1
	02A4	0028	INPUT #1,REANAME\$
	02B6	0028	IF IZ <> POINTERZ THEN PRINT #2,REANAME\$
35	02D3	002A	NEXT IZ
	02E5	002A	
	02E5	002A	DIR.DONE:
	02EA	002A	CLOSE #1:CLOSE #2
	02FB	002A	
40	02FB	002A	'remove data file
	02FB	002A	FILES\$ = RIGHTS(STR\$(POINTERZ),LEN(STR\$(POINTERZ))-1) +
			"REA.RJP"
	031C	002E	KILL FILES
	0323	002E	
45	0323	002E	'rename remaining data files to maintain linked
			list to directory
	0323	002E	WHILE (REANUMZ + 1) > POINTERZ
	0333	002E	SFILES\$ = RIGHTS(STR\$(POINTERZ+1),LEN(STR\$(POINT
			ERZ+1))-1) + "REA.RJP"
50	0359	0032	DFILES\$ = RIGHTS(STR\$(POINTERZ),LEN(STR\$(POINT
			ERZ))-1) + "REA.RJP"
	037D	0036	NAME SFILES\$ AS DFILES\$
	0387	0036	POINTERZ = POINTERZ + 1
	0390	0036	WEND
55	0393	0036	
	0393	0036	GOSUB MESSAGE.OFF
	0399	0036	REANAME\$ = SELNAME\$
	03A3	0036	GOSUB TJDA
	03A9	0036	GOSUB DISP.DIR

0 268 237
M 04 00 95

5

10

15

20

25

Reagent Jet Printer
Reagent Filing

PAGE 6
07-09-86
15:04:35

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
03AF	0036	RETURN	
03B3	0036		
03B3	0036	REM \$PAGE	

30

35

40

45

50

55

```

Offset  Data   Source Line      IBM Personal Computer BASIC Compiler V2.00

6
0383 0036  T32:  'copy reagent
0388 0036      TYPEI = 0
038F 0036      IF REANUMI = 80 THEN FLAGI = 3:GOSUB SHOW.ERROR:RETURN
03D8 0036      FUNCTS = "Copy"
10 03E5 0036      GOSUB GET.SOURCE
03EB 0036      IF LEN(NEANAMES) = 0 THEN RETURN
03FD 0036      GOSUB SEARCH
0403 0036      IF POINTERI = 0 THEN FLAGI = 1:GOSUB SHOW.ERROR:RETURN
041F 0036
15 041F 0036      GOSUB GET.NEW.NAME
0425 0036      IF LEN(NEANAMES) = 0 THEN RETURN
0437 003A      IF LEN(NEANAMES) > 15 THEN FLAGI = 2:GOSUB SHOW.ERROR:R
      ETURN
0457 003A
20 0457 003A      MESSAGE$ = "Copying " + REANAMES + " to " + NEANAMES +
      " Please wait..."
047C 003A      GOSUB MESSAGE.ON
0482 003A
0482 003A      'add new name at end of directory
25 0482 003A      KILL "READIR.OLD"
0489 003A      NAME "READIR.RJP" AS "READIR.OLD"
0493 003A      OPEN "READIR.OLD" FOR INPUT AS #1
04A4 003A      OPEN "READIR.RJP" FOR OUTPUT AS #2
04B6 003A
30 04B6 003A      INPUT #1, REANUMI
04CB 003A      REANUMI = REANUMI + 1
04D1 003A      WRITE #2,REANUMI
04E2 003A
04E2 003A      FOR I1 = 1 TO REANUMI - 1
35 04F1 003C          INPUT #1,TEMP$
0503 0040          PRINT #2,TEMP$
0513 0040      NEXT I1
0525 0040      PRINT #2,NEANAMES
0535 0040
40 0535 0040      CLOSE #1:CLOSE #2
0543 0040
0543 0040      'create copy of data file
0543 0040      FILES$ = RIGHTS(STR$(POINTERI),LEN(STR$(POINTERI))-1) +
      "REA.RJP"
45 0567 0040      NEWFILES$ = RIGHTS(STR$(REANUMI),LEN(STR$(REANUMI))-1) +
      "REA.RJP"
058B 0044
058B 0044      OPEN FILES$ FOR INPUT AS #1
059C 0044      OPEN NEWFILES$ FOR OUTPUT AS #2
50 05AE 0044
05AE 0044      INPUT #1,TEMP
05C0 0048      WRITE #2,TEMP: 'frequency
05D0 0048      INPUT #1,TEMP
05E2 0048      WRITE #2,TEMP: 'pulse width
55 05F2 0048      INPUT #1,TEMP
0604 0048      WRITE #2,TEMP: 'strobe delay
0614 0048      INPUT #1,TEMP
0626 0048      WRITE #2,TEMP: 'nozzle
0636 0048
  
```

0 268 237
M 04 08 95

5

10

15

20

Reagent Jet Printer
Reagent Filing

PAGE 8
07-09-86
15:04:35

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

25

0636 0048 INPUT #1,TEMP\$
0648 0048 PRINT #2,TEMP\$: 'concentration
0658 0048 INPUT #1,TEMP\$
066A 0048 PRINT #2,TEMP\$: 'density
067A 0048 INPUT #1,TEMP\$
068C 0048 PRINT #2,TEMP\$: 'viscosity

30

069C 0048
069C 0048 CLOSE #1:CLOSE #2
06AA 0048
06AA 0048 GOSUB MESSAGE.OFF
06B0 0048 GOSUB DISP.DIR
06B6 0048 RETURN
06BA 0048
06BA 0048 REM \$PAGE

35

40

45

50

55

M 04-08 95
0 268 237

5

Reagent Jet Printer
Reagent Filing

PAGE 9

07-09-86

15:04:35

10

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

15

20

25

30

35

40

45

50

55

```

06BA 004B TCC: 'rename reagent
06BF 004B TYPE1 = 0
06C6 004B FUNCT$ = 'Rename'
06D0 004B GOSUB GET.SOURCE
06D6 004B IF LEN(REANAME$) = 0 THEN RETURN
06EB 004B GOSUB SEARCH
06EE 004B IF POINTER1 = 0 THEN FLAG1 = 1:GOSUB SHOW.ERROR:RETURN
070A 004B
070A 004B GOSUB GET.NEW.NAME
0710 004B IF LEN(NEWNAME$) = 0 THEN RETURN
0722 004B IF LEN(NEWNAME$) > 15 THEN FLAG1 = 2:GOSUB SHOW.ERROR:R
      ETURN
0742 004B IF NEWNAME$ = REANAME$ THEN RETURN
0753 004B MESSAGE$ = "Renaming " + REANAME$ + " to " + NEWNAME$ +
      " Please wait..."
077A 004B GOSUB MESSAGE.ON
0780 004B
0790 004B 'renaming reagent name in directory
0780 004B KILL "READIR.OLD"
0787 004B NAME "READIR.RJP" AS "READIR.OLD"
0791 004B OPEN "READIR.OLD" FOR INPUT AS #1
07A2 004B OPEN "READIR.RJP" FOR OUTPUT AS #2
07B4 004B
07B4 004B INPUT #1, REANUM1
07C6 004B WRITE #2,REANUM1
07D7 004B
07D7 004B FOR I1 = 1 TO REANUM1
07E4 004B INPUT #1,TEMP$
07F6 004B IF I1 <> POINTER1 THEN PRINT #2,TEMP$
0813 004B IF I1 = POINTER1 THEN PRINT #2,NEWNAME$
0830 004B NEXT I1
0842 004B
0842 004B CLOSE #1:CLOSE #2
0850 004B
0850 004B GOSUB MESSAGE.OFF
0856 004B IF REANAME$ = SELNAME$ THEN REANAME$ = NEWNAME$:GOSUB T
      JDA
0875 004A GOSUB DISP.DIR
087B 004A RETURN
087F 004A
087F 004A REM $PAGE

```

0 268 237

5

10

Reagent Jet Printer
Reagent Filing

PAGE 10
07-09-85
15:04:35

15

Offset: Data Source Line IEN Personal Computer BASIC Compiler V2.00

20

```
067F 004A TJS: 'select reagent for printing
0684 004A      "YFEI = 0
0888 004A      FUNCT5 = "Select"
0895 004A      GOSUB GET.SOURCE
0898 004A      IF LEN(REANAMES) = 0 THEN RETURN
08A6 004A      IF REANAMES = SELNAMES THEN RETURN
08C3 004A      GOSUB T3DA
08C6 004A      GOSUB DISP.DIR
08CC 004A      RETURN
```

25

```
08D0 004A      T3DA:
08D0 004A      GOSUB SEARCH
08DB 004A      IF POINTER1 = 0 THEN FLAG1 = 1:GOSUB SHOW.ERROR:RETURN
08F7 004A
```

30

```
08F7 004A      MESSAGE1 = "Selecting " + REANAMES + "      Please Wait.
..
090E 004A      GOSUB MESSAGE.ON
0914 004A
0914 004A
```

35

```
'change entrys in reagent default file READEF.R
JP
0914 004A      OPEN "READEF.RJP" FOR OUTPUT AS #1
0926 004A      FILES = RIGHTS(STR$(POINTER1),LEN(STR$(POINTER1))-1) +
"REA.RJP"
```

40

```
094A 004A      PRINT #1,FILES
094A 004A      PRINT #1,REANAMES
095A 004A
096A 004A      CLOSE #1
0971 004A      GOSUB MESSAGE.OFF
0977 004A      RETURN
```

45

```
097B 004A      TJE: 'exit reagent filing
097B 004A      RETURN
0980 004A
0984 004A
```

50

```
0984 004A      REN $PAGE
```

55



0 268 237

Reagent Get Premier
Reagent Filing

PAGE 11
07-09-86
15:04:33

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

6      0984 004A SEARCH:
      0989 004A POINTER1 = 0
      0990 004A CFEN "READIR.RJP" FOR INPUT AS #1
      09A1 004A INPUT #1,REANUM1: ' get number of reagents in direc
10      tory
      09B3 004A IF REANUM1 = 0 THEN CLOSE #1:RETURN
      09C9 004A TEMP$ = ""
      09D3 004A WHILE (POINTER1 < REANUM1) AND (REANAME$ <> TEMP$)
      09FB 004A LINE INPUT #1,TEMP$
      0A06 004A POINTER1 = POINTER1 + 1
15      0A11 004A WEND
      0A14 004A IF REANAME$ <> TEMP$ THEN POINTER1 = 0
      0A2A 004A CLOSE #1
      0A31 004A RETURN
20      0A33 004A
      0A35 004A GET.SOURCE:
      0A3A 004A LOCATE 25,1:COLOR 15,0:PRINT "Enter Reagent Name to 'FU
      NCT$ " ";
      0A6C 004A LINE INPUT;"",REANAME$
      0A7A 004A LOCATE 25,1:PRINT SPACES(79);
      0A77 004A RETURN
      0A9B 004A
      0A9B 004A GET.NEW.NAME:
      0AA0 004A LOCATE 25,1:COLOR 15,0:PRINT "Enter New Reagent Name ";
      0AC6 004A LINE INPUT;"",NEWNAME$
      0AD4 004A LOCATE 25,1:PRINT SPACES(79);
      0AF1 004A RETURN
      0AF5 004A
      0AF5 004A DISP.DIR: 'display reagent directory in 4 columns of 20 r
35      cws
      0AFA 004A 'read selected reagent into SELNAME$
      0AFA 004A OPEN "READIR.RJP" FOR INPUT AS #1
      0B03 004A INPUT #1,SELNAME$: 'read and discard data file nam
40      e
      0B1D 004A INPUT #1,SELNAME$: 'read and save reagent name
      0B2F 004A CLOSE #1
      0B36 004A
      0B36 004A OPEN "READIR.RJP" FOR INPUT AS #1
      0B47 004A INPUT #1,REANUM1: ' read number of reagents
45      0B59 004A MESSAGE$ = "Reading Reagent Directory Please Wait"
      0B63 004A GOSUB MESSAGE.ON
      0B69 004A FLAG1 = 0
      0B70 004A TEMP1 = REANUM1 - 1:IF REANUM1 < 80 THEN TEMP1 = REANUM
50      1
      0BBB 004C FOR I1 = 0 TO TEMP1
      0B97 004E LOCATE (I1 MOD 20)+1,(INT(I1/20)+20)+1
      0BCA 004E PRINT SPACES(18);
      0BDA 004E NEXT I1
      0BEC 004E
55      0BEC 004E FOR I1 = 0 TO REANUM1 - 1
      0BFA 0050 INPUT #1,REANAME$
      0C0C 0050 LOCATE (I1 MOD 20)+1,(INT(I1/20)+20)+3
      0C3F 0050 PRINT REANAME$;
      0C4C 0050 IF REANAME$ = SELNAME$ THEN LOCATE (I1 MOD 20)+

```

```

5      1,(INT((I7/20)+20)+1:PRINT "+";
      0C9B 0050      NEXT I2
      0CB0 0050      CLOSE #1
      0CB7 0050      GOSUB MESSAGE.OFF
10     0CB0 0050      RETURN
      0CC1 0050
      0CC1 0050      INITIALIZE:
      0CC6 0050      DIM MENU$(4,1)
      0CC7 0078      MENU$(0,0) = "Delete"
15     0CCF 0078      MENU$(0,1) = "Remove a reagent file from the directory"
      0CFA 0078      MENU$(1,0) = "Copy"
      0D15 0078      MENU$(1,1) = "Copy a reagent file to a new reagent name

      0D2E 0078      MENU$(2,0) = "Rename"
20     0D4B 0078      MENU$(2,1) = "Rename a reagent file in the directory"
      0D69 0078      MENU$(3,0) = "Select"
      0D84 0078      MENU$(3,1) = "Select a reagent file to be printed"
      0DA0 0078      MENU$(4,0) = "Exit"
      0DBB 0078      MENU$(4,1) = "Return to the main menu"

25     0DD7 0078
      0DD7 0078      COLOR 9,0:CLS
      0DEA 0078      LOCATE 21,1
      0DF7 0078      FOR I2 = 1 TO 80
      0DFE 0078          PRINT "D";
30     0E0B 0078      NEXT I2
      0E1B 0078
      0E1B 0078      FOR MENU% = 0 TO 4
      0E21 0078          GOSUB MENU.OFF
      0E27 0078      NEXT MENU%
35     0E37 0078
      0E37 0078      GOSUB DISP.DIR
      0E3D 0078      IF FLAG% > 0 THEN GOSUB SHOW.ERROR
      0E4E 0078      MENU% = 4
      0E53 0078      GOSUB MENU.ON
40     0E5B 0078
      0E5B 0078      RETURN
      0E5F 0078
      0E5F 0078      KEY.MENU:
45     0E64 0078          GOSUB MENU.OFF
      0E6A 0078          MENU% = MENU% + DIFF%
      0E76 0078          GOSUB MENU.ON
      0E7C 0078          RETURN
      0E80 0078
      0E80 0078      MENU.DR:
50     0E85 0078          LOCATE 22,(MENU%+10)+18
      0E9C 0078          COLOR 0,7
      0EAB 0078          PRINT MENU$(MENU%,0);
      0EC6 0078          LOCATE 25,40-LEN(MENU$(MENU%,1))/2
      0EFA 0078          COLOR 7,0
55     0F06 0078          PRINT MENU$(MENU%,1);
      0F25 0078          RETURN
      0F29 0078
      0F29 0078      MENU.OFF:
      0F2E 0078          LOCATE 22,(MENU%+10)+18

```

02680237

Reagent Jet Printer
Reagent Filing

PAGE 13
07-09-86
15:04:33

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

5
    OF45 0078      COLOR 14,0
    OF51 0078      PRINT MENU$(MENU$,0);
    OF6F 0078      LOCATE 25,40-LEN(MENU$(MENU$,1))/2
    OFA3 0078      PRINT SPACES(LEN(MENU$(MENU$,1)));
10    OFC8 0078      RETURN
    OFCC 0078
    OFCC 0078      SHOW.ERROR:
    OFD1 0078      ON FLAG% GOSUB ER1, ER2, ER3, ER4
    OFE2 0078      ERRMSG$ = ERR$ + " Strike any key.."
15    OFF2 0080      LOCATE 24,40-LEN(ERRMSG$)/2
    1014 0080      COLOR 13,0
    1020 0080      PRINT ERRMSG$;
    102D 0080      AS = ""
    1037 0080      WHILE AS = ""
20    1046 0080          AS = INKEY$
    1050 0080      WEND
    1053 0080      GOSUB MESSAGE.OFF
    1059 0080      RETURN
    105D 0080
25    105D 0080      ER1:
    1062 0080          ERR$ = REANAMES + " Not Found in the Directory"
    1072 0080          RETURN
    1076 0080
    1076 0080      ER2:
30    107B 0080          ERR$ = "Reagent Name is too Long (15 characters max.)"
    1085 0080          RETURN
    1089 0080
    1089 0080      ER3:
    108E 0080          ERR$ = "Directory is full (60 reagents max.)"
35    1098 0080          RETURN
    109C 0080
    109C 0080      ER4:
    10A1 0080          ERR$ = "Cannot Modify SELECTd reagent Name"
    10AB 0080          RETURN
40    10AF 0080
    10AF 0080      MESSAGE.ON:
    10B4 0080          LOCATE 24,38 - LEN(MESSAGE$) / 2:COLOR 11,0:PRINT MESSA
    10EF 0080      GE$;
    10F3 0080      RETURN
45    10F3 0080
    10F3 0080      MESSAGE.OFF:
    10FB 0080          LOCATE 24,1:COLOR 15,0:PRINT SPACES(79);
    1121 0080          RETURN
50    1125 0080
    1125 0080      END SUB
    112C 0080
    16C9 0080

55    50426 Bytes Available
    45718 Bytes Free

```

0 Warning Error(s)
0 Severe Error(s)

Reagent Jet Printer
Pattern Filing

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
0030	0006	REM \$TITLE:'Reagent Jet Printer \$SUBTITLE:'Pattern Filing'
0030	0006	*MODULE - 'PATFILE' File Handling for patterns
0030	0006	*
0030	0006	*AUTHOR - K. A. Enevold
0030	0006	*
0030	0006	*COPYRIGHT (C) 1985 ABBOTT LABORATORIES
0030	0006	*
0030	0006	*REVISION - 1.0 02-12-86 NAE Creation of initial code
0030	0006	*
0030	0006	*SYSTEM - This code can only be compiled by the BASCOM
0030	0006	* COMPILER, it will not run under the INTERPRETER!!
0030	0006	*
0030	0006	*DESCRIPTION:
0030	0006	* This module allow file handling for patterns. When inv
0030	0006	oked, it displays
0030	0006	* the current contents of the pattern directory in 4 colu
0030	0006	ms of 20 entries
0030	0006	* each. The pattern which is currently selected for prin
0030	0006	ting is marked by
0030	0006	* an asterisk to the left of the pattern name. After the
0030	0006	directory is listed
0030	0006	* the user is presented with 5 menu choices. The left an
0030	0006	d right arrows are
0030	0006	* used to highlight menu items and the enter key is used
0030	0006	to invoke action.
0030	0006	* The menu choices and their actions are:
0030	0006	*
0030	0006	* DELETE - Remove a pattern file from the directo
0030	0006	ry
0030	0006	* COPY - Copy a pattern file to a new pattern n
0030	0006	ame, saving the old pattern
0030	0006	* RENAME - Change the name of the pattern without
0030	0006	changing the pattern itself
0030	0006	* SELECT - Select a pattern for printing
0030	0006	* EXIT - Return to the main menu
0030	0006	*
0030	0006	*DATA DICTIONARY
0030	0006	* TYPE% Which type of valid key was pushed
0030	0006	* MENU% Which menu item is being pointer to (0-4)
0030	0006	* DIFF% Distance to move MENU% at left or right arro
0030	0006	*
0030	0006	* FLAG% Error type 0-4
0030	0006	* POINTER% Position of PATNAME% in directory list
0030	0006	* PATNUM% Number of pattern names in directory
0030	0006	list
0030	0006	* ELNUM% Number of elements in a pattern file
0030	0006	* TEMP% Storage for integers during pattern copy
0030	0006	* I% Counter used during pattern copy
0030	0006	* J% Counter used during pattern copy
0030	0006	* AS Misc. input string
0030	0006	* FUNCT% Printed at bottom of screen during prompt fo
0030	0006	r pattern name
0030	0006	* PATNAME% Pattern name currently being worked on
0030	0006	* SELNAME% Pattern name currently selected for printing

0268237

Reagent Jet Printer
Pattern Filing

PAGE 2
07-09-86
15:11:46

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
0030	0006	FILES	Filename of pattern data file
0030	0006	SFILES	Filename for source pattern data file used during copy
0030	0006	DFILES	Filename for destination pattern data file used during copy
0030	0006	NEWNAMES	New pattern name for COPY and RENAME
0030	0006	TEMP	Pattern names are held here as the directory is being re-written
0030	0006	NEWFILES	Destination filename used while copying pattern data files
0030	0006	MESSAGES	A message printed at the bottom of the screen
0030	0006	MESS(4,1)	Array of strings containing the short and long menu names
0030	0006	ERRMSG	Message printed when any error occurs
0030	0006	ERR	Appended to ERRMSG to indicate nature of error
0030	0006	TEMP	Storage of real variables while copying pattern data files
0030	0006	REM SPAGE	

Reagent Jet Printer
Pattern Filing

PAGE 3
07-09-86
15:11:46

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
0030	0006	SUB PATTERN.FILE STATIC	
0047	0006	GO SUB INITIALIZE	
0040	0006	TYPE1 = 0	
0054	0008	WHILE TYPE1 <> 3	
005F	0008	AS = ""	
0069	000C	WHILE AS = ""	
0078	000C	AS = INKEY\$	
0082	000C	WEND	
0085	000C	IF AS = CHR\$(0) + CHR\$(75) THEN TYPE1 = 1:	
00AA	000C	'left arrow	
00CF	000C	IF AS = CHR\$(0) + CHR\$(77) THEN TYPE1 = 2:	
00CF	000C	'right arrow	
00CF	000C	IF AS = CHR\$(13) THEN TYPE1 = 3:	
00E9	000C	'(cr) to execute selection	
00E9	000C	ON TYPE1 GO SUB T1, T2, T3	
00FB	000C	WEND	
00FC	000C	EXIT SUB	
00FC	000C	EXIT SUB	
0100	000C	REM SPAGE	

0 268 237
M 04-08-86

6

10

15

Reagent Jet Printer
Pattern Filing

PAGE 4
07-09-86
15:11:46

20

Offset Data Source Line IEN Personal Computer BASIC Compiler V2.00

25

35

40

45

50

55

```

0100 000C ***** SUB-ROUTINES FOR THIS MODULE *****
0100 000C
0100 000C T1:      'left arrow
25 0105 000C      TYPEZ = 0
010C 000C      IF MENUZ = 0 THEN RETURN
0118 000C      DIFFZ = -1
0122 0010      GOSUB NEW.MENU
0128 0010      RETURN
30 012C 0010
012C 0010 T2:      'right arrow
0131 0010      TYPEZ = 0
0138 0010      IF MENUZ = 4 THEN RETURN
0147 0010      DIFFZ = 1
35 014E 0010      GOSUB NEW.MENU
0154 0010      RETURN
0158 0010
0158 0010 T3:      '<cr> (execute selected menu item)
015D 0010      LOCATE 25,1:PRINT SPACES(79);
40 017A 0010      ON MENUZ + 1 GOSUB T3A, T3B, T3C, T3D, T3E
018F 0010      GOSUB MENU.ON
0195 0010      RETURN
0199 0010
45 0199 0010      REK SPAGE

```


Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

6
0159 0010 T3A:      delete pattern
015E 0010       TYPE1 = 0
01A5 0010       FLAG1 = "Delete"
01AF 0014       GOSUB GET.SOURCE
10 01B5 0014       IF LEN(PATNAME1) = 0 THEN RETURN
01C7 0018       IF PATNAME1 = SELNAME1 THEN FLAG1 = 4:GOSUB SHOW.ERROR:
      RETURN
01E7 001E       GOSUB SEARCH
01ED 001E       IF POINTERR = 0 THEN FLAG1 = 1:GOSUB SHOW.ERROR:RETURN
15 0209 0020
0209 0020       MESSAGE1 = "Deleting " + PATNAME1 + "      Please Wait..

0220 0024       GOSUB MESSAGE.ON
0226 0024
20 0226 0024       'rewrite directory deleting PATNAME1 as indicat
      ed by POINTERR
0226 0024       KILL "PATDIR.OLD"
022D 0024       NAME "PATDIR.RJP" AS "PATDIR.OLD"
0237 0024       OPEN "PATDIR.OLD" FOR INPUT AS #1
25 0248 0024       OPEN "PATDIR.RJP" FOR OUTPUT AS #2
025A 0024
025A 0024       INPUT #1, PATNUM1
026C 0026       PATNUM1 = PATNUM1 - 1
0275 0026       WRITE #2,PATNUM1
30 0286 0026
0286 0026       IF PATNUM1 = 0 THEN GOTO DIR.DONE
0295 0026       FOR IZ = 1 TO PATNUM1 + 1
02A4 0028           INPUT #1,PATNAME1
02B6 0028           IF IZ < POINTERR THEN PRINT #2,PATNAME1
35 02D3 002A       NEXT IZ
02E5 002A
02E5 002A       DIR.DONE:
02EA 002A           CLOSE #1:CLOSE #2
02FB 002A
40 02FB 002A       'resolve data file
02FB 002A       FILES = RIGHTS(STR$(POINTERR),LEN(STR$(POINTERR))-1) +
      "PAT.RJP"
031C 002E       KILL FILES
0373 002E
45 0373 002E       'rename remaining data files to maintain linked
      list with directory
0373 002E       WHILE (PATNUM1 + 1) > POINTERR
0373 002E           SFILES = RIGHTS(STR$(POINTERR+1),LEN(STR$(POINT
      ERR+1))-1) + "PAT.RJP"
0359 0032           DFILES = RIGHTS(STR$(POINTERR),LEN(STR$(POINTERR
      ))-1) + "PAT.RJP"
50 037D 0036       NAME SFILES AS DFILES
0387 0036       POINTERR = POINTERR + 1
039C 0036       WEND
55 0393 0036
0393 0036       GOSUB MESSAGE.OFF
0399 0036       PATNAME1 = SELNAME1
03A3 0036       GOSUB T3DA
03A9 0036       GOSUB DISP.DIR

```

0-268-237
M 04-08-95

5

10

15

20

25

Reagent Jet Printer
Pattern Filing

PAGE 6
07-09-86
15:11:46

30

Offset	Data	Source Line	IBM Personal Computer BASIC Compiler V2.00
03AF	0036	RETURN	
03B3	0036		
03B3	0036	REM \$PAGE	

35

40

45

50

55

0 268 237

04-00-00

Reagent Jet Printer
Pattern Filing

PAGE 7
07-09-86
15:11:46

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

5      03B3 0036 FCB: 'copy pattern
      03B2 0036 TYPEI = 0
      03BF 0036 IF PATNUM1 = 80 THEN FLAG1 = 3:GOSUB SHOW.ERROR:RETURN
      03DE 0036 FUNCTS = "Copy"
10     03E3 0036 GOSUB GET.SOURCE
      03E3 0036 IF LEN(PATNAMES) = 0 THEN RETURN
      03F3 0036 GOSUB SEARCH
      0403 0036 IF POINTER1 = 0 THEN FLAG1 = 1:GOSUB SHOW.ERROR:RETURN
      041F 0036
15     041F 0036 GOSUB GET.NEW.NAME
      0425 0036 IF LEN(NEWNAMES) = 0 THEN RETURN
      0437 0036 IF LEN(NEWNAMES) > 15 THEN FLAG1 = 2:GOSUB SHOW.ERROR:R
      RETURN
20     0457 003A
      0457 003A MESSAGES = "Copying " + PATNAMES + " to " + NEWNAMES +
      " Please wait.."
      047C 003A GOSUB MESSAGE.GM
      0482 003A
25     0482 003A 'add NEWNAMES at end of directory
      0482 003A KILL "PATDIR.OLD"
      0489 003A MAKE "PATDIR.RJP" AS "PATDIR.OLD"
      0493 003A OPEN "PATDIR.OLD" FOR INPUT AS #1
      04A4 003A OPEN "PATDIR.RJP" FOR OUTPUT AS #2
      04B6 003A
30     04B6 003A INPUT #1, PATNUM1
      04C8 003A PATNUM1 = PATNUM1 + 1
      04D1 003A WRITE #2, PATNUM1
      04E2 003A
      04E2 003A FOR I1 = 1 TO PATNUM1 - 1
35     04F1 003C INPUT #1, TEMP1
      0503 0040 PRINT #2, TEMP1
      0513 0040 NEXT I1
      0525 0040 PRINT #2, NEWNAMES
      0535 0040
40     0535 0040 CLOSE #1:CLOSE #2
      0543 0040
      0543 0040 'create copy of pattern data file
      0543 0040 FILES = RIGHTS(STR$(POINTER1), LEN(STR$(POINTER1))-1) +
45     "PAT.RJP"
      0567 0040 NEWFILES = RIGHTS(STR$(PATNUM1), LEN(STR$(PATNUM1))-1) +
      "PAT.RJP"
      058B 0044
      058B 0044 OPEN FILES FOR INPUT AS #1
      059C 0044 OPEN NEWFILES FOR OUTPUT AS #2
50     05AE 0044
      05AE 0044 INPUT #1, ELNUM1
      05C0 0046 WRITE #2, ELNUM1
      05D1 0046
      05D1 0046 FOR I1 = 1 TO 4
55     05DB 0046 INPUT #1, TEMP
      05EA 004A WRITE #2, TEMP
      05FA 004A NEXT I1
      060A 004A
      060A 004A FOR I1 = 1 TO ELNUM1

```

Reagent Jet Printer
Pattern Filing

0288 237

PAGE 8
07-09-86
15:11:46

```
Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00
5
0617 004C FOR J2 = 1 TO 6
061E 004C INPUT #1,TEMP1
0630 004E WRITE #2,TEMP1
0641 004E NEXT J2
10
0651 0050 NEXT I2
0663 0050
0663 0050 CLOSE #1:CLOSE #2
0671 0050
0671 0050 GOSUB MESSAGE.OFF
15
0677 0050 GOSUB DISP.DIR
067D 0050 RETURN
0681 0050
0681 0050 TJC: 'rename pattern
0686 0050 TYPEZ = 0
068D 0050 FUNCTS = 'Rename'
20
0697 0050 GOSUB GET.SOURCE
069D 0050 IF LEN(PATNAME$) = 0 THEN RETURN
06AF 0050 GOSUB SEARCH
06B5 0050 IF POINTER1 = 0 THEN FLAG1 = 1:GOSUB SHOW.ERROR:RETURN
25
06D1 0050
06D1 0050 GOSUB GET.NEW.NAME
06D7 0050 IF LEN(NEWNAME$) = 0 THEN RETURN
06E9 0050 IF LEN(NEWNAME$) > 15 THEN FLAG1 = 2:GOSUB SHOW.ERROR:R
ETURN
30
0709 0050 IF NEWNAME$ = PATNAME$ THEN RETURN
071C 0050
071C 0050 MESSAGE$ = 'Renaming ' + PATNAME$ + ' to ' + NEWNAME$ +
' Please wait...'
0741 0050 GOSUB MESSAGE.CX
35
0747 0050
0747 0050 'change pattern name in directory replacing PAT
NAME$ with NEWNAME$
0747 0050 KILL "PATDIR.OLD"
074E 0050 NAME "PATDIR.RJP" AS "PATDIR.OLD"
40
0756 0050 OPEN "PATDIR.OLD" FOR INPUT AS #1
0769 0050 OPEN "PATDIR.RJP" FOR OUTPUT AS #2
0776 0050
077B 0050 INPUT #1, PATNUM1
078D 0050 WRITE #2,PATNUM1
45
079E 0050
079E 0050 FOR I2 = 1 TO PATNUM1
07AB 0052 INPUT #1,TEMP$
07BD 0052 IF I2 <> POINTER1 THEN PRINT #2,TEMP$
07DA 0052 IF I2 = POINTER1 THEN PRINT #2,NEWNAME$
50
07F7 0052 NEXT I2
0809 0052
0809 0052 CLOSE #1:CLOSE #2
0817 0052
0817 0052 GOSUB MESSAGE.OFF
55
081D 0052
081D 0052 'select new pattern name if necessary
081D 0052 IF PATNAME$ = SELNAME$ THEN PATNAME$ = NEWNAME$:GOSUB T
3DA
083C 0052 GOSUB DISP.DIR
```

0 268 237
M 04-08-86

Reagent Jet Printer
Pattern Filing

PAGE 9
07-09-86
15:11:46

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

0842 0052 RETURN
0846 0052
0846 0052 REM \$PAGE

Reagent Jet Printer
Pattern Filing

PAGE 10
07-09-86
15:11:46

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

0846 0052 TJD: 'select pattern for printing
0848 0052 TYPEZ = 0
0852 0052 FUNCT\$ = 'Select'
085C 0052 GOSUB GET.SOURCE
0862 0052 IF LEN(PATNAME\$) = 0 THEN RETURN
0874 0052 IF PATNAME\$ = SELNAME\$ THEN RETURN
0887 0052 GOSUB T3DA
088D 0052 GOSUB DISP.DIR
0893 0052 RETURN
0897 0052
0897 0052 T3DA:
089C 0052 GOSUB SEARCH
08A2 0052 IF POINTERZ = 0 THEN FLAGZ = 1:GOSUB SHOW.ERROR:RETURN
08BE 0052
08BE 0052 MESSAGE\$ = 'Selecting ' + PATNAME\$ + ' Please Wait.
..*
08D5 0052 GOSUB MESSAGE.ON
08DB 0052
08DB 0052 'change entries in pattern default file PATDEF.R
JP
08DB 0052 OPEN 'PATDEF.RJP' FOR OUTPUT AS #1
08ED 0052 FILE\$ = RIGHT\$(STR\$(POINTERZ),LEN(STR\$(POINTERZ))-1) +
"PAT.RJP"
0911 0052
0911 0052 PRINT #1,FILE\$
0921 0052 PRINT #1,PATNAME\$
0931 0052
0931 0052 CLOSE #1
0938 0052 GOSUB MESSAGE.CFF
093E 0052 RETURN
0942 0052
0942 0052 T3E: 'exit pattern filing
0947 0052 RETURN
094B 0052
094B 0052 REM \$PAGE

Reagent Jet Printer
Pattern Filing

PAGE 11

07-09-86

15:11:46

IBM Personal Computer BASIC Compiler V2.00

```

5      0948 0052 SEARCH:
      0950 0052 POINTERR = 0
      0957 0052 OPEN "PATDIR.RJP" FOR INPUT AS #1
      0968 0052 INPUT #1,PATNUMI:  get number of patterns in direc
10      lory
      097A 0052 IF PATNUMI = 0 THEN CLOSE #1:RETURN
      0990 0052 TEMPS = ""
      099A 0052 WHILE (POINTERR < PATNUMI) AND (PATNAME$ <> TEMPS)
      09C2 0052 LINE INPUT #1,TEMPS
      09CF 0052 POINTERR = POINTERR + 1
15      09DB 0052 WEND
      09DB 0052 IF PATNAME$ <> TEMPS THEN POINTERR = 0
      09F1 0052 CLOSE #1
      09FB 0052 RETURN
20      09FC 0052
      09FC 0052 SET.SOURCE:
      0A01 0052 LOCATE 25,1:COLOR 15,0:PRINT "Enter Pattern Name to 'FU
      NCTS" ";
      0A33 0052 LINE INPUT: "",PATNAME$
      0A41 0052 LOCATE 25,1:PRINT SPACES(79);
      0A5E 0052 RETURN
      0A62 0052
      0A62 0052 SET.NEW.NAME:
      0A67 0052 LOCATE 25,1:COLOR 15,0:PRINT "Enter New Pattern Name ";
      0ABD 0052 LINE INPUT: "",NEWNAME$
      0A9B 0052 LOCATE 25,1:PRINT SPACES(79);
      0ABB 0052 RETURN
      0ABC 0052
      0ABC 0052 DISP.DIR:  'display directory in 4 columns, 20 rows
      0AC1 0052 'read default pattern name into SELNAME$
      0AC1 0052 OPEN "PATDEF.RJP" FOR INPUT AS #1
      0AD2 0052 INPUT #1,SELNAME$:  'discard data file name
      0AE4 0052 INPUT #1,SELNAME$
      0AF6 0052 CLOSE #1
40      0AFD 0052
      0AFD 0052 OPEN "PATDIR.RJP" FOR INPUT AS #1
      0B0E 0052 INPUT #1,PATNUMI:  read number of patterns
      0B20 0052
      0B20 0052 MESSAGE$ = "Reading Pattern Directory Please Wait"
      0B2A 0052 GOSUB MESSAGE.ON
      0B30 0052 FLAG1 = 0
      0B37 0052 TEMPI = PATNUMI - 1:IF PATNUMI < 80 THEN TEMPI = PATNUM
50      I
      0B52 0052 FOR IZ = 0 TO TEMPI
      0B5E 0054 LOCATE (IZ MOD 20)+1,(INT(IZ/20)+20)+1
      0B91 0054 PRINT SPACES(18);
      0BA1 0054 NEXT IZ
      0BB3 0054
      0BB3 0054 FOR IZ = 0 TO PATNUMI - 1
      0BC1 0056 INPUT #1,PATNAME$
      0BD3 0056 LOCATE (IZ MOD 20)+1,(INT(IZ/20)+20)+3
      0C06 0056 PRINT PATNAME$;
      0C13 0056 IF PATNAME$ = SELNAME$ THEN LOCATE (IZ MOD 20)+
1,(INT(IZ/20)+20)+1:PRINT "*";

```

Reagent Jet Printer
Pattern Filing

PAGE 12

07-09-86

15:11:46

IBM Personal Computer BASIC Compiler V2.00

```

5      0C62 0056      NEXT I%
      0C77 0056      CLOSE #1
      0C7E 0056      GOSUB MESSAGE.OFF
      0C84 0056      RETURN
10     0C86 0056
      0C88 0056      INITIALIZE:
      0C8D 0056          DIM MENU$(4,1)
      0C9E 007E          MENU$(0,0) = "Delete"
      0CA6 007E          MENU$(0,1) = "Remove a pattern file from the directory"
15     0CC1 007E          MENU$(1,0) = "Copy"
      0CDC 007E          MENU$(1,1) = "Copy a pattern file to a new pattern name"

      0CF5 007E          MENU$(2,0) = "Rename"
      0D12 007E          MENU$(2,1) = "Rename a pattern file in the directory"
20     0D30 007E          MENU$(3,0) = "Select"
      0D4B 007E          MENU$(3,1) = "Select a pattern file to be printed"
      0D67 007E          MENU$(4,0) = "Exit"
      0D82 007E          MENU$(4,1) = "Return to the main menu"
      0D9E 007E
25     0D9E 007E          COLOR 9,0:CLS
      0DB1 007E          LOCATE 21,1
      0DBE 007E          FOR I% = 1 TO 80
      0DC5 007E              PRINT "D";
      0DD2 007E          NEXT I%
30     0DE2 007E
      0DE2 007E          FOR MENU% = 0 TO 4
      0DEB 007E              GOSUB MENU.OFF
      0DEE 007E          NEXT MENU%
      0DFE 007E
35     0DFE 007E          GOSUB DISP.DIR
      0E04 007E          IF FLAG% > 0 THEN GOSUB SHOW.ERROR
      0E15 007E          MENU% = 4
      0E1C 007E          GOSUB MENU.ON
      0E22 007E
40     0E22 007E          RETURN
      0E26 007E
      0E26 007E      NEW.MENU:
      0E2B 007E          GOSUB MENU.OFF
      0E31 007E          MENU% = MENU% + DIFF%
45     0E3D 007E          GOSUB MENU.ON
      0E43 007E          RETURN
      0E47 007E
      0E47 007E      MENU.ON:
      0E4C 007E          LOCATE 22,(MENU%+10)+18
50     0E63 007E          COLOR 0,7
      0E6F 007E          PRINT MENU$(MENU%,0);
      0EBD 007E          LOCATE 25,40-LEN(MENU$(MENU%,1))/2
      0EC1 007E          COLOR 7,0
      0EC9 007E          PRINT MENU$(MENU%,1);
55     0EEC 007E          RETURN
      0EF0 007E
      0EF0 007E      MENU.OFF:
      0EF5 007E          LOCATE 22,(MENU%+10)+18
      0F0C 007E          COLOR 14,0

```

0208 237 00 00 00

Reagent Jet Printer
Pattern Filing

PAGE 13
07-09-86
15:11:46

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

5      0F18 007E      PRINT MENU$(MENUZ,0);
      0F36 007E      LOCATE 25,40-LEN(MENU$(MENUZ,1))/2
      0F64 007E      PRINT SPACES(LEN(MENU$(MENUZ,1)));
      0FBF 007E      RETURN
10     0F93 007E
      0F93 007E      SHOW.ERROR:
      0F98 007E      ON FLAG% GOSUB ER1, ER2, ER3, ER4
      0FA9 007E      ERRMSG$ = ERR$ + " Strike any key.."
      0FB9 0086      LOCATE 24,40-LEN(ERRMSG$)/2
15     0FDB 0086      COLOR 13,0
      0FE7 0086      PRINT ERRMSG$;
      0FF4 0086      AS = ""
      0FFE 0086      WHILE AS = ""
20     100D 0086      AS = INKEY$
      1017 0066      WEND
      101A 0086      GOSUB MESSAGE.OFF
      1020 0086      RETURN
      1024 0086
      1024 0086      ER1:
25     1029 0086      ERR$ = PATHNAME$ + " Not Found in the Directory"
      1039 0086      RETURN
      103D 0086
      103D 0086      ER2:
30     1042 0086      ERR$ = "Pattern Name is too Long (15 characters max.)"
      104C 0086      RETURN
      1050 0086
      1050 0086      ER3:
      1055 0086      ERR$ = "Directory is Full (80 patterns max.)"
      105F 0086      RETURN
35     1063 0086
      1063 0086      ER4:
      1068 0086      ERR$ = "Cannot Modify SELECTd pattern Name"
      1072 0086      RETURN
      1076 0086
40     1076 0086      MESSAGE.ON:
      1078 0086      LOCATE 24,38 - LEN(MESSAGE$) / 2:COLOR 11,0:PRINT MESSA
      GE$;
      1086 0086      RETURN
      108A 0086
45     108A 0086
      108A 0086      MESSAGE.OFF:
      108F 0086      LOCATE 24,1:COLOR 15,0:PRINT SPACES(79);
      10EB 0086      RETURN
      10EC 0086
50     10EC 0086      END SUB
      10F3 0086
      1688 0086

```

30426 Bytes Available
45670 Bytes Free

0 Warning Error(s)
0 Severe Error(s)

Reagent Jet Printer
Main Line Code

PAGE - 1
07-09-86
15:27:04

IBM Personal Computer BASIC Compiler V2.00

Offset	Data	Source Line
0030	0006	REM \$TITLE: 'Reagent Jet Printer' \$SUBTITLE: 'Main Line Code'
0030	0006	
0030	0006	'MODULE - 'MAIN'
0030	0006	
0030	0006	'AUTHOR - W. A. Enevold
0030	0006	
0030	0006	'COPYRIGHT (C) 1986 ABBOTT LABORATORIES
0030	0006	
0030	0006	'REVISION - 1.1 02-19-86 NAE Add notes and revise TYPEX resetin
0030	0006	9 - 1.0 02-14-86 NAE Creation of initial code
0030	0006	
0030	0006	'SYSTEM - This code can only be compiled by the BASCOM
0030	0006	COMPILER, it will not run under the INTERPRETER!!
0030	0006	
0030	0006	'DESCRIPTION
0030	0006	This is the main controlling module for the Reagent Jet
0030	0006	Printer.
0030	0006	It displays a menu in table form that allows 6 function
0030	0006	s to be
0030	0006	selected. PATTERN DEFINITION allows the user to define
0030	0006	patterns
0030	0006	to be printed. PATTERN FILING lets the user delete, co
0030	0006	py, rename
0030	0006	and select patterns for printing. REAGENT CALIBRATION
0030	0006	permits setting
0030	0006	of operation parameters for different reagents. REAGEN
0030	0006	T FILING is
0030	0006	the same as pattern filing. PRINTING PRINT prints the
0030	0006	selected
0030	0006	pattern with the selected reagent. SYSTEM EXIT TO DOS
0030	0006	ends the session.
0030	0006	Using up and down arrow keys let the user move through
0030	0006	the menu and
0030	0006	the Enter (cr) key activates the selection.
0030	0006	
0030	0006	'DATA DICTIONARY
0030	0006	' MENUZ This value represents the current menu
0030	0006	item (0-5)
0030	0006	' MENUZ(5,1) String array for displaying menu items.
0030	0006	6 rows by 2 columns
0030	0006	Each row corresponds to a menu item (0-
0030	0006	5)
0030	0006	First column is short menu name in high
0030	0006	lighted area
0030	0006	Second column is long description displ
0030	0006	ayed at menu bottom
0030	0006	' ROWZ(5) This array stores to row in which the s
0030	0006	hort menu name will be displayed
0030	0006	' DIFFZ This value is used to change MENUZ in r
0030	0006	esponse to arrow keys
0030	0006	' TYPEZ This value is set based on which valid
0030	0006	key is pressed
0030	0006	0 = No valid key. 1 = Up Arrow. 2 = D

0.268 237

Reagent Jet Printer
Main Line Code

PAGE 2
07-09-86
15:27:04

5

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

10

15

20

```

own Arrow. 3 = (cr).
0030 0006 '      TYPE1      Used to store MENUZ while screen is ref
reshed
0030 0006 '      AS      Used to store single input keystrokes
0030 0006 '      CS      Used to store special graphics character
s used in drawing the menu table
0030 0006 '      IX      Counter used to refresh display
0030 0006 '      RX      Row in which special graphics character
is displayed
0030 0006 '      CX      Column in which special graphics charac
ter is displayed
0030 0006 REM $PAGE

```

Reagent Jet Printer
Main Line Code

PAGE 3
07-09-86
15:27:04

25

30

35

40

45

50

55

```

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00
0030 0006
0030 0006 'Main-line code for RJP Reagent Jet Printer
0030 0006 MAIN.LINE.CODE:
0030 0006
0030 0006      GOSUB INITIALIZE
0043 0006
0046 0006      WHILE TYPE1 <> 3
0056 0008
0056 0008          TYPE1 = 0
005D 0008          AS = ""
0067 000C          WHILE AS = ""
0076 000C              AS = INKEY$
0080 000C          WEND
0083 000C
0083 000C          IF AS = CHR$(0) + CHR$(72) THEN TYPE1 = 1:
up arrow
00A8 000C          IF AS = CHR$(0) + CHR$(80) THEN TYPE1 = 2:
down arrow
00CD 000C          IF AS = CHR$(13) THEN TYPE1 = 3:
(cr) execute command
00E7 000C
00E7 000C          ON TYPE1 GOSUB T1, T2, T3
00F6 000C
00F6 000C      WEND
00FA 000C
00FA 000C      CLS
0101 000C      COLOR 7,0,0
0112 000C      SYSTEM
0116 000C
0116 000C REM $PAGE

```

0 268 237

```

Reagent Jet Printer
Main Line Code
PAGE 4
07-09-86
15:27:04
ISN Personal Computer BASIC Compiler V2.00

Offset Data Source Line
0116 000C '***** SUB-ROUTINES FOR MAIN PROGRAM
10 0116 000C T1: 'up arrow
011B 000C IF MENUZ = 0 THEN RETURN
012A 000E DIFFZ = -1
0131 0010 GOSUB NEW.MENU
0137 0010 RETURN
15 013B 0010
013B 0010 T2: 'down arrow
0140 0010 IF MENUZ = 5 THEN RETURN
014F 0010 DIFFZ = 1
0156 0010 GOSUB NEW.MENU
20 015C 0010 RETURN
0160 0010
0160 0010 T3:
0165 0010 ON MENUZ + 1 GOSUB T31, T32, T33, T34, T35, T36
017C 0010 IF MENUZ < 5 THEN TYPEZ = 0: reset TYPEZ so program
25 won't end
018E 0010 SCREEN 0,0,3,3
01A5 0010 RETURN
01A9 0010
01A9 0010 T31: 'pattern definition
30 01AE 0010 CALL PATENTRY: 'in module PATENT
01BA 0010 GOSUB REFRESH
01C0 0010 RETURN
01C4 0010
01C4 0010 T32: 'pattern filing
35 01C9 0010 SCREEN 0,0,0,0:CLS
01E5 0010 CALL PATIERN.FILE: 'in module PATFILE
01F1 0010 RETURN
01F5 0010
01F5 0010 T33: 'reagent calibration
40 01FA 0010 CALL REAGENT.CALIBRATE: 'in module REACAL
0206 0010 RETURN
020A 0010
020A 0010 T34: 'reagent filing menu
020F 0010 SCREEN 0,0,0,0:CLS
45 022B 0010 CALL REAGENT.FILE: 'in module REAFILE
0237 0010 RETURN
023B 0010
023B 0010 T35: 'print pattern
0240 0010 CALL PATPRINT: 'in module PATPRINT
50 024C 0010 RETURN
0250 0010
0250 0010 T36: 'exit system, don't reset TYPEZ
0255 0010 RETURN
55 0259 0010 REM $PAGE

```

0 268 237

Reagent Jet Printer
Main Line Code

PAGE 5
07-09-86
15:27:04

Offset Data Source Line IBM Personal Computer BASIC Coasiler V2.00

```

5      0259 0010 KEY.MENU:
      025E 0010 GOSUB MENU.OFF
      0264 0010 MENU1 = MENU1 + DIFF1
      0270 0010 GOSUB MENU.ON
10     0276 0010 RETURN
      027A 0010
      027A 0010 INITIALIZE:
      027F 0010 CALL PCI.INIT
      028B 0010
15     028B 0010 define and initialize arrays
      028B 0010 DIM KROWZ(5)
      028C 0010 KROWZ(0) = 4
      029E 0010 KROWZ(1) = 6
      02B1 0010 KROWZ(2) = 10
20     02C4 0010 KROWZ(3) = 12
      02D7 0010 KROWZ(4) = 16
      02EA 0010 KROWZ(5) = 20
      02FD 0010
      02FD 0010 DIM MENUS(5,1)
25     02FE 004C RESTORE MENU.STRING.DATA
      0305 004C FOR IZ = 0 TO 5
      030B 004C READ MENUS(IZ,0),MENUS(IZ,1)
      033B 004E NEXT IZ
      034B 004E
30     034B 004E set initial values into variables
      034B 004E TYPE1 = 0
      0352 004E MENU1 = 0
      0359 004E
      0359 004E REFRESH: redraw screen and highlight current menu selection
35     035E 004E
      035E 004E SCREEN 0,0,0,0:CLS:COLOR 7,0,0
      038B 004E LOCATE 10,32:PRINT "Loading Menu....."
      03A5 004E SCREEN 0,0,3,0:CLS
40     03C2 004E
      03C2 004E COLOR 13,0
      03CE 004E LOCATE 1,31
      03DB 004E PRINT "REAGENT JET PRINTER";
      03EB 004E COLOR 10,0
45     03F4 004E LOCATE 5,26
      0401 004E PRINT "PATTERN"
      040E 004E LOCATE 11,26
      041B 004E PRINT "REAGENT"
      042B 004E LOCATE 16,26
50     0435 004E PRINT "PRINTING"
      0442 004E LOCATE 20,27
      044F 004E PRINT "SYSTEM"
      045C 004E
      045C 004E draw the menu table in special graphics characters
55     045C 004E COLOR 9,0
      046B 004E FOR IZ = 18 TO 63
      046F 004E LOCATE 2,IZ:PRINT "D";
      048A 004E LOCATE 8,IZ:PRINT "D";
      04A5 004E LOCATE 14,IZ:PRINT "D";

```

Reagool Jet Printer
Main Line Code

PAGE 6

07-09-86

15:27:04

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

```

6      04C0 004E      LOCATE 18,11:PRINT "D";
      04DB 004E      LOCATE 22,11:PRINT "D";
      04F6 004E      LOCATE 24,11:PRINT "D";
      0511 004E      NEXT I1
10     0524 004E      FOR I1 = 3 TO 23
      052B 004E      LOCATE 11,17:PRINT "J";
      0546 004E      LOCATE 11,64:PRINT "J";
      0581 004E      NEXT I1
      0571 004E      RESTORE TABLE
15     057B 004E      FOR I1 = 1 TO 12
      057F 004E      READ R1,C1,C5
      0592 0056      LOCATE R1,C1:PRINT C5;
      05AE 0054      NEXT I1
      05BE 0054
20     05BE 0056      print the instructions
      05BE 0056      COLOR 7,0
      05CA 0056      LOCATE 25,6
      05D7 0056      PRINT "Use or to highlight menu items. Use to
      activate selection.";
25     05E4 0056
      05E4 0056      COLOR 15,0
      060A 0056      LOCATE 25,15:PRINT "";
      0624 0056      LOCATE 25,47:PRINT "D";
30     063E 0056
      063E 0056      display the 6 menu choices
      063E 0056      TEMP1 = MENU1
      0645 0058      FOR MENU1 = 0 TO 5
      064B 0058      GOSUB MENU.OFF
35     0651 0058      NEXT MENU1
      0661 0058      MENU1 = TEMP1
      0668 0058
      0668 0058      highlight the currently active menu item
      0668 0058      GOSUB MENU.ON
40     066E 0058
      066E 0058      SCREEN 0,0,3,3
      0685 0058      RETURN
      0687 0058
      0687 0058      MENU.ON: highlight the menu MENU1 and display its long description
45     068E 0058      COLOR 0,7
      069A 0058      LOCATE XROW1(MENU1),52-LEN(MENU$(MENU1,0))/2
      06DA 0058      PRINT MENU$(MENU1,0);
      06F6 0058      COLOR 7,0
50     0704 0058      LOCATE 23,40.5-LEN(MENU$(MENU1,1))/2
      073B 0058      PRINT MENU$(MENU1,1);
      0757 0058      RETURN
      075B 0058
      075B 0058      MENU.OFF: un-highlight menu MENU1 and erase long description
55     0760 0058      COLOR 14,0
      076C 0058      LOCATE XROW1(MENU1),52-LEN(MENU$(MENU1,0))/2
      07AC 0058      PRINT MENU$(MENU1,0);
      07CA 0058      COLOR 7,0
      07D6 0058      LOCATE 23,40.5-LEN(MENU$(MENU1,1))/2

```

5

10

75

20

25

Reagent Jet Printer Main Line Code

PAGE 7
07-09-86
15:27:04

Offset Data Source Line IBM Personal Computer BASIC Compiler V2.00

30

```
060A 005B PRINT SPACE$(LEN(MENU$(MENUZ,1)));
062F 605B RETURN
0833 005B
0833 005B REM $PAGE
```

35

40

45

50

55

0 268 237

Reagent Jet Printer
Main Line Code

PAGE 8
07-09-86
15:27:04

```

5      Offset Data   Source Line   IBM Personal Computer BASIC Compiler V2.00

      0833 0058 ***** DATA FIELDS USED BY THE MAIN PROGRAM *****
      0833 0058
10     0833 0058 MENU.STRING.DATA:      'first entry is menu name, second is lo
      og description
      0838 0058
      0838 0058 DATA "DEFINITION", "Create and Modify Patterns"
      083A 0058 DATA "FILING", "Delete, Copy, Rename, and Select Pa
15     tterns"
      083C 0058 DATA "CALIBRATION", "Calibrate and Modify Reagent Profil
      es"
      083E 0058 DATA "FILING", "Delete, Copy, Rename, and Select Re
20     agents"
      0840 0058 DATA "PRINT", "Print Selected Pattern with Selecte
      d Reagent"
      0842 0058 DATA "EXIT TO DOS", "Leave Program and Return to DOS"
      0844 0058
      0844 0058 TABLE: 'first entry is row, second is column, third is special
25     graphics character
      0849 0058
      0849 0058 DATA 2,17,"2"
      084B 0058 DATA 2,64,"7"
      084D 0058 DATA 8,17,"C"
      084F 0058 DATA 8,64,"4"
30     0851 0058 DATA 14,17,"C"
      0853 0058 DATA 14,64,"4"
      0855 0058 DATA 18,17,"C"
      0857 0058 DATA 18,64,"4"
      0859 0058 DATA 22,17,"C"
35     085B 0058 DATA 22,64,"4"
      085D 0058 DATA 24,17,"2"
      085F 0058 DATA 24,64,"Y"
      0861 0058
      0861 0058 END
40     0865 0058
      0842 0058

```

50426 Bytes Available
47680 Bytes Free

0 Warning Error(s)
0 Severe Error(s)

50 Claims

1. A dispensing system for use in diagnostic instruments for precise metering of a desired diagnostic fluid, the system comprising:
 - 55 a jetting chamber defining a volume and comprising a first and second aperture, the first aperture adapted to receive diagnostic fluid, the second aperture defining an orifice;
 - a transducer in mechanical communication with the jetting chamber, the transducer operative to alternately expand and de-expand the volume of the jetting chamber in response to a selected electrical pulse and

thereby cause the jetting chamber to emit a substantially uniformly sized droplet of diagnostic fluid through the orifice; and

means for generating a number of electrical pulses sufficient to cause a desired quantity of the diagnostic fluid to be dispensed.

5 2. The invention of Claim 1 wherein the system further comprises:

at least one additional jetting chamber in fluid communication with an additional diagnostic fluid;

at least one additional transducer in mechanical communication with the additional jetting chamber;

at least one additional means for applying an electrical pulse to the additional transducer;

10 means for generating respective numbers of electrical pulses sufficient to cause precise quantities of the diagnostic fluids to be dispensed in a desired volumetric ratio; and

a receptacle adapted for and positioned to receive the fluids.

15 3. The invention of Claim 1 wherein the system further comprises:

means for directing at least one of (1) the receptacle and (2) the emitted diagnostic fluid and the emitted additional diagnostic fluid such that desired quantities of the fluids are dispensed into the receptacle in a predefined dispensing order.

4. The invention of Claim 1 wherein one of the diagnostic fluids comprises serum and wherein the jetting chambers cooperate such that the other diagnostic fluid is emitted in a manner to contact and mix with the serum.

5. The invention of Claim 1 wherein the jetting chamber comprises a cylindrical tube and wherein the 20 transducer is mounted concentrically about the cylindrical tube.

6. The invention of Claim 1 wherein the jetting chamber is conically shaped.

7. The invention of Claim 1 wherein the jetting chamber comprises at least one chamber wall which is integrally formed with the transducer.

8. The invention of Claim 1 wherein the transducer is one of (1) a piezo-electric transducer; (2) a 25 magneto-strictive transducer; (3) an electro-strictive transducer; and (4) an electro-mechanical transducer.

9. The invention of Claim 1 wherein the jetting chamber is conically shaped; and wherein the transducer is disc shaped and forms the base of the conically shaped jetting chamber.

10. The invention of Claim 1 wherein the orifice comprises an end face and the end face is coated with a hydrophobic polymer.

30 11. The invention of Claim 1 wherein the transducer is cylindrically shaped and comprises a first electrode located on the inner wall of the cylinder and wraps around one end of the cylinder and wherein a second electrode is located substantially on the outer wall of the cylinder and is electrically isolated from the first electrode.

12. The invention of Claim 1 wherein the means for generating produces an electrical pulse of selected 35 rise and fall time constants and of selected duration, voltage and polarity.

13. The invention of Claim 1 wherein the means for generating the electrical pulse comprises means for scaling the voltage of the pulse in response to a selectable digital value.

14. The invention of Claim 1 wherein the apparatus further comprises means for directing the emitted diagnostic fluid along a desired path.

40 15. A method of dispensing precise quantities of diagnostic fluids comprising the steps of:

(a) generating an electrical pulse of predefined characteristics;


(b) reducing the volume of a chamber containing the diagnostic fluid by electro-mechanical means in response to the electrical pulse such that a droplet of fluid of known volume is propelled through an orifice in the chamber; and

45 (c) repeating steps (a) and (b) until a desired quantity of the diagnostic fluid has been dispensed

50

55

FIG. 1

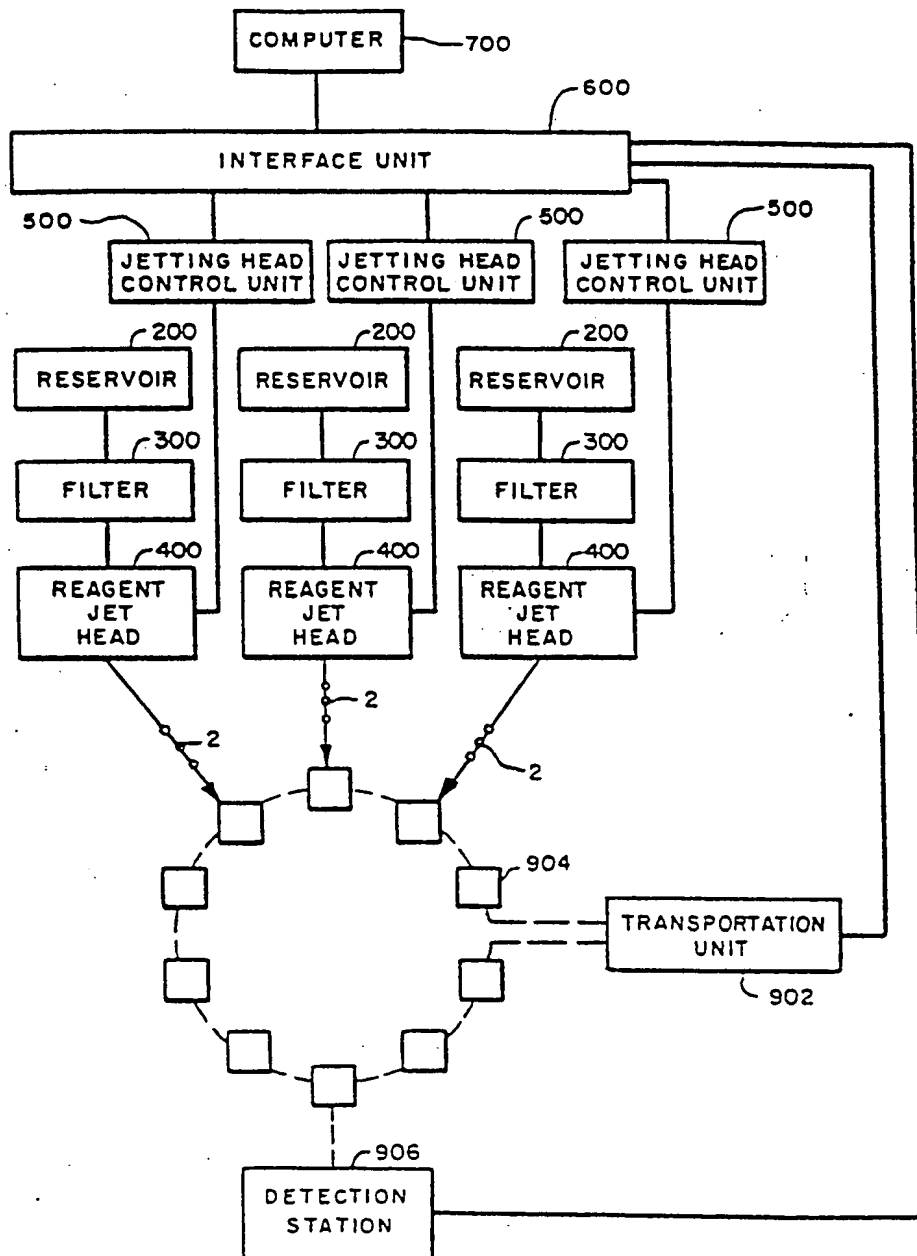

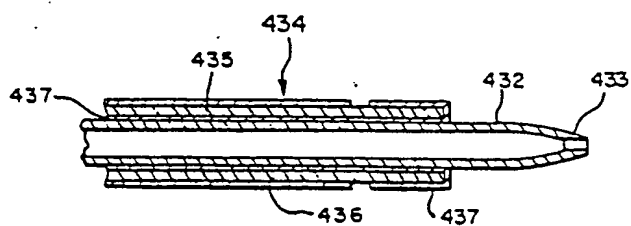
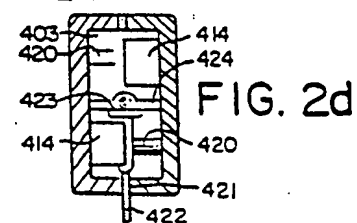
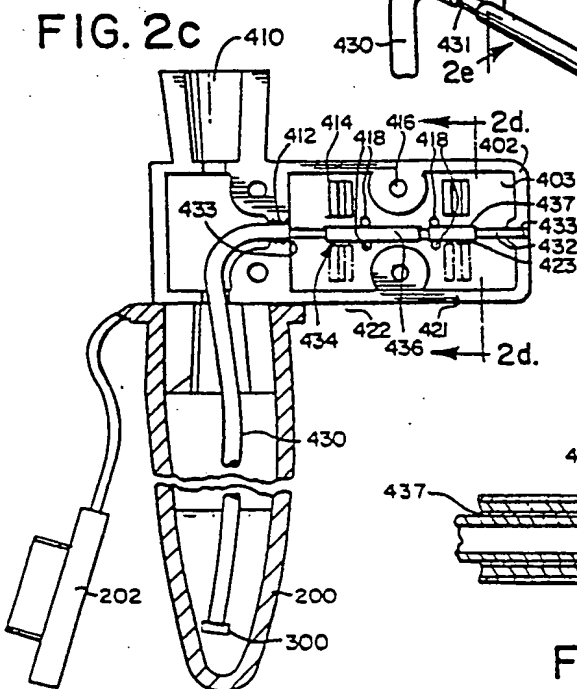
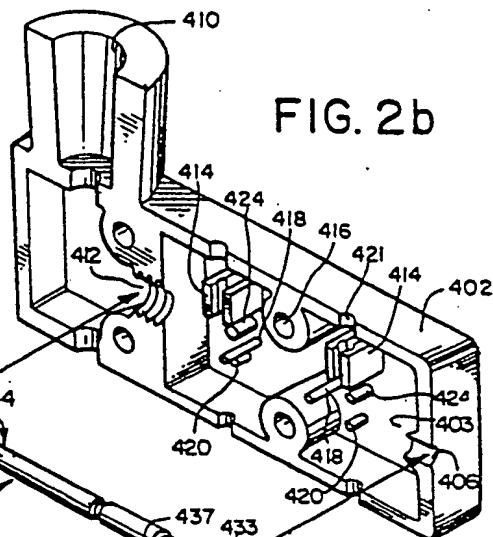
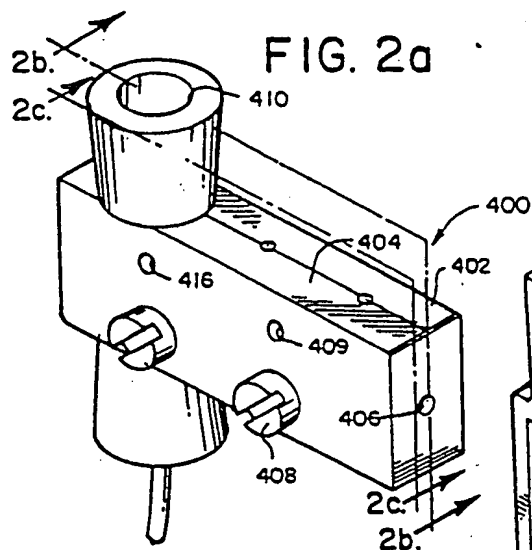


FIG. 3

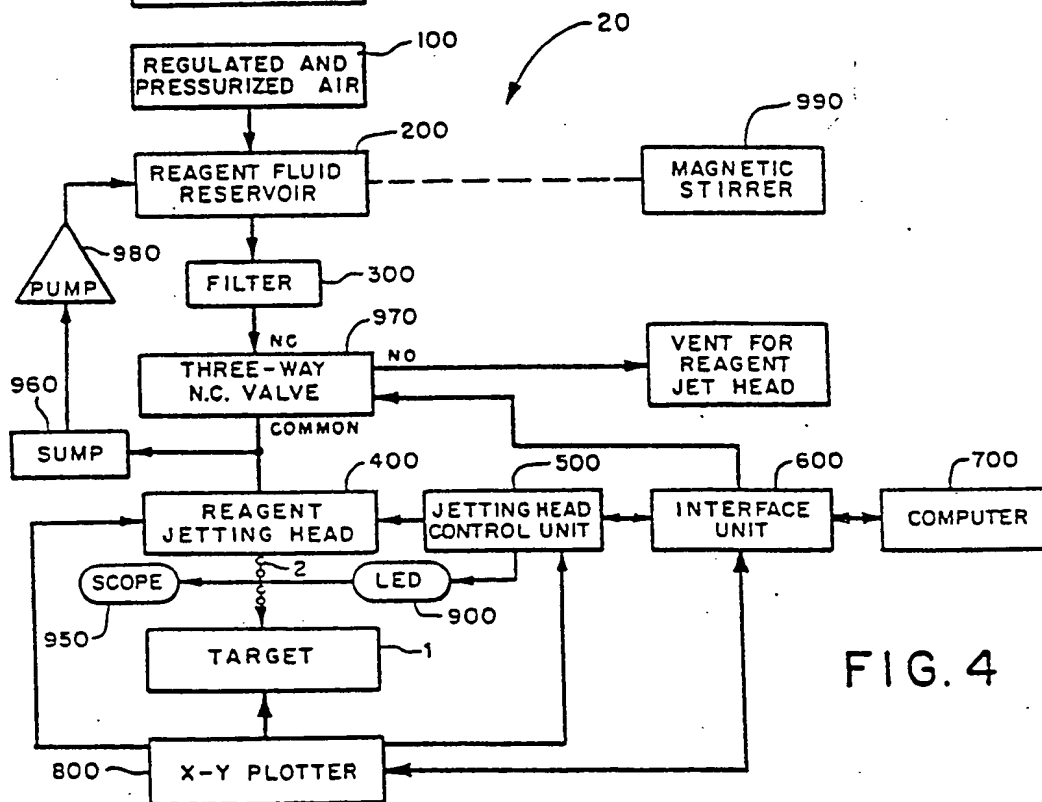
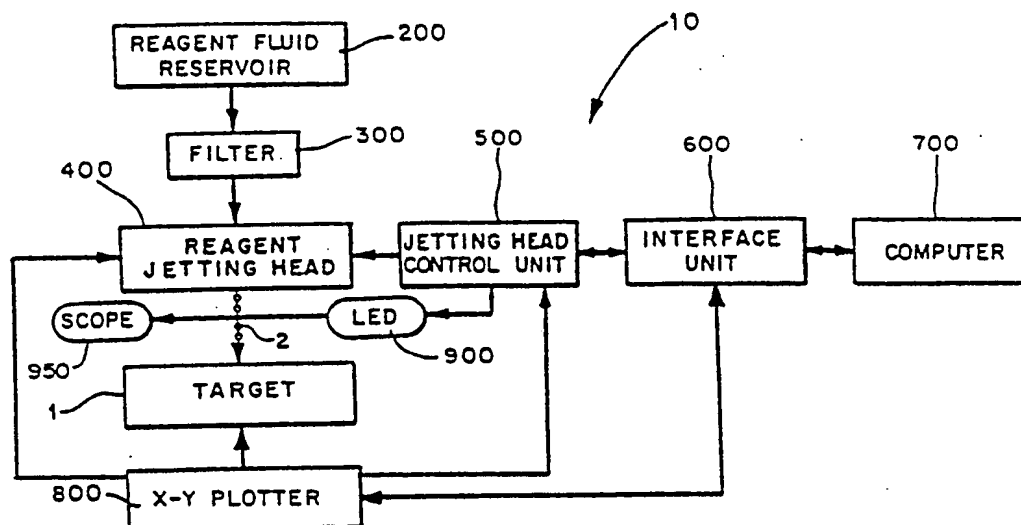


FIG. 4

FIG. 5a

FIG. 5b



FIG. 5C

0-268 237
M04-08-95

FIG. 5d

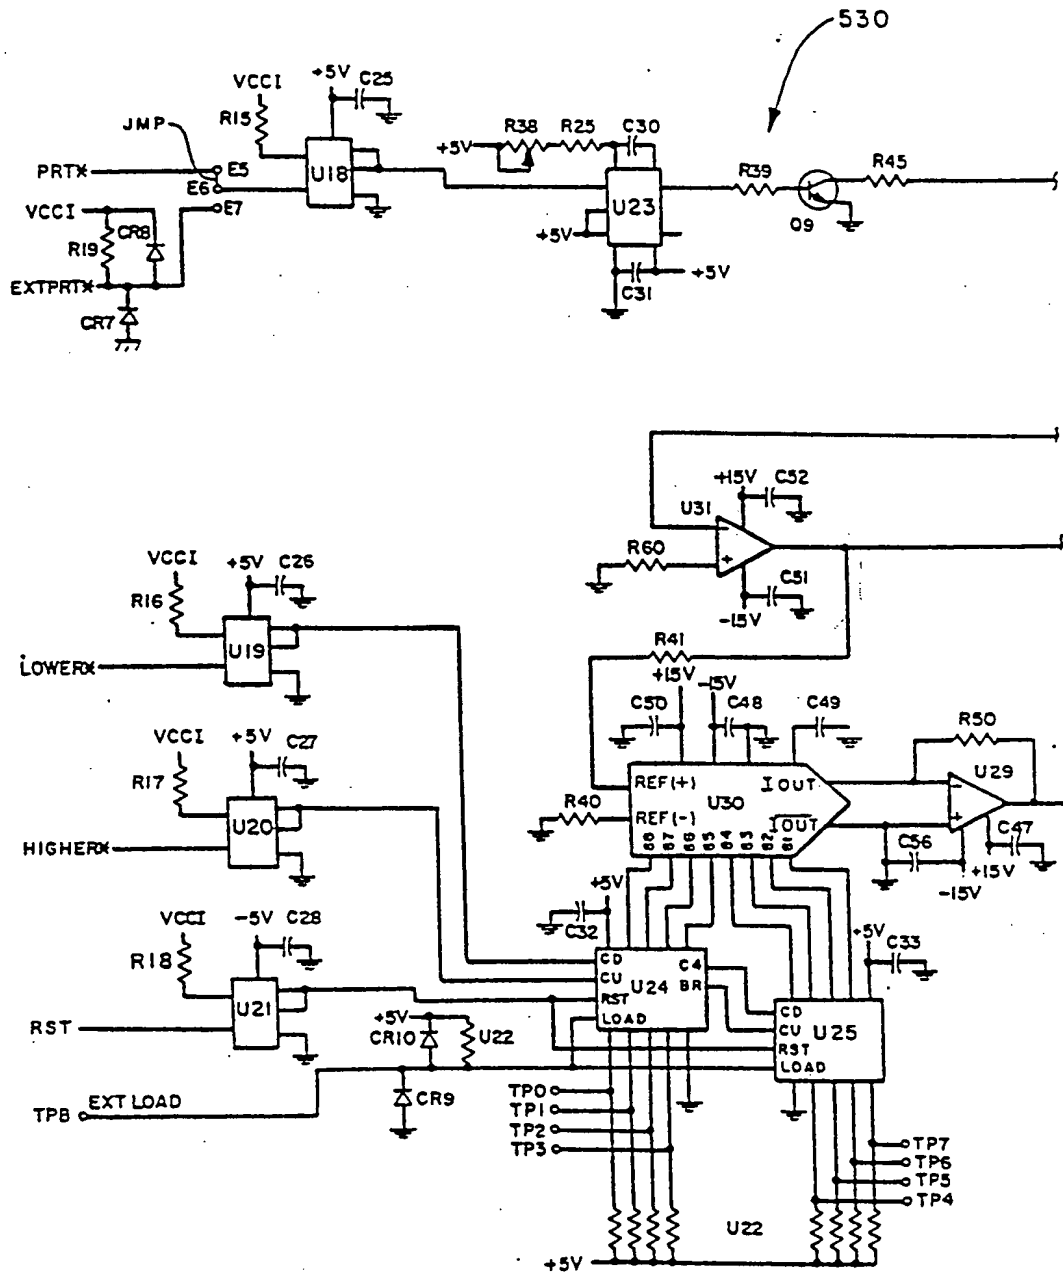


FIG. 5e

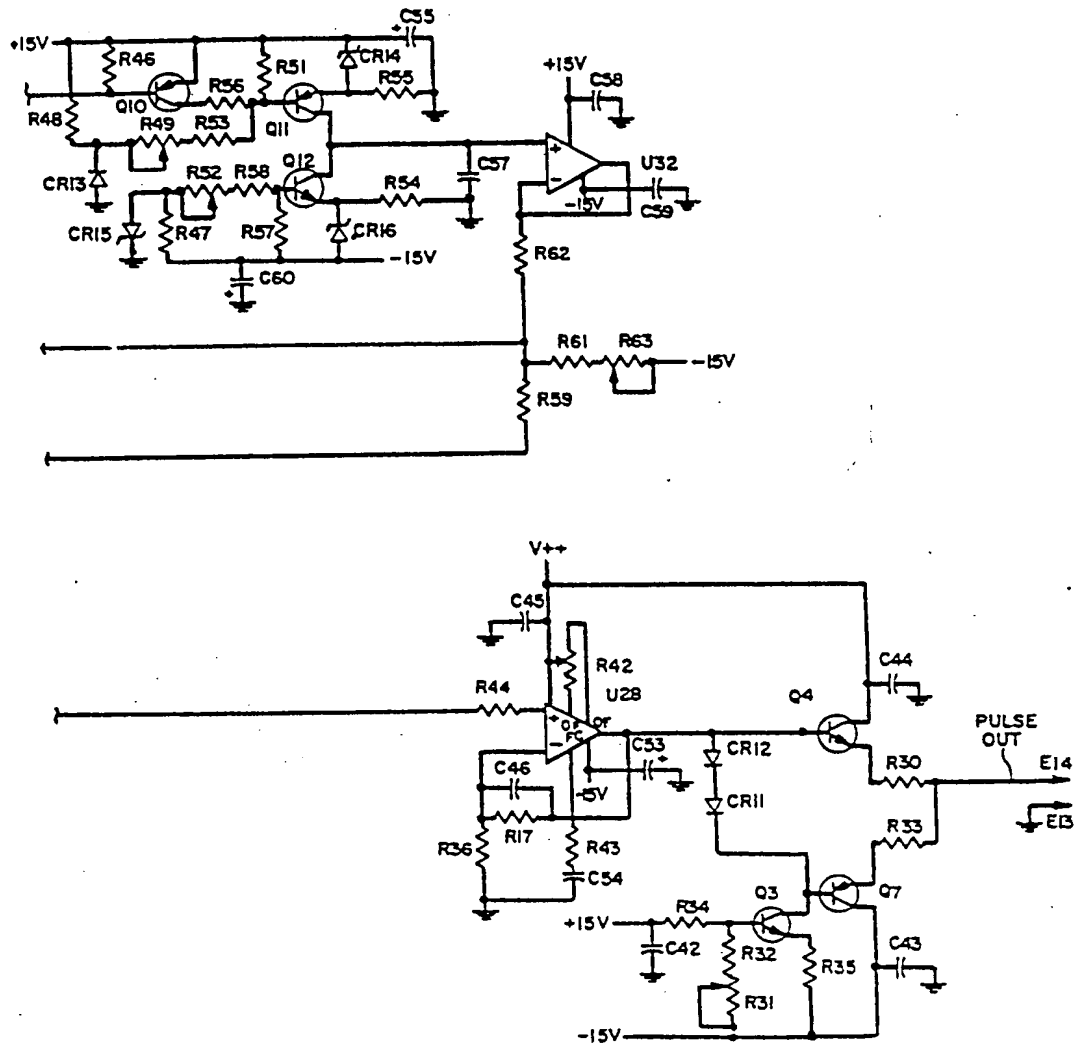


FIG. 6a

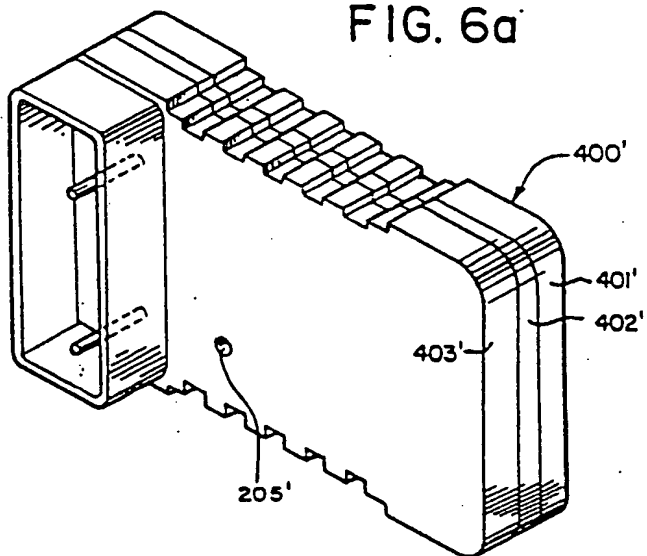


FIG. 7


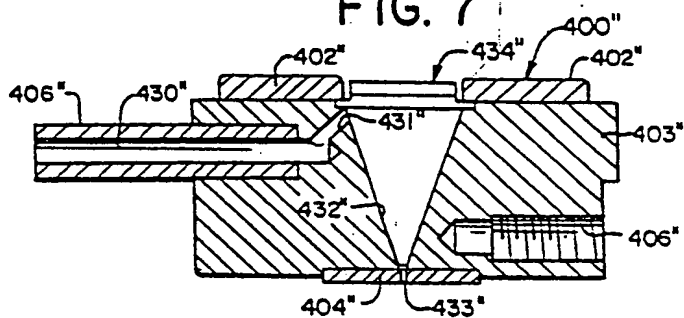


FIG. 8



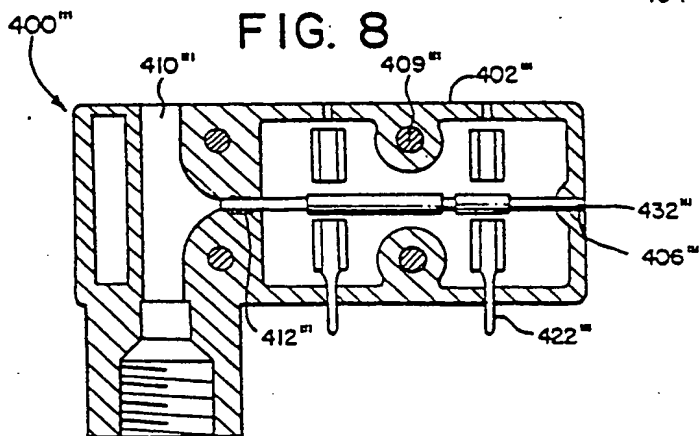

0 268 237
 NOV 08 95

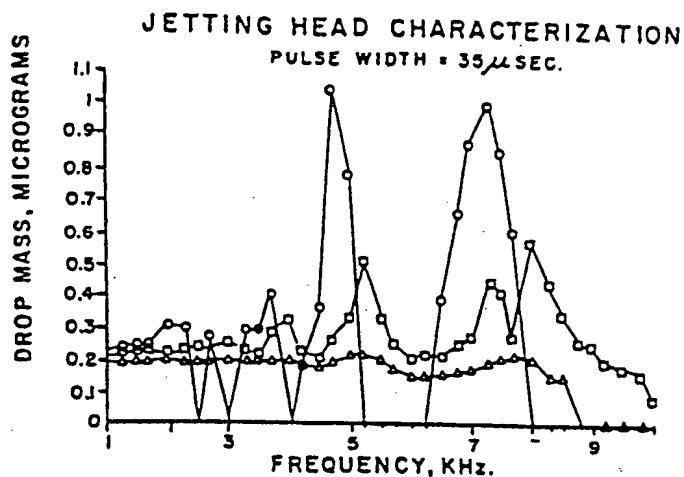


FIG. 9

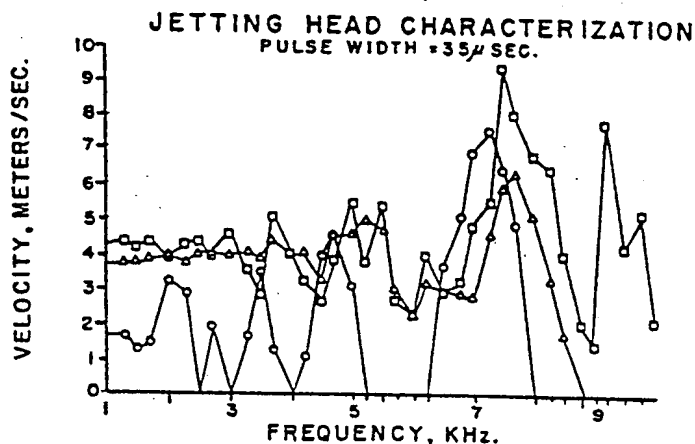


FIG. 10

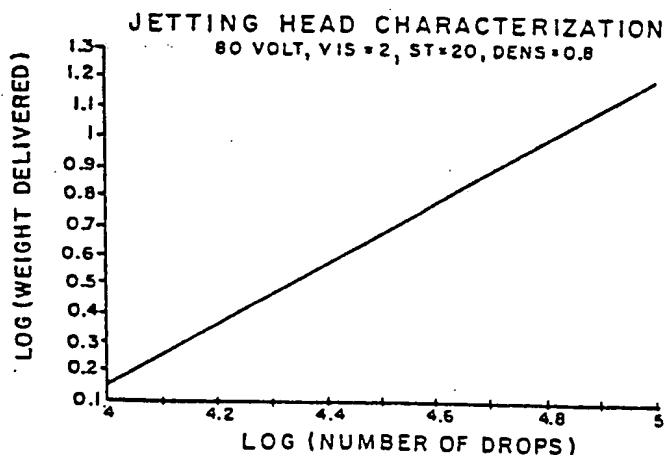


FIG. 11